

1N4148WS-HAF


Silicon Epitaxial Planar Switching Diode

Features

- Fast switching
- Halogen and Antimony Free(HAF), RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

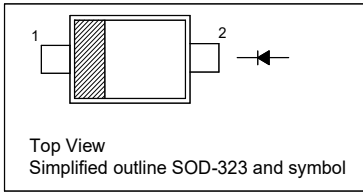


Absolute Maximum Ratings (T_a = 25°C)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V _{RM}	100	V
Reverse Voltage	V _R	75	V
Average Rectified Forward Current	I _{F(AV)}	150	mA
Surge Forward Current at t < 1 μs at t < 1 s	I _{FSM}	2 1	A
Power Dissipation	P _D	200	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	- 65 to + 150	°C

Thermal Characteristics

Parameter	Symbol	Max.	Unit
Thermal Resistance from Junction to Ambient ¹⁾	R _{θJA}	625	°C/W


¹⁾ Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.



1N4148WS-HAF

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 1\ \mu\text{A}$	$V_{(BR)R}$	75	-	V
Forward Voltage at $I_F = 1\ \text{mA}$ at $I_F = 10\ \text{mA}$ at $I_F = 50\ \text{mA}$ at $I_F = 150\ \text{mA}$	V_F	- - - -	0.715 0.855 1 1.25	V
Peak Reverse Current at $V_R = 75\ \text{V}$ at $V_R = 20\ \text{V}$ at $V_R = 75\ \text{V}$, $T_J = 150\ ^\circ\text{C}$ at $V_R = 25\ \text{V}$, $T_J = 150\ ^\circ\text{C}$	I_R	- - - -	1 25 50 30	μA nA μA μA
Total Capacitance at $V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_T	-	2	pF
Reverse Recovery Time at $I_{rr} = 0.1 \times I_R$, $I_F = 10\ \text{mA}$, $V_R = 6\ \text{V}$, $R_L = 100\ \Omega$	t_{rr}	-	4	ns



Electrical Characteristics Curves

Fig 1. Power Derating Curve

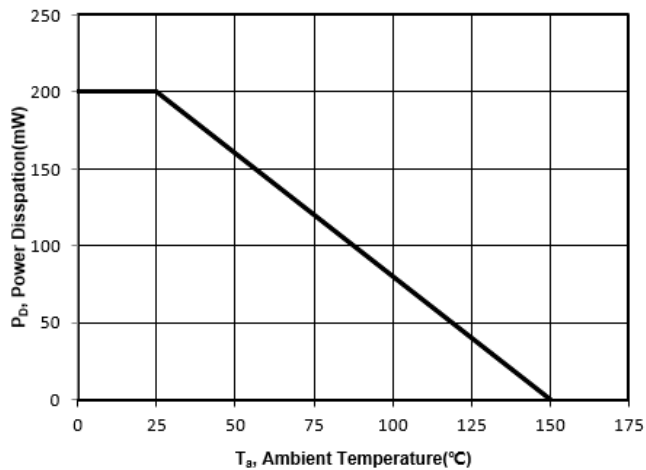


Fig 2. Capacitance Characteristics

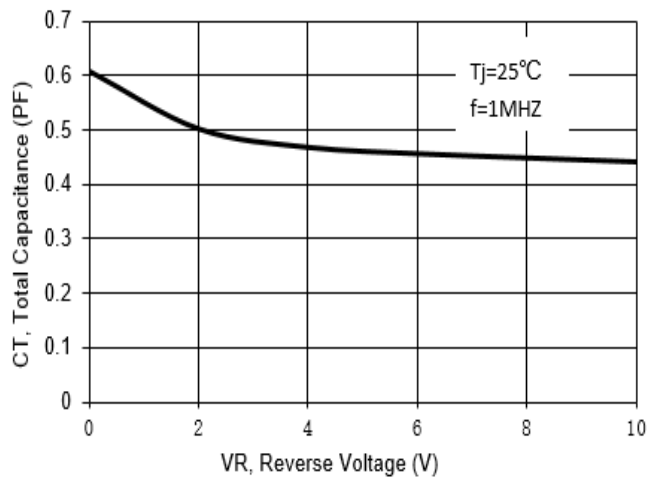


Fig 3. Reverse Characteristics



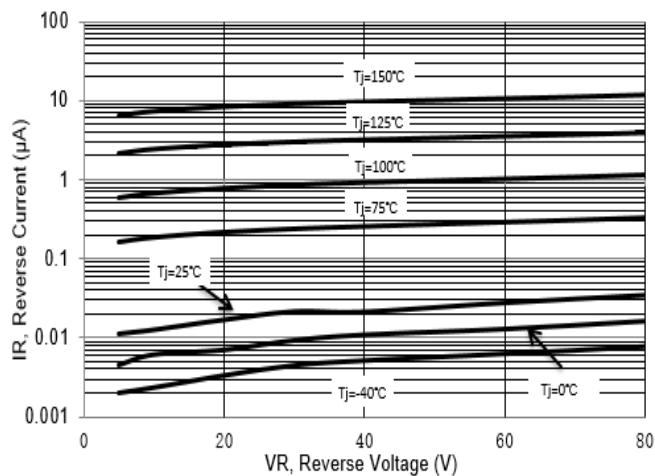


Fig 4. Forward Characteristics

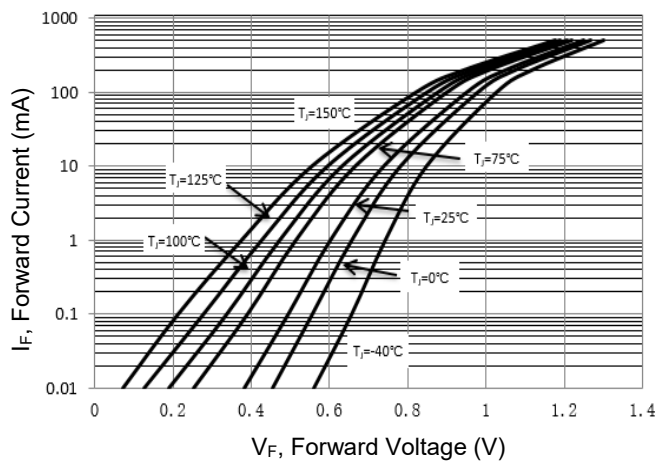


1N4148WS-HAF

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-323

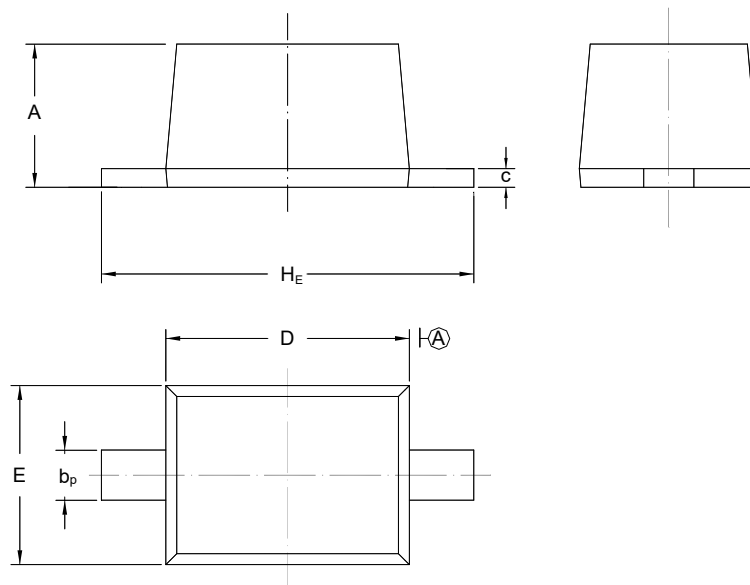

UNIT	A	b _p	C	D	E	H _E
mm	1.10 0.80	0.40 0.25	0.15 0.10	1.80 1.60	1.35 1.15	2.80 2.30

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-323	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" W2 " = Part No

" III " = Cathode line

" • " = HAF (Halogen and Antimony Free)

Font type: Arial

