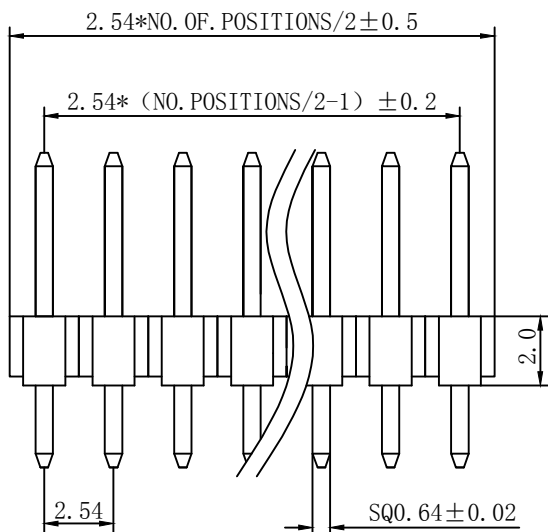
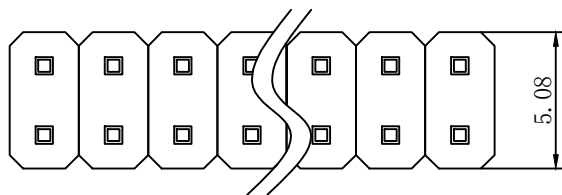


RECOMMENDED P.C.B LAYOUT

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

Specification

Insulator Material: Polysetr,UL94V-0
Standard: P A6T

Contact Material: Brass
Contact plated: Gold Over Nickel

Poles:2~40P (Double)
Current Rating : 3Amp
Contact Resistance:20 Milliohms Max
Insulation Resistace : 1000MΩ Min.
Dielectric withstanding Voltage:AC 500V
Operation Temperature : -40℃ -- +105℃

APPROVED:	DATE:	C _{kmtw} 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: 210S-2*XP L=17.0MM (PA6T)					
DRAWN: LYF	DATE: 2010-08-12	CLIENT P/N		/			
		UNIT	mm	SCALE	free	⊙	≡
		FILE NO.				REV.	A