

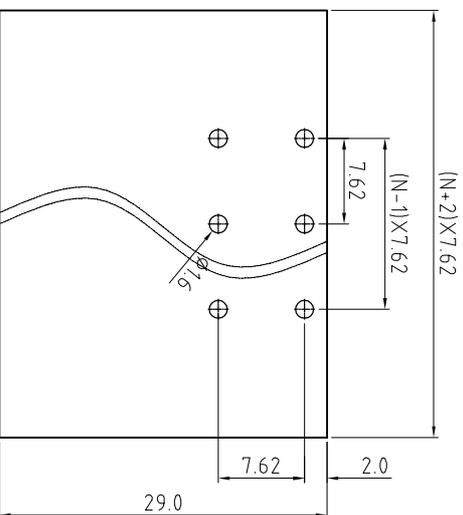



SIGN	DESCRIPTION	DATE	APPROVER

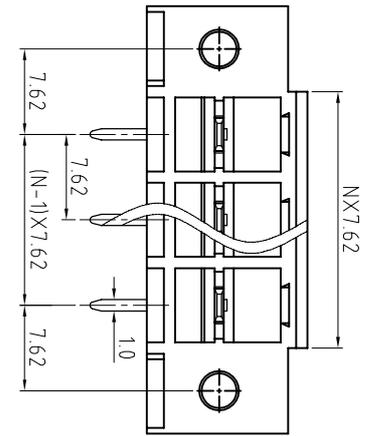

P.C.B. LAYOUT

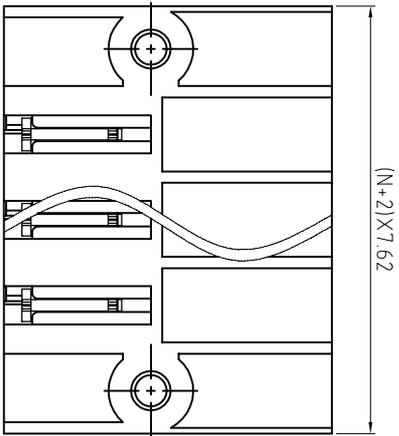

N=Number of contacts

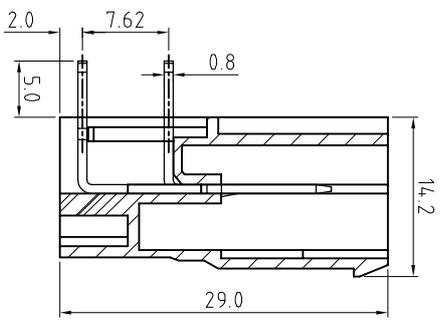

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Cr3+ plated

Terminal: Copper Alloy Tin plated

Insulator Body(housing): Polyamide(Glass filled)(UL 94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 42Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60Sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F87-8-G XX-0 0 X 0

- 5 Green
- 6 Blue
- 8 Grey
- A Black

WELINK 恒翔电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50		F87 - 8 - Pitch 7.62mm
XX ±0.30	CHECKED:	- Series
XXX ±0.20	DRAWN: Yang Ming	
X° ±1°	UNITS: mm	
	REV: A	PART NO: F878GXXX0000X0
	SCALE: 2 / 1	DWG NO: 9F878G001A
	PAGE: 1 / 1	