





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

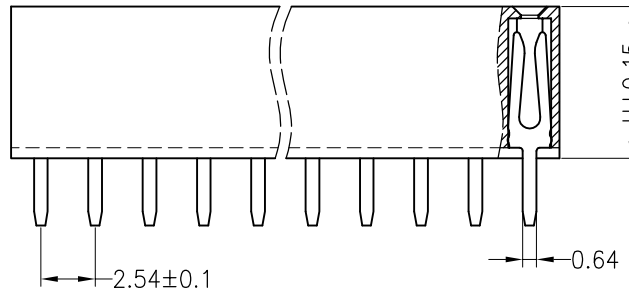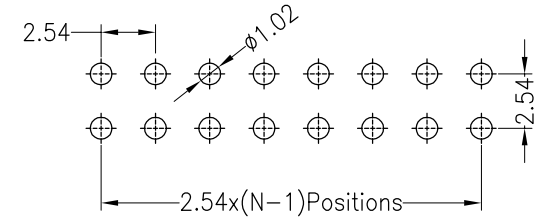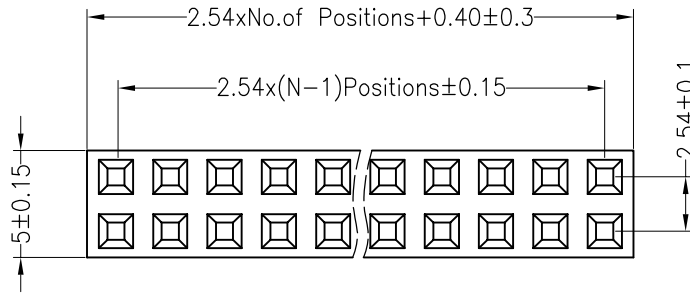

Ordering Information

F 3 N 2 04 1 5 01 X 0189
 产品类型 间距 绝缘高度 排数 单排PIN数 产品形态 绝缘材料 电镀厚度 包装方式
 F=插母 3=2.54 N=8.5 2=双排 1~40P 1=DIP 5=PA6T 00=常规 01=1u" 02=2u" 03=3u" 1=管装 2=卷装 3=盒装 4=袋装 5=盒装

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.0		8.5	5.0

深圳市连盛精密连接器有限公司

OPERATION		DRAW	SCALE	FIT	PART NO. 1020300111			
X.X	±0.30							
		CHECK	UNIT	mm	TITLE: 2.54FH H=8.5 W=5.0 2x4P DIP PC3.0 Y型 AU1U 青铜 PA6T			
			SIZE	A4				
A0	2012.04.26	NEW DRAWING	SHEET	1/1	APPROVE			
REV	DATE	MODIFICATION DESCRIPTION	PROJ.	◆				
1	2	3	4	5	6	7	8	9