





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

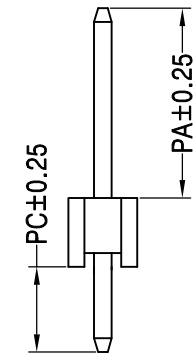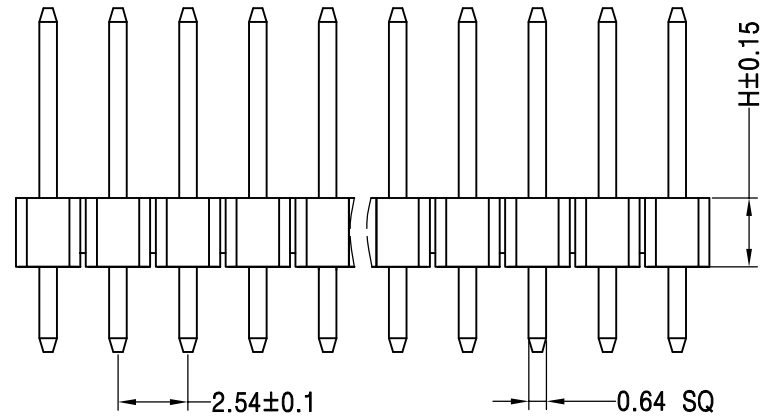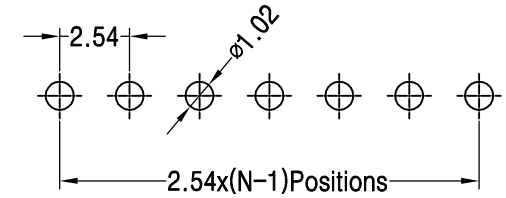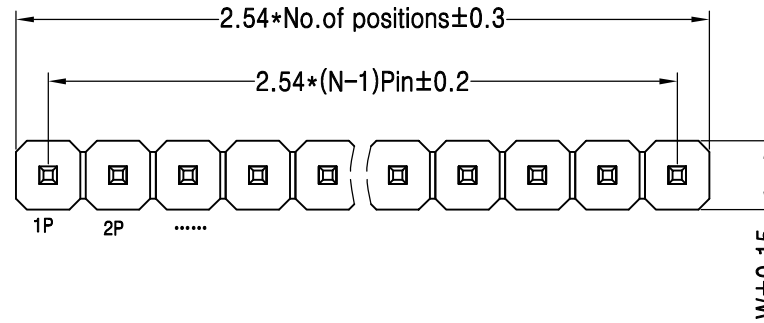

Ordering Information

P 3 D 1 16 1 5 00 X 0522

产品类型 P=排针
 间距 3=2.54
 塑胶高度 D=2.5
 排数 1=单排
 单排PIN数 1~40P
 产品形态 1=DIP
 塑胶材料 5=PA6T
 电镀厚度 00=常模
 包装方式 1=管装
 2=卷装
 3=盘装
 4=袋装
 5=盒装
 序列号

Dimension antitheses list								
ITEM	PA	PW	PC	L1	L2	L3	H	W
001	6.0		3.0	11.5			2.5	2.5
Alternate								

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm	PART NO. 1010300320			
				X.XX	±0.20	CHECK		SIZE	A4			TITLE: 2.54PH H=2.5 1x16P DIP PA6.0 PC3.0 L=11.5 AU0.6U PA6T	
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	APPROVE		SHEET	1/1				
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL			PROJ.	◆				
1	2	3	4	5	6	7	8	9					