

Features


- Leading trench technology for low $R_{DS(on)}$
- Low Gate Charge
- Excellent package for good heat dissipation

Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
-60V	345mΩ@-10V	-1.6A
	450mΩ@-4.5V	



Application

- Video monitor
- Power management



S9: Device code

Marking and pin assignment

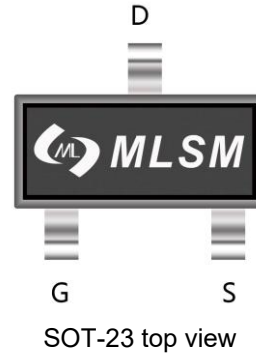

Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)


Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V_{DS}	Drain-Source Breakdown Voltage	-60	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
I_S	Diode Continuous Forward Current	$T_c=25^\circ\text{C}$ -1.4	A
Mounted on Large Heat Sink			
I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$ -8	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$ -1.6	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$ 1.7	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient	357	°C/W

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
Si2309CDS	SOT-23	S9	3,000	45,000	180,000	7"reel

Electrical Characteristics (T _J =25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
B _{V(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-60	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-60V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1	--	-3	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-1.25A	--	285	345	mΩ
		V _{GS} =-4.5V, I _D =-1.0A	--	360	450	mΩ
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =-30V, V _{GS} =0V, f=1MHz	--	210	--	pF
C _{OSS}	Output Capacitance		--	28	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	20	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =-30V, I _D =-1.25A, V _{GS} =-4.5V	--	2.7	--	nC
Q _{gs}	Gate Source Charge		--	0.8	--	nC
Q _{gd}	Gate Drain Charge		--	1.2	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =-30V, I _D =-1A, R _L =30Ω, V _{GS} =-4.5V, R _G =1Ω	--	40	--	nS
t _r	Turn-on Rise Time		--	35	--	nS
t _{d(off)}	Turn-Off Delay Time		--	15	--	nS
t _f	Turn-Off Fall Time		--	10	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =-0.75A	--	-0.8	-1.2	V


Typical Operating Characteristics

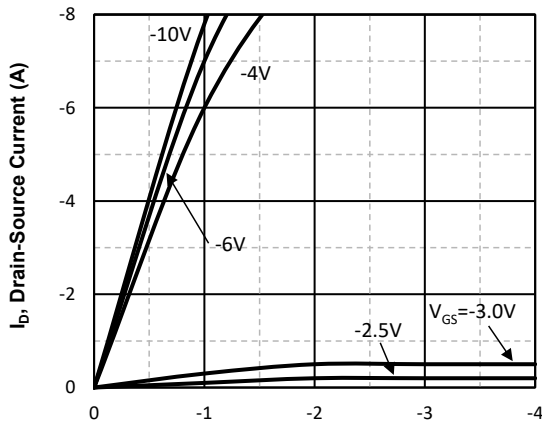


V_{DS} , Drain -Source Voltage (V)
Fig1. Typical Output Characteristics

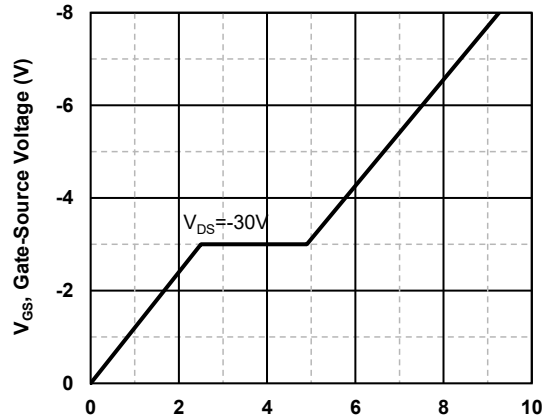


Q_g -Total Gate Charge (nC)
Fig2. Typical Gate Charge Vs. Gate-Source Voltage

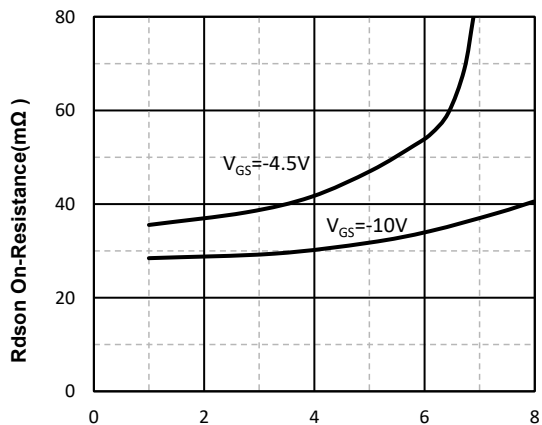


I_D , Drain-Source Current (A)
Fig3. Drain-Source on Resistance

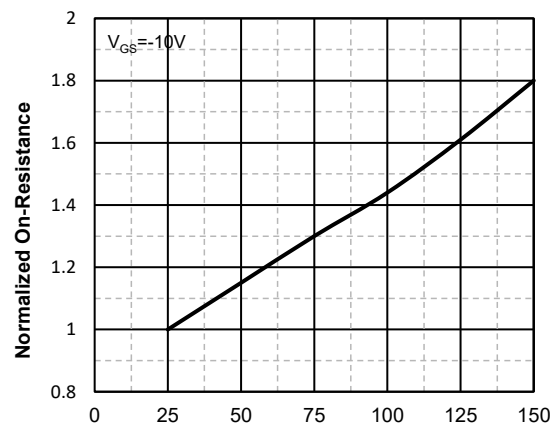


T_j - Junction Temperature ($^{\circ}C$)
Fig4. Normalized On-Resistance Vs. Temperature

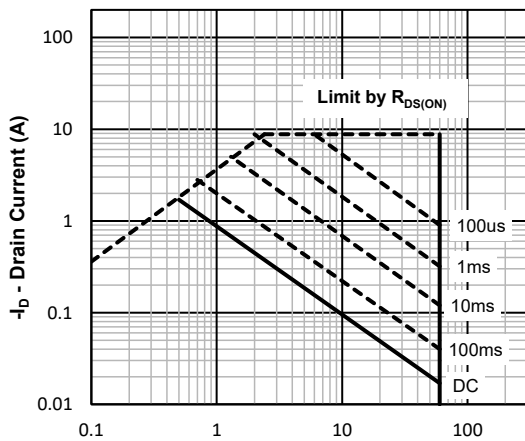

V_{DS} , Drain -Source Voltage (V)
Fig5. Maximum Safe Operating Area

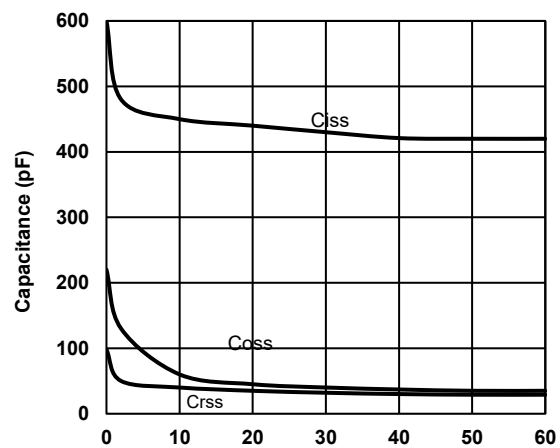

V_{DS} , Drain-Source Voltage (V)
Fig6 Typical Capacitance Vs. Drain-Source Voltage

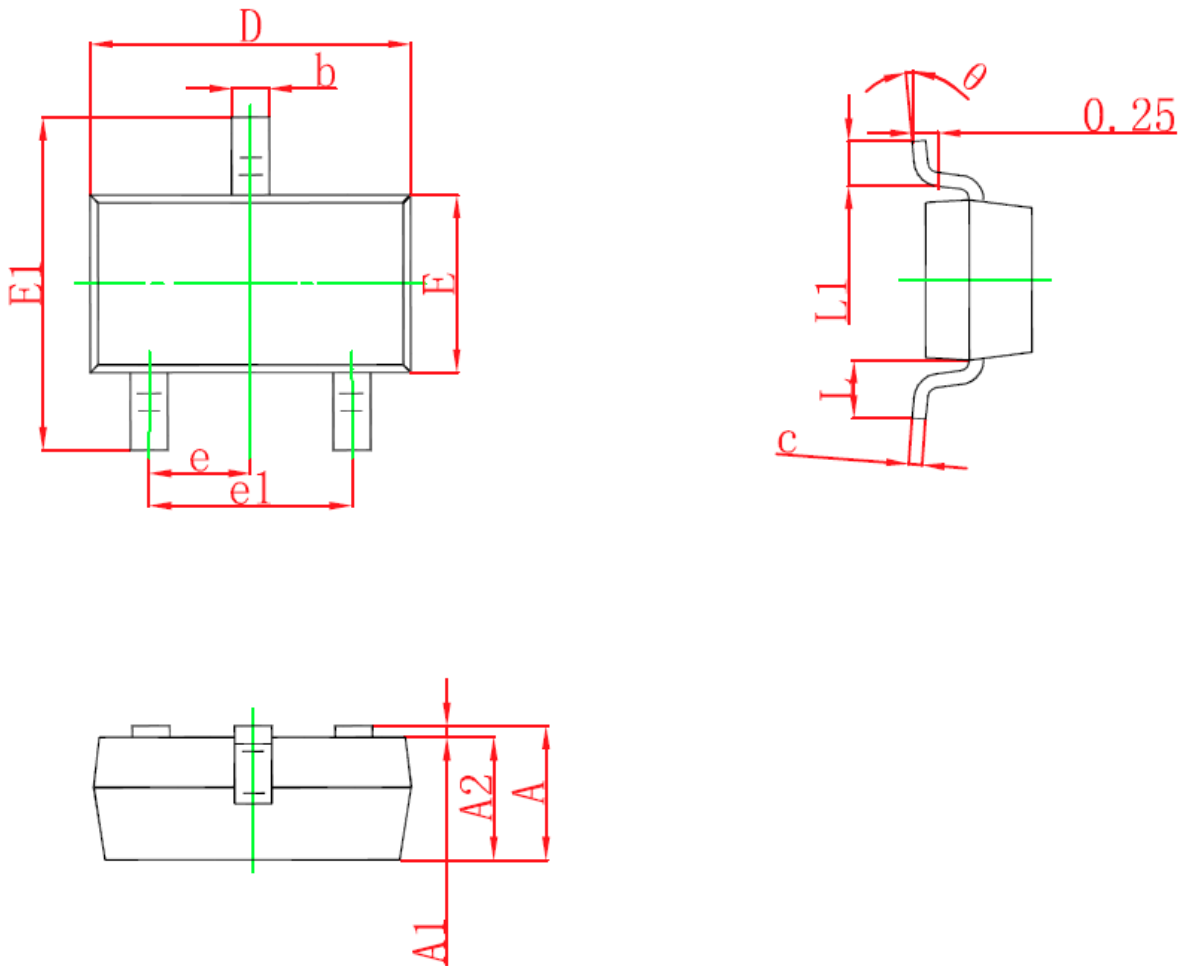SOT-23 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°