



Pushing Performance



People | Power | Partnership

HARTING

Circular Connectors

Contents

Chapter

Device side

M8	D03 08
M12	D03 12
M23	D03 23
7/8" HARAX®	D03 35
HARAX® panel feed throughs	D03 50

Cable side

M8	C03 08
M12	C03 12
M23	C03 23
7/8" HARAX®	C03 35

Cable assemblies	CAB 03
-------------------------------	---------------

Tooling	TOO 03
----------------------	---------------

Transforming customer wishes into concrete solutions



The HARTING Technology Group is skilled in the fields of electrical, electronic and optical connection, transmission and networking technology, as well as in manufacturing, mechatronics and software creation. The Group uses these skills to develop customized solutions and products such as connectors for energy and data-transmission/data-networking applications, including, for example, mechanical engineering, rail technology, wind energy plants, factory automation and the telecommunications sector. In addition, HARTING also produces electro-magnetic components for the automobile industry and offers solutions in the field of housing technology and shop systems.

The HARTING Group currently comprises 58 sales companies and production plants worldwide employing a total of about 5,300 staff.



HARTING Subsidiary



HARTING Representation

We aspire to top performance.

Connectors ensure functionality. As core elements of electrical and optical termination, connection and infrastructure technologies, they are essential in enabling the modular construction of devices, machines and systems across an extremely wide range of industrial applications. Their reliability is a crucial factor guaranteeing smooth functioning in the manufacturing area, telecommunications, applications in medical technology – in short, connectors are at work in virtually every conceivable application area. Thanks to the ongoing development of our technologies, our customers enjoy investment security and benefit from durable, long-term functionality.

Wherever our customers are, we're there.

Increasing industrialization is creating growing markets that are characterized by widely diverging demands and requirements. What these markets all share in common is the quest for perfection, increasingly efficient processes and reliable technologies. **HARTING** is providing these technologies – in Europe, the Americas and Asia. In order to implement customer requirements in the best possible manner, the **HARTING** professionals at our international subsidiaries engage in up-close, partnership-based interaction with our customers, right from the very early product development phase.

Our on-site staff form the interface to the centrally coordinated development and production departments. In this way, our customers can rely on consistently high, superior product quality – worldwide.

Our claim: Pushing Performance.

HARTING provides more than optimally attuned components. In order to offer our customers the best possible solutions, on request **HARTING** contributes a great deal more and is tightly integrated into the value-creation process.

From ready-assembled cables through to control racks or ready-to-go control desks. Our aim is to generate maximum benefit for our customers – with no compromises!

Quality creates reliability – and warrants trust.

The **HARTING** brand stands for superior quality and reliability – worldwide. The standards we set are the result of consistent, stringent quality management that is subject to regular certifications and audits.

EN ISO 9001, the EU Eco-Audit and ISO 14001:2004 are key elements here. We take a proactive stance towards new requirements, which is why **HARTING** is the first company worldwide to have obtained the new IRIS quality certificate for rail vehicles.



HARTING technology creates added value for customers.

Technologies by **HARTING** are at work worldwide. **HARTING's** presence stands for smoothly functioning systems powered by intelligent connectors, smart infrastructure solutions and sophisticated network systems. Over the course of many years of close, trust-based cooperation with its customers, the **HARTING** Technology Group has become one of the leading specialists globally for connector technology. We offer individual customers specific and innovative solutions that go beyond the basic standard functionalities. These tailored solutions deliver sustained results, ensure investment security and enable customers to achieve significant added value.

Opting for HARTING opens up an innovative, complex world of concepts and ideas.

In order to develop and produce connectivity and network solutions serving an exceptionally wide range of connector applications in a professional and cost-effective manner, **HARTING** not only commands the full array of conventional tools and basic technologies. Above and beyond these capabilities, **HARTING** is constantly harnessing and refining its broad base of knowledge and experience to create new solutions that also ensure continuity. To secure its lead in know-how, **HARTING** draws on a wealth of sources from its in-house research and applications.

Salient examples of these sources of innovative knowledge include microstructure technologies, 3D design and connection technolo-

gy, high-temperature and ultrahigh-frequency applications that are finding use in telecommunications and automation networks, in the automotive industry, or in industrial sensor and actuator applications, RFID and wireless technologies, in addition to packaging and housing made of plastics, aluminum and stainless steel.

HARTING overcomes technological limitations.

Drawing on the comprehensive resources of the group's technology pool, **HARTING** devises practical solutions for its customers. Whether this involves industrial networks for manufacturing automation, or hybrid interface solutions for wireless telecommunication infrastructures, 3D circuit carriers with microstructures, or cable assemblies for high-temperature applications in the automotive industry – **HARTING** technologies offer not only components, but comprehensive solutions attuned to individual customer requirements and preferences. The range of cost-effective solutions covers ready-to-use cable configurations, completely assembled backplanes and board system carriers, as well as fully wired and tested control panels.

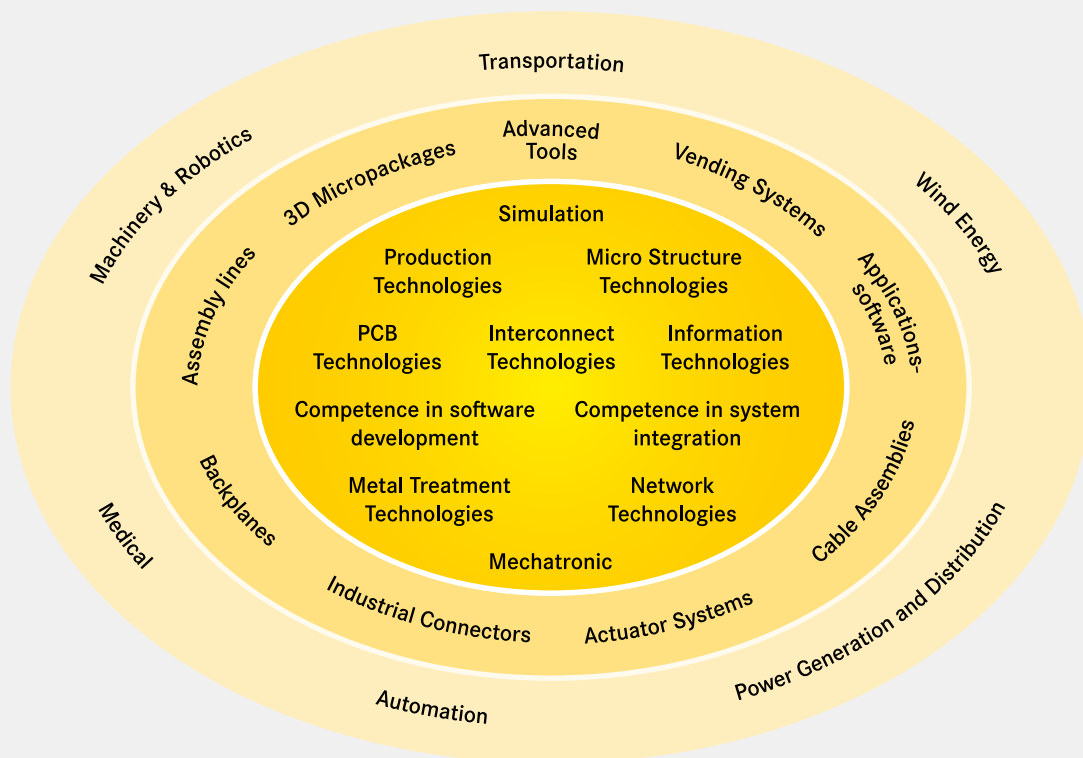
In order to ensure the future-proof design of RF and EMC-compatible interface solutions, the central **HARTING** laboratory (certified to EN 45001) employs simulation tools, as well as experimental, testing and diagnostics facilities all the way to scanning electron microscopes. In addition to product and process suitability considerations, lifecycle and environmental aspects play a key role in the selection of materials and processes.



HARTING's knowledge is practical know-how that generates synergy effects.

HARTING commands decades of experience with regard to the applications conditions involved in connections in telecommunications, computer, network and medical technologies, as well as industrial automation technologies, e.g. in the mechanical engineering and plant engineering areas, in addition to the power generation industry and the transportation sector. **HARTING** is highly

conversant with the specific application areas in all of these technology fields. In every solution approach, the key focus is on the application. In this context, uncompromising, superior quality is our hallmark. Every new solution found invariably flows back into the **HARTING** technology pool, thereby enriching our resources. And every new solution we go on to create will draw on this wealth of resources in order to optimize each and every individual solution. **HARTING** is synergy in action.





The **HARTING eCatalogue / eShop** can be found on our homepage at **www.HARTING.com** or at the direct link **www.eCatalogue.HARTING.com**.

The HARTING e-Catalogue is your platform for conveniently selecting individual products as well as configuring complete solutions. Our comprehensive product pages provide you with all necessary technical information and CAD files in various formats for downloading. You may also contact our technical sales department directly.

Find out about **product innovations and news** on the start page of the HARTING e-Catalogue or go directly to **www.product-news.HARTING.com**.

Registered users can take advantage of MyHARTING to check on availability or prices, and to place or track their orders. Here, your customized „HARTING history“ provides you with a list of your inquiries, quotations and more.

Sign up now for your free e-Catalogue account at HARTING!

www.eShop.HARTING.com



Contents

Page

PCB connectors.....

D03 08.2

Panel feed through

D03 08.15


Accessories

D03 08.17

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

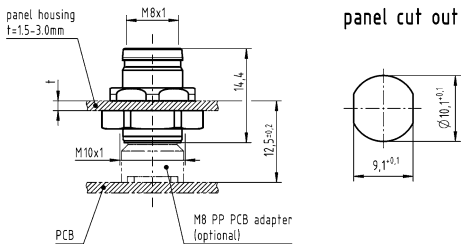
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated



Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

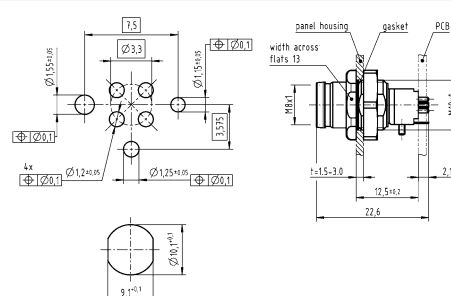
IEC 61076-2-114

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, PCB connector, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 50 pieces in a tray 	21 02 381 2418	
Order housings separately Circular connectors M8, PCB connector, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 25 pieces in a carton box 	21 02 381 2419	
Order housings separately		

Identification	Part number Female	Drawing (dimensions in mm)	
Circular connectors M8, Housing, for front mounting, Pack contents: incl. lock nut 	21 02 301 2001	 panel cut out 	
Circular connectors M8, Housing, for front mounting, Pack contents: without lock nut	21 02 301 2002		
Lock nut, M10 x 1	21 01 000 0051		

4

IEC 61076-2-114




Panel cut out

Number of contacts

4

Wave soldering termination
Shielded



M8

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Degree of protection acc. to IEC 60529	IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-114



Identification

Part number
Female

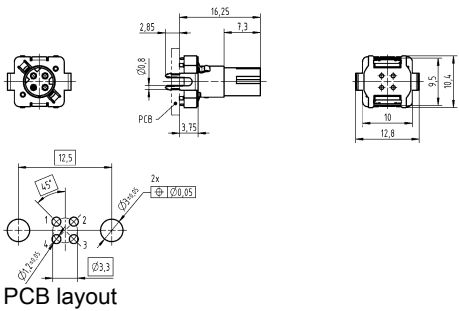
Drawing
(dimensions in mm)

Circular connectors M8,
PCB connector,
Straight,
Wave soldering termination,
Shielded

21 42 000 0006

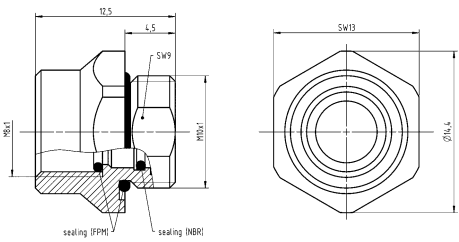


Order housings separately



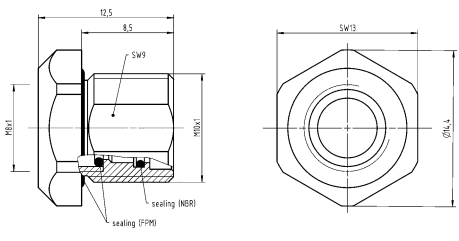
Circular connectors M8,
Housing,
for front mounting,
9 mm

21 41 000 0016



Circular connectors M8,
Housing,
for front mounting,
13 mm

21 41 000 0017





M8

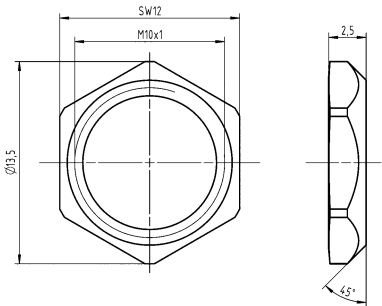
Identification

Circular connectors M8,
hexagonal nut,
M10 x 1

Part number
Female

21 41 000 0018


Drawing
(dimensions in mm)



Number of contacts

4

Wave soldering termination
Shielded



M8

Technical characteristics

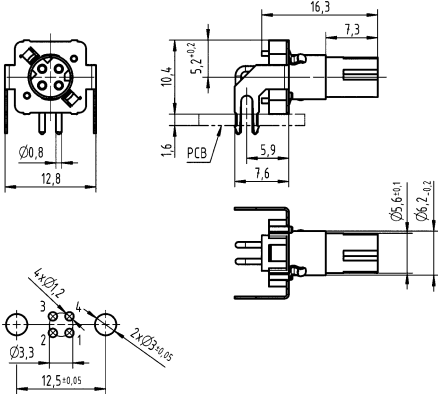
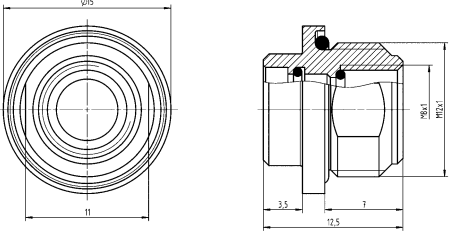
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP67, when mated

Technical characteristics

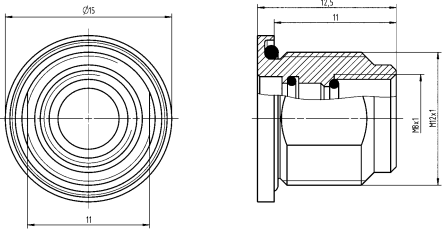
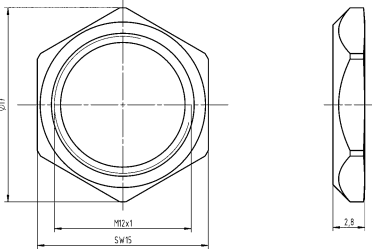
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-114

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, PCB connector, Angled, Wave soldering termination, Shielded  Order housings separately	21 42 010 0003 401	 PCB layout
Circular connectors M8, Housing, for rear mounting, 7 mm 	21 42 010 0004 401	


M8

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, Housing, for rear mounting, 11 mm	21 42 010 0002 401	
Circular connectors M8, hexagonal nut, M12 x 1	21 42 010 0001 401	

Number of contacts

4

Wave soldering termination
Shielded



M8

Technical characteristics

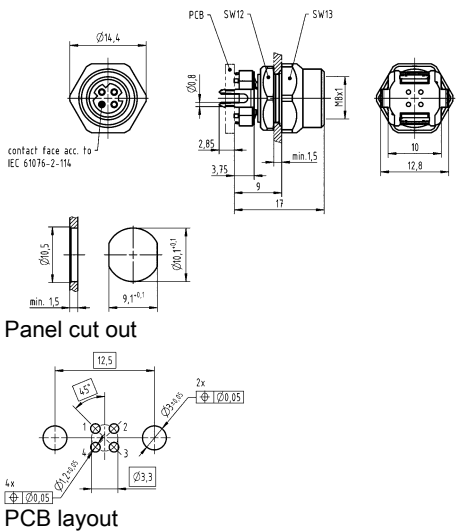
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP67

Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-114

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, 9 mm, PCB connector, Straight, for front mounting, Wave soldering termination, Shielded 	21 42 000 0014	 Panel cut out PCB layout



M8

Identification

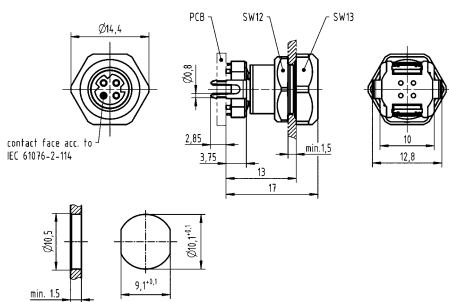
Circular connectors M8,
13 mm,
PCB connector,
Straight,
for front mounting,
Wave soldering termination,
Shielded




Part number
Female

21 42 000 0005

Drawing
(dimensions in mm)



Panel cut out



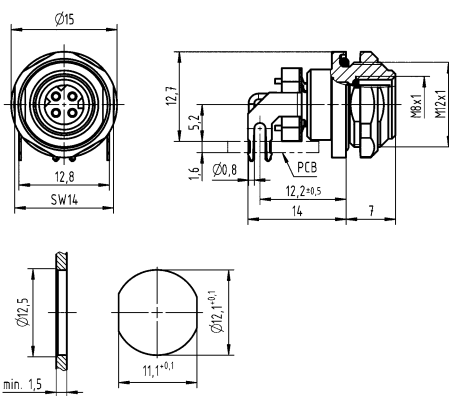
PCB layout




Circular connectors M8,
7 mm,
PCB connector,
Angled,
for rear mounting,
Wave soldering termination,
Shielded



21 42 000 0020

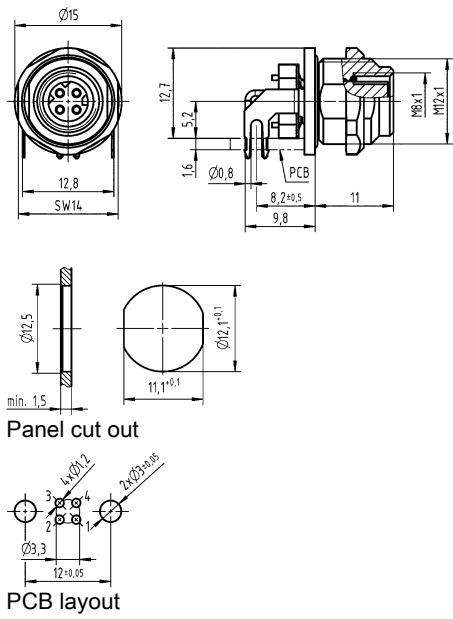


Panel cut out



PCB layout




Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, 11 mm, PCB connector, Angled, for rear mounting, Wave soldering termination, Shielded 	21 42 000 0019	

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

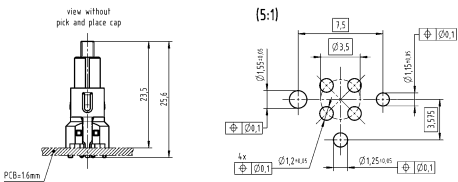
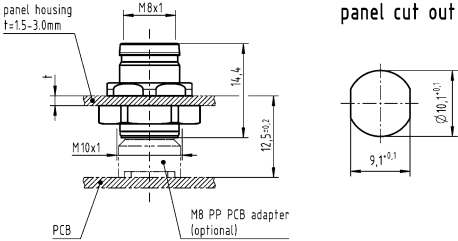
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated

Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-114

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, PCB connector, Reflow soldering termination (THR), Shielded, Pack contents: 50 pieces in a tray 	21 02 341 2418	
Order housings separately Circular connectors M8, PCB connector, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 25 pieces in a carton box 	21 02 341 2419	
Order housings separately Circular connectors M8, Housing, for front mounting, Pack contents: incl. lock nut 	21 02 301 2001	


Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, Housing, for front mounting, Pack contents: without lock nut	21 02 301 2002	
Lock nut, M10 x 1	21 01 000 0051	

M8

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz

Technical characteristics

Tightening torque	1 Nm Lock nut
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals


IEC 61076-2-114

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, PCB connector, Straight, for front mounting, Reflow soldering termination (THR), Shielded, Pack contents: incl. housing 	21 02 341 2431	

Number of contacts

3

Unshielded



M8

Technical characteristics

Number of contacts	3
Rated current	3 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.25 mm ²
Conductor cross-section	AWG 24
Tightening torque	0.8 Nm Lock nut

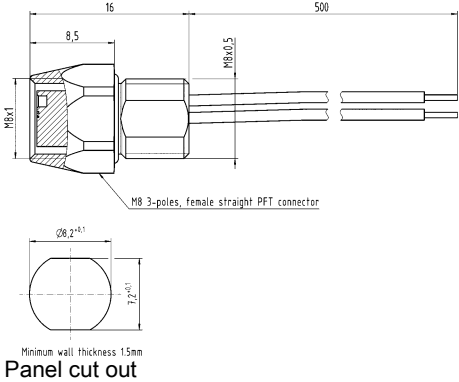
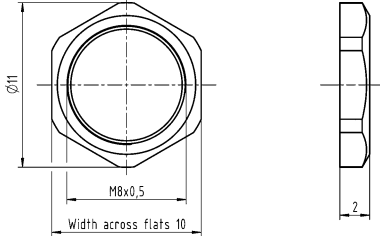
Technical characteristics

Material (insert)	Thermoplastic polyurethane (TPU)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption, compliant

Specifications and approvals

IEC 61076-2-104




Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, Panel feed through, With conductors, for front mounting, Unshielded 	0.25	21 02 357 6305	 Panel cut out
Circular connectors M8, hexagonal nut, M8 x 0.5 		21 01 000 0048	



Number of contacts

4

Unshielded



Technical characteristics

Number of contacts	4
Rated current	3 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.25 mm ²
Conductor cross-section	AWG 24
Tightening torque	0.8 Nm Lock nut

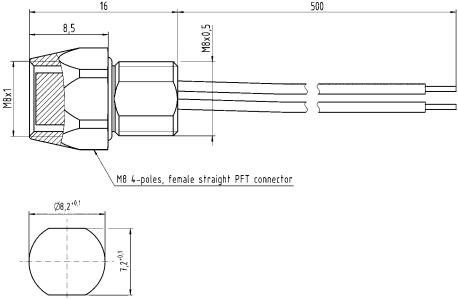
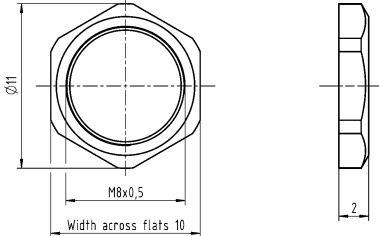
Technical characteristics

Material (insert)	Thermoplastic polyurethane (TPU)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption, compliant

Specifications and approvals

IEC 61076-2-104



Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M8, Panel feed through, With conductors, for front mounting, Unshielded 	0.25	21 02 357 6405	 M8 4-poles, female straight PFT connector Minimum wall thickness 1.5mm Panel cut out
Hexagonal connectors M8, hexagonal nut, M8 x 0.5 		21 01 000 0048	


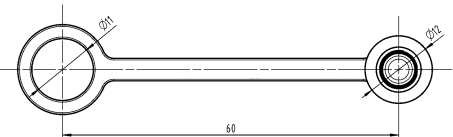
M8

Technical characteristics

Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black
RoHS compliant

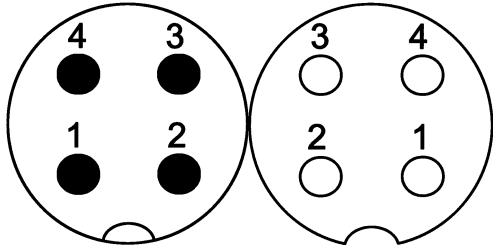
Identification	Part number	Drawing (dimensions in mm)
Circular connectors M8, Cap, for male inserts, with cord	21 41 000 0003	
Circular connectors M8, Cap, for female inserts, with cord	21 41 000 0004	

Contents	Page
PCB connectors.....	D03 12.2
PCB connectors with transformer.....	D03 12.71
Panel feed through	D03 12.83
Accessories	D03 12.100

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

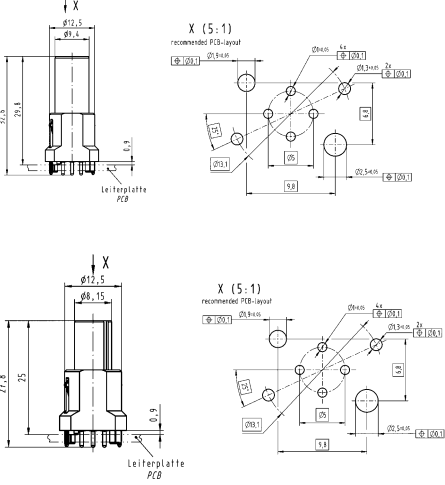
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption, compliant

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray 	21 03 321 1418	21 03 321 2418	
Order housings separately			

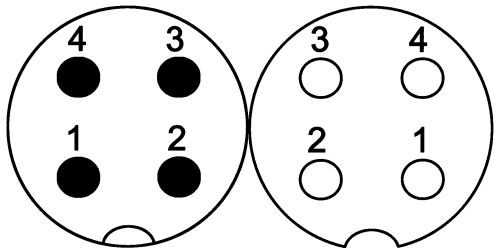
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 10 pieces	21 03 301 1000	21 03 301 2000	
Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 10 pieces	21 03 301 1003	21 03 301 2003	

M12

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

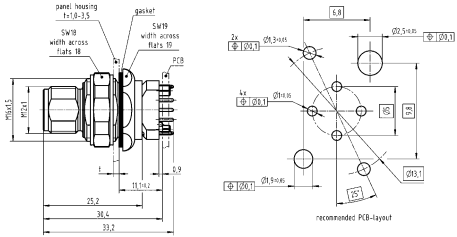
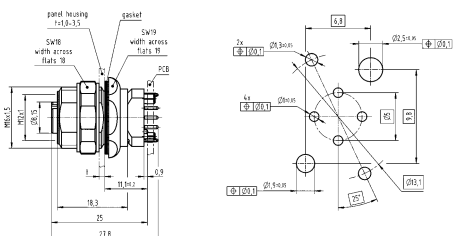
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut







Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

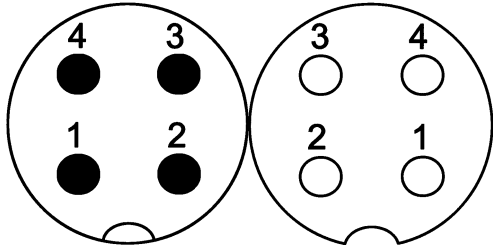
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 321 1430	21 03 321 2430	 Panel cut out  Panel cut out

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 321 1431	21 03 321 2431	  Panel cut out   Panel cut out  

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics





Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP20, IP67, when mated

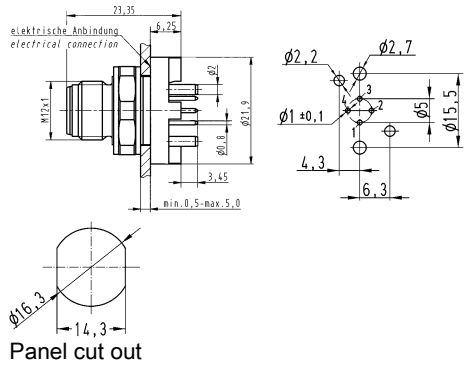
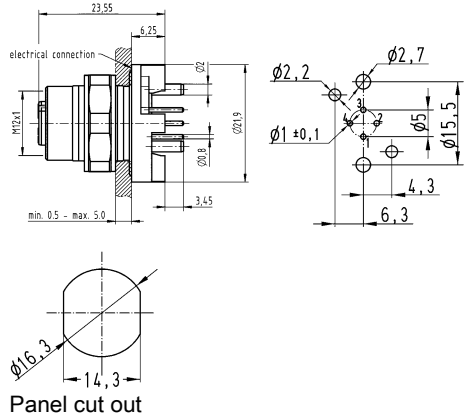
Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

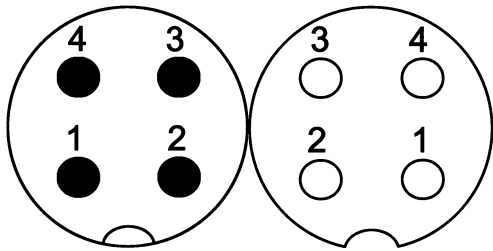
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP20 	21 03 321 1410	21 03 321 6410	  Panel cut out   Panel cut out

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 	21 03 321 1420	21 03 321 6420	 

Number of contacts

4

Reflow soldering termination (SMT)
Unshielded



Technical characteristics

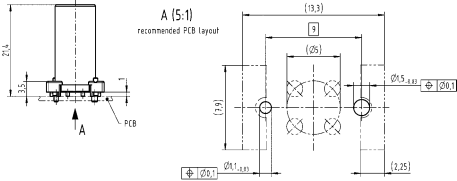
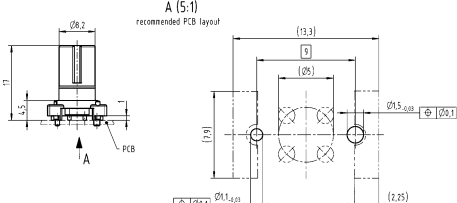
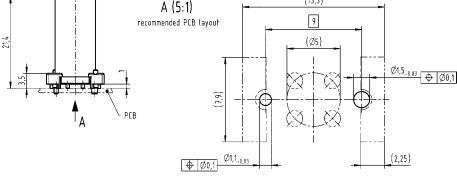
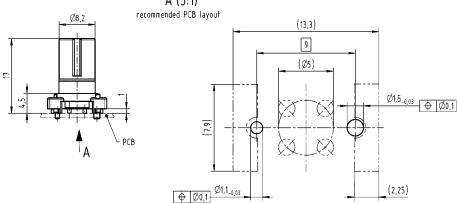
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated

Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

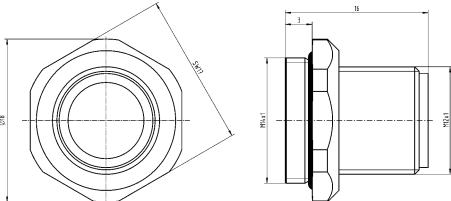
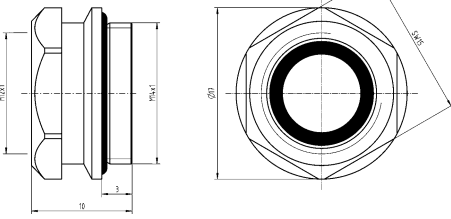
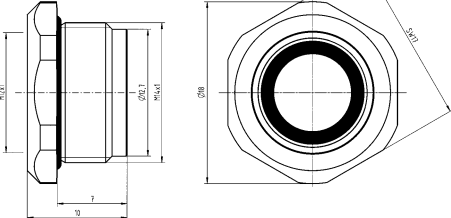
Specifications and approvals

IEC 61076-2-101

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded 	21 03 311 1415	21 03 311 2410	 
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded, Pack contents: 75 pieces on reel 	21 03 311 1416	21 03 311 2411	 

Order housings separately

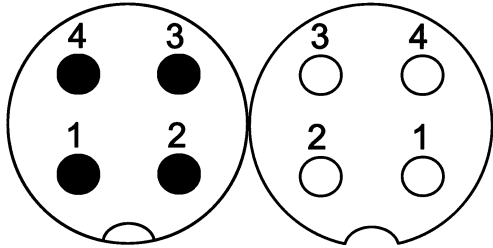
Order housings separately

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm  If necessary, order lock nut 21 41 000 0011 separately.	21 41 000 0012	21 41 000 0010	 
Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm  If necessary, order lock nut 21 41 000 0011 separately.		21 41 000 0013	

Number of contacts

4

Wave soldering termination
Shielded



Technical characteristics

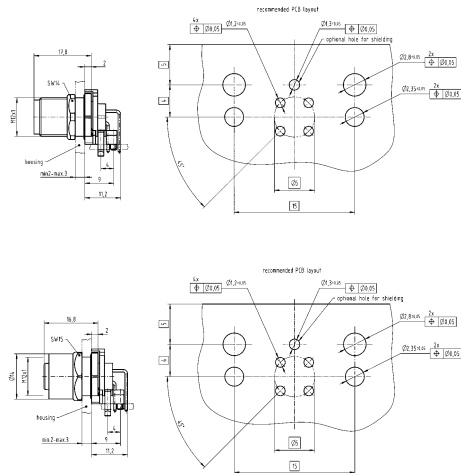
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when screwed
Tightening torque	1 Nm Lock nut

Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Angled, for rear mounting, Wave soldering termination, Shielded 	21 03 321 3401	21 03 321 4401	

5

D03
12
.
11



M12

Identification

Part number
Male Female

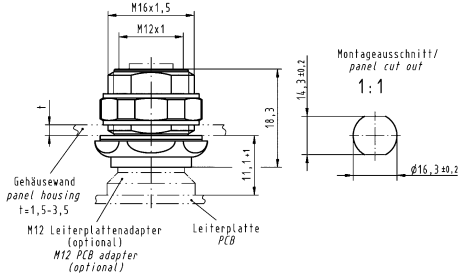
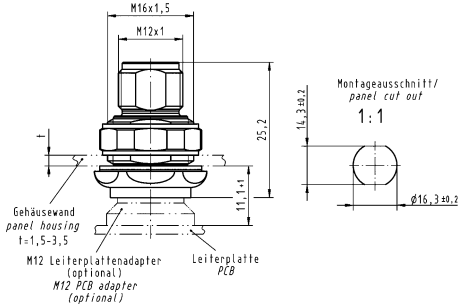
Drawing
(dimensions in mm)

Circular connectors M12,
Housing,
for rear mounting,
Pack contents:
10 pieces



21 03 301 1000

21 03 301 2000

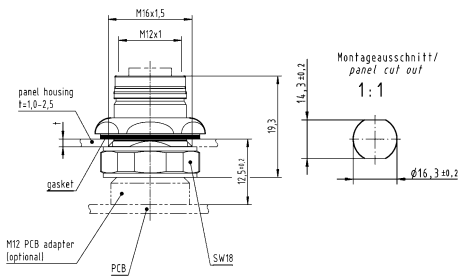
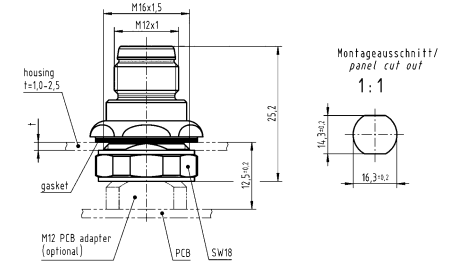


Circular connectors M12,
PushPull,
Housing,
for front mounting,
Pack contents:
10 pieces



21 03 301 1003

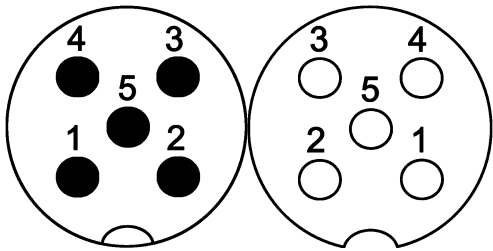
21 03 301 2003



Number of contacts

5

Reflow soldering termination (THR)
Shielded



M12

Technical characteristics





Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded	21 03 321 1530	21 03 321 2530	  Panel cut out
			  Panel cut out

D03
12
13

M12



Circular connectors M12,
PushPull,
PCB adapter,
Straight,
incl. housing,
for front mounting,
Reflow soldering termination (THR),
Shielded





Part number

Male Female

Drawing
(dimensions in mm)



Panel cut out

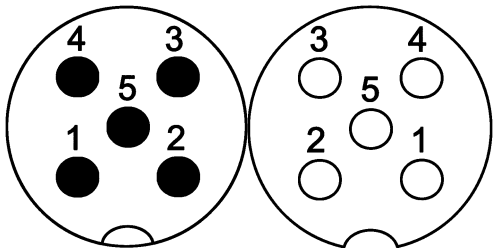


Panel cut out

Number of contacts

5

Reflow soldering termination (THR)
Shielded



M12

Technical characteristics





Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP20, IP67, when mated

Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP20 	21 03 321 1510	21 03 321 6510	  Panel cut out   Panel cut out

M12

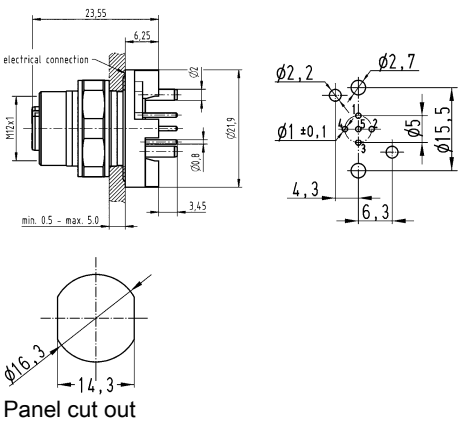
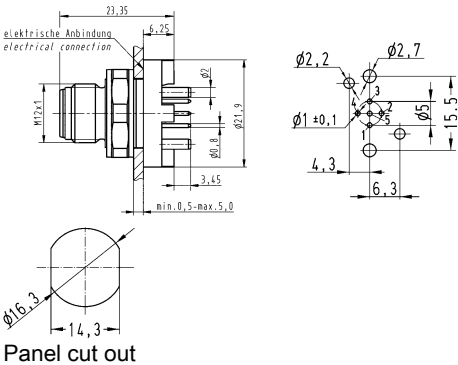
Circular connectors M12,
PCB adapter,
Straight,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP67



Part number
Male Female

21 03 321 1520 21 03 321 6520

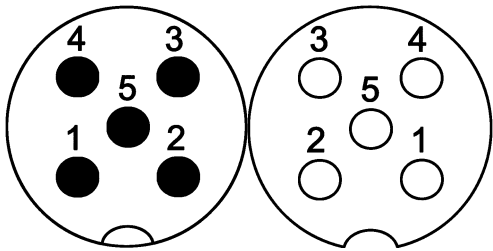
Drawing
(dimensions in mm)



Number of contacts

5

Reflow soldering termination (SMT)
Unshielded



M12

Technical characteristics

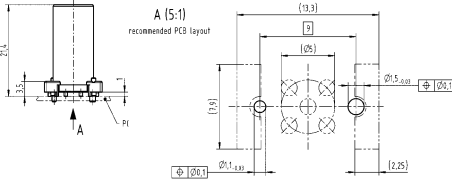
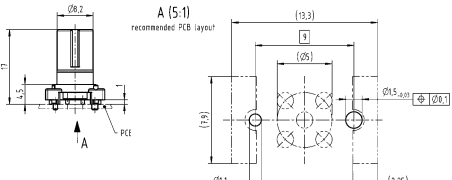
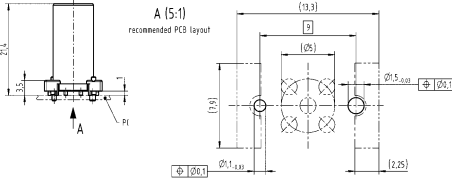
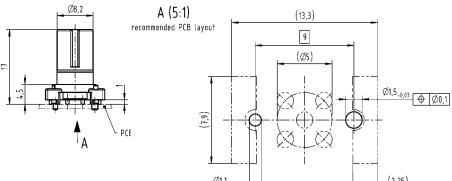
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated

Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded 	21 03 311 1515	21 03 311 2510	 
Order housings separately			
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded, Pack contents: 75 pieces on reel 	21 03 311 1516	21 03 311 2511	 
Order housings separately			



M12

Identification

Part number
Male Female

Drawing
(dimensions in mm)

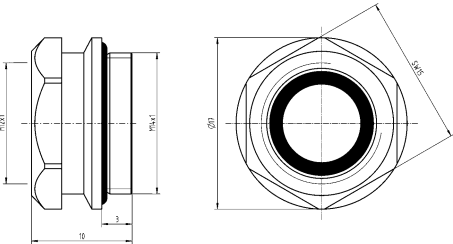
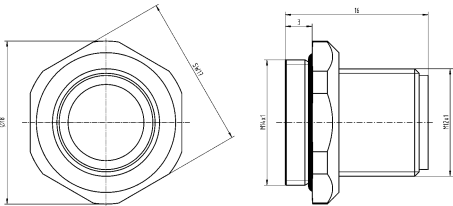
Circular connectors M12,
Housing,
for front mounting,
M14 x 1,
9 mm



If necessary, order lock nut 21 41 000 0011
separately.

21 41 000 0012

21 41 000 0010

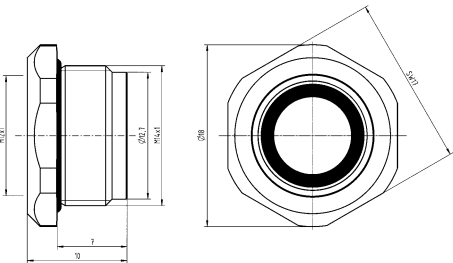


Circular connectors M12,
Housing,
for front mounting,
M14 x 1,
13 mm



If necessary, order lock nut 21 41 000 0011
separately.

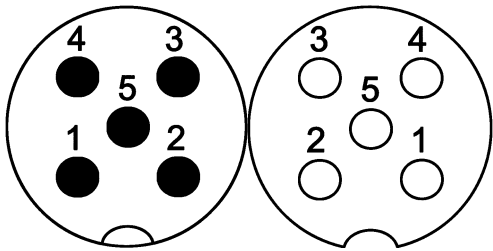
21 41 000 0013



Number of contacts

5

Wave soldering termination
Shielded



M12

Technical characteristics

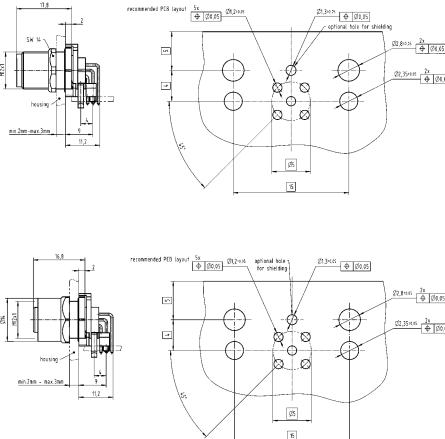
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Tightening torque	1 Nm Lock nut

Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

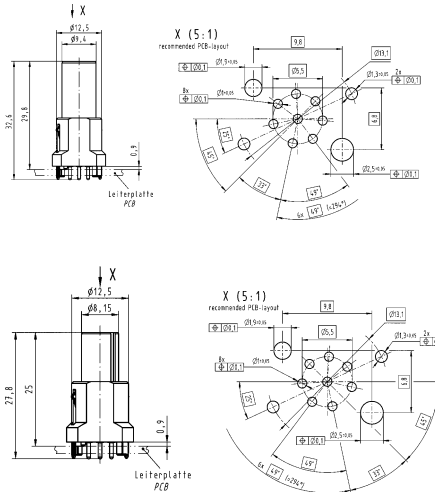
IEC 61076-2-101

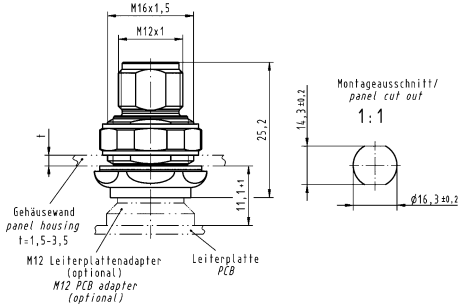
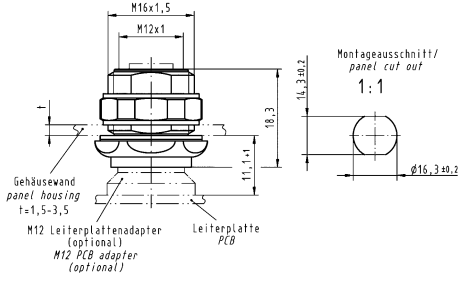
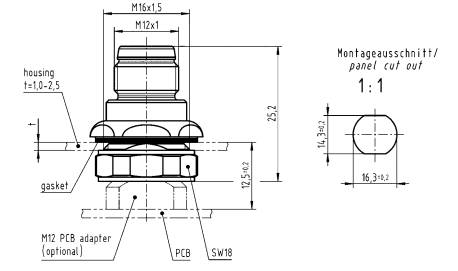
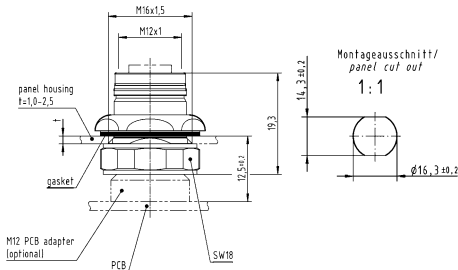
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Angled, for rear mounting, Wave soldering termination, Shielded 	21 03 321 3501	21 03 321 4501	

8

Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	21 03 321 1818	21 03 321 2818	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 10 pieces 	21 03 301 1000	21 03 301 2000	 
Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 10 pieces 	21 03 301 1003	21 03 301 2003	 

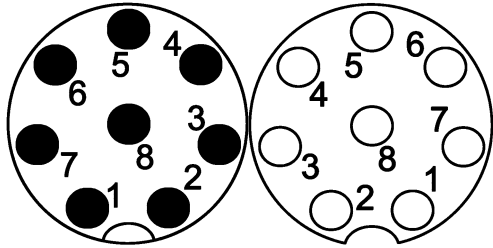
M12

D03
12
21

Number of contacts

8

Reflow soldering termination (THR)
Shielded



Technical characteristics

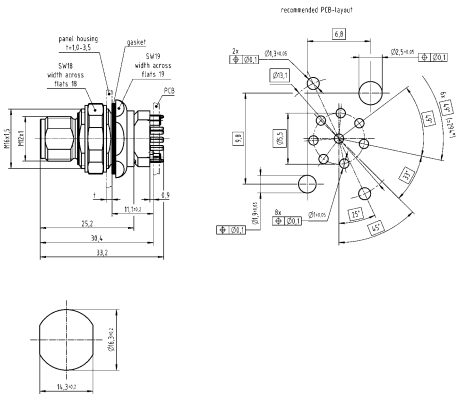
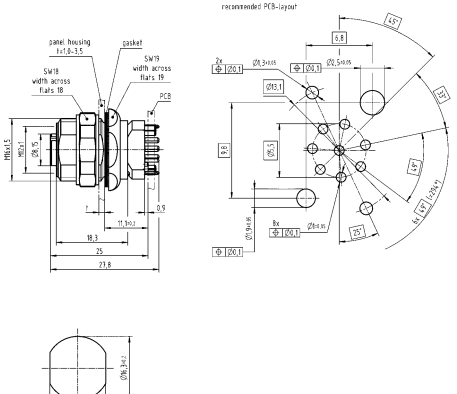
Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

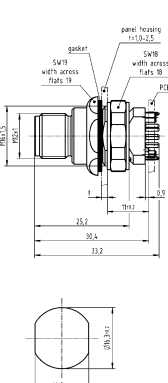
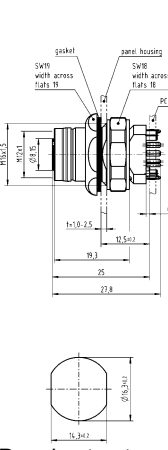


Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

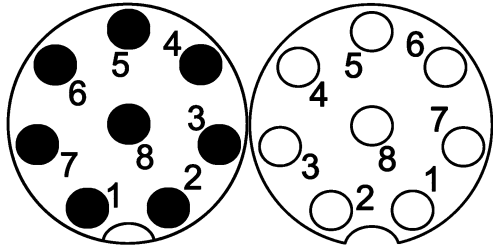
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 321 1830	21 03 321 2830	recommended PCB-layout  Panel cut out  Panel cut out

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 321 1831	21 03 321 2831	 Panel cut out  Panel cut out  

Number of contacts

8

Reflow soldering termination (SMT)
Unshielded



Technical characteristics

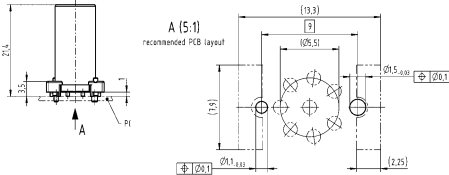
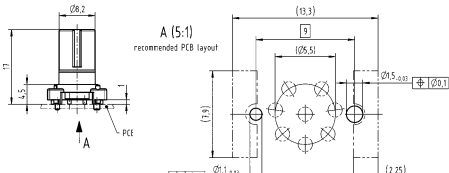
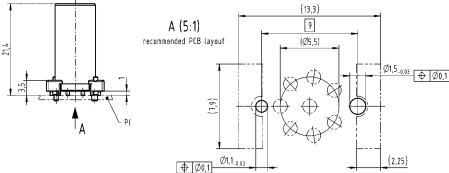
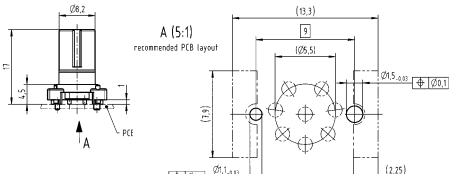
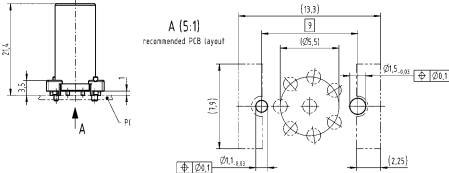
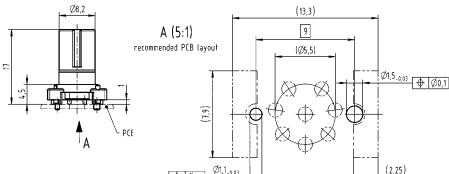
Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated

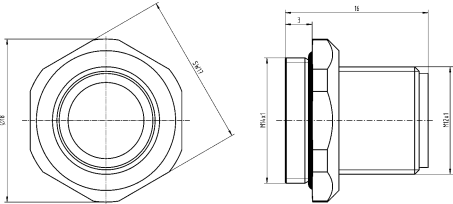
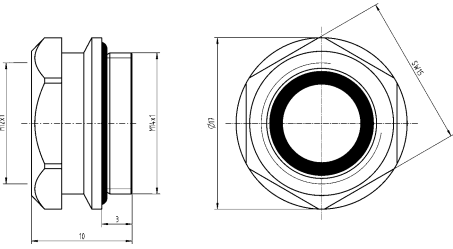
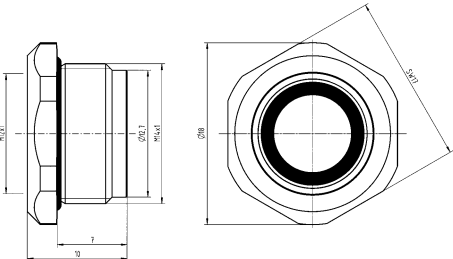
Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

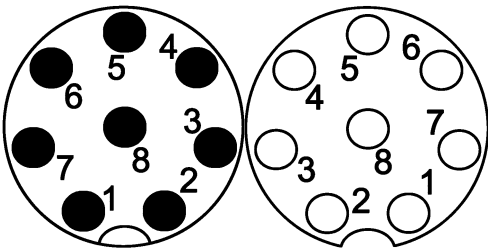
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded 	21 03 311 1815	21 03 311 2810	   
Order housings separately			
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded, Pack contents: 75 pieces on reel 	21 03 311 1816	21 03 311 2811	 
Order housings separately			

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm  If necessary, order lock nut 21 41 000 0011 separately.	21 41 000 0012	21 41 000 0010	 
Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm  If necessary, order lock nut 21 41 000 0011 separately.		21 41 000 0013	

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



Technical characteristics

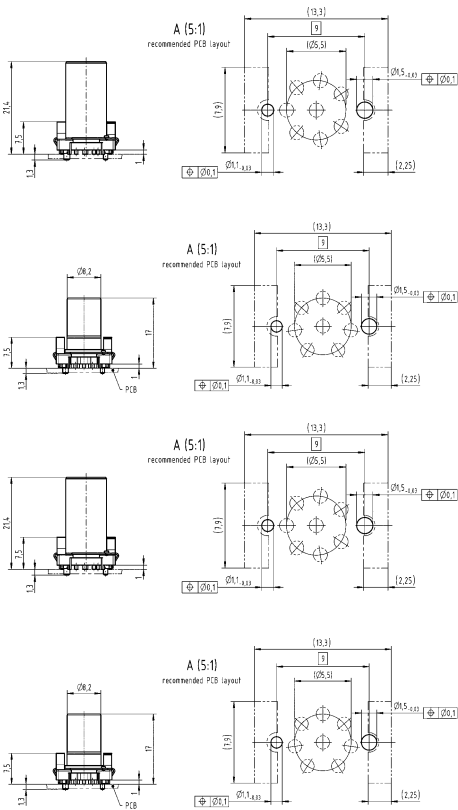
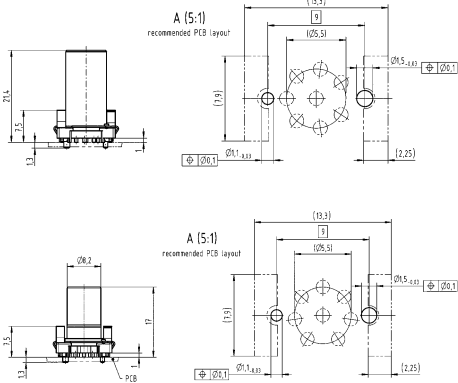
Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated

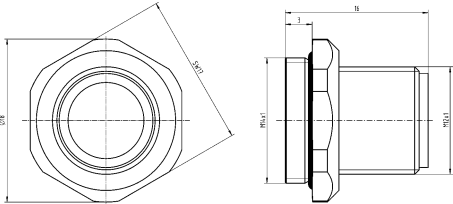
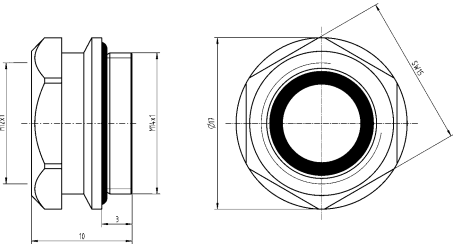
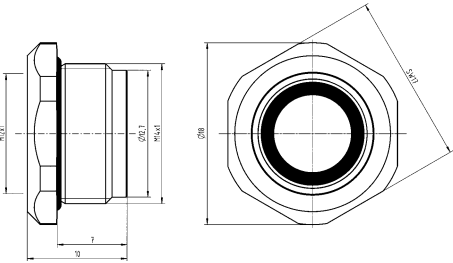
Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

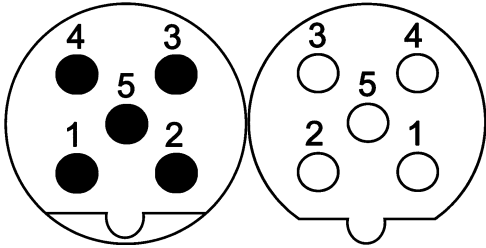
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded 	21 03 321 1802	21 03 321 2802	
Order housings separately			
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 75 pieces on reel 	21 03 321 1803	21 03 321 2803	
Order housings separately			

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm  If necessary, order lock nut 21 41 000 0011 separately.	21 41 000 0012	21 41 000 0010	 
Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm  If necessary, order lock nut 21 41 000 0011 separately.		21 41 000 0013	

Number of contacts

5

Reflow soldering termination (THR)
Shielded



Technical characteristics

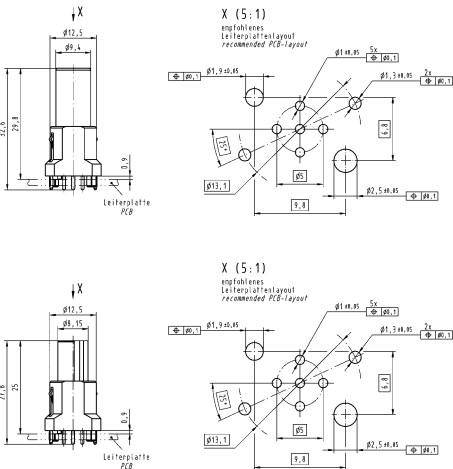
Number of contacts	5
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption, compliant

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	21 03 341 1518	21 03 341 2518	

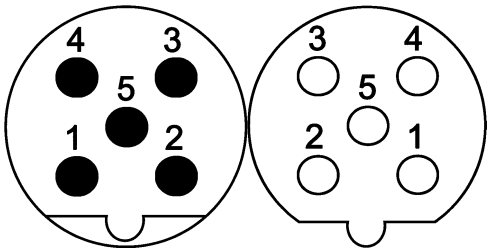
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 10 pieces	21 03 301 1000	21 03 301 2000	
Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 10 pieces	21 03 301 1003	21 03 301 2003	

M12

Number of contacts

5

Reflow soldering termination (THR)
Shielded



Technical characteristics

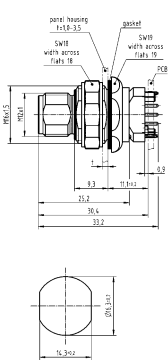
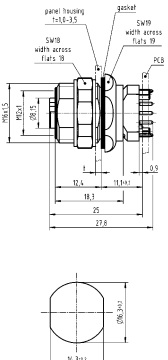
Number of contacts	5
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut

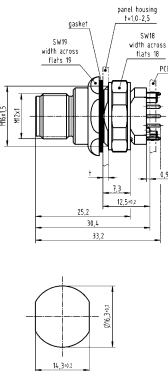
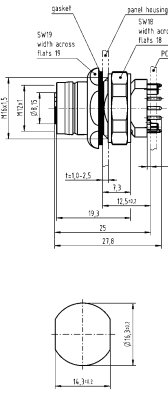


Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

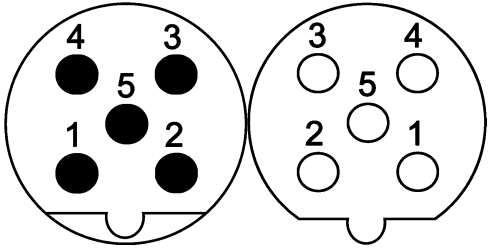
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 341 1530	21 03 341 2530	 Panel cut out  Panel cut out

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 341 1531	21 03 341 2531	 Panel cut out  Panel cut out  

Number of contacts

5

Reflow soldering termination (THR)
Shielded



Technical characteristics







Number of contacts	5
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated

Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 	21 03 341 1505	21 03 341 2505	   Panel cut out    Panel cut out



M12

Identification

Part number
Male Female

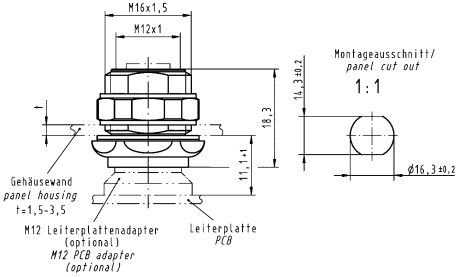
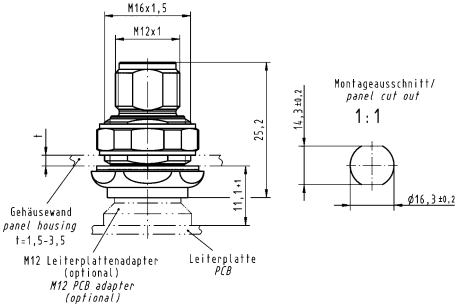
Drawing
(dimensions in mm)

Circular connectors M12,
Housing,
for rear mounting,
Pack contents:
10 pieces



21 03 301 1000

21 03 301 2000

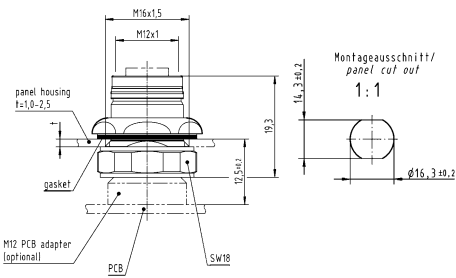
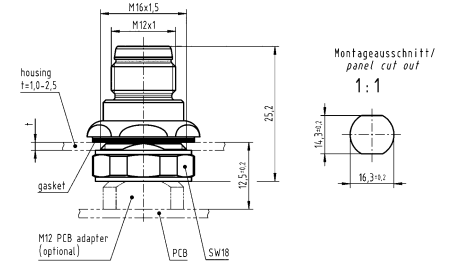


Circular connectors M12,
PushPull,
Housing,
for front mounting,
Pack contents:
10 pieces



21 03 301 1003

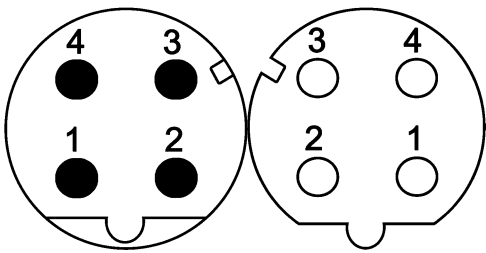
21 03 301 2003



Number of contacts

4

Reflow soldering termination (THR)
Shielded



M12

Technical characteristics

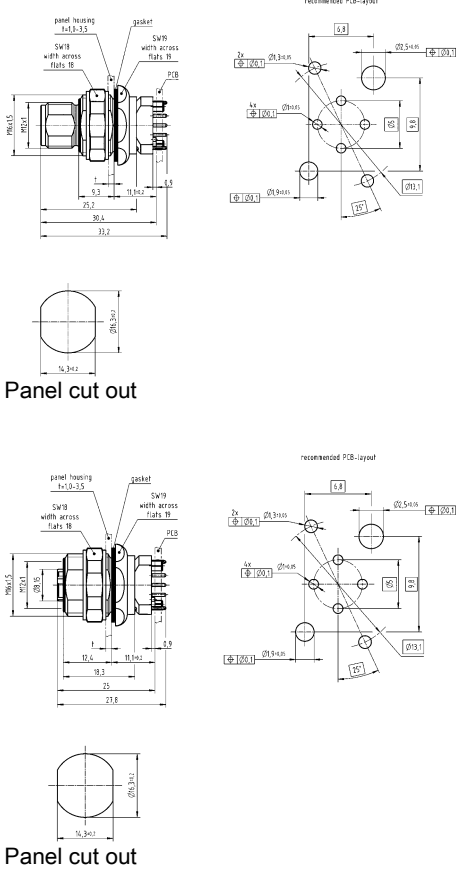
Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

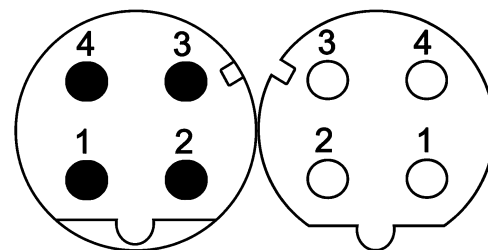
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 381 1430	21 03 381 2430	 Panel cut out Panel cut out

M12

Identification	Part number		Drawing (dimensions in mm)	
	Male	Female		
Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded	21 03 381 1431	21 03 381 2431	The technical drawing for the male connector includes three views: - A side cross-sectional view showing dimensions such as overall length (33.2), shell diameter (Ø9.5), and internal features like the gasket and SWB. - A circular panel cutout view showing an outer diameter of Ø9.5 and an inner diameter of Ø6.3. - A recommended PCB layout diagram showing the arrangement of four pins with dimensions for pin pitch (2x Ø1.25), pin diameter (Ø0.7), and mounting hole placement.	The technical drawing for the female connector includes three views: - A side cross-sectional view showing dimensions such as overall length (27.8), shell diameter (Ø9.5), and internal features like the gasket and SWB. - A circular panel cutout view showing an outer diameter of Ø9.5 and an inner diameter of Ø6.3. - A recommended PCB layout diagram showing the arrangement of four pins with dimensions for pin pitch (2x Ø1.25), pin diameter (Ø0.7), and mounting hole placement.

Number of contacts

4

 Reflow soldering termination (THR)
 Shielded


M12

Technical characteristics

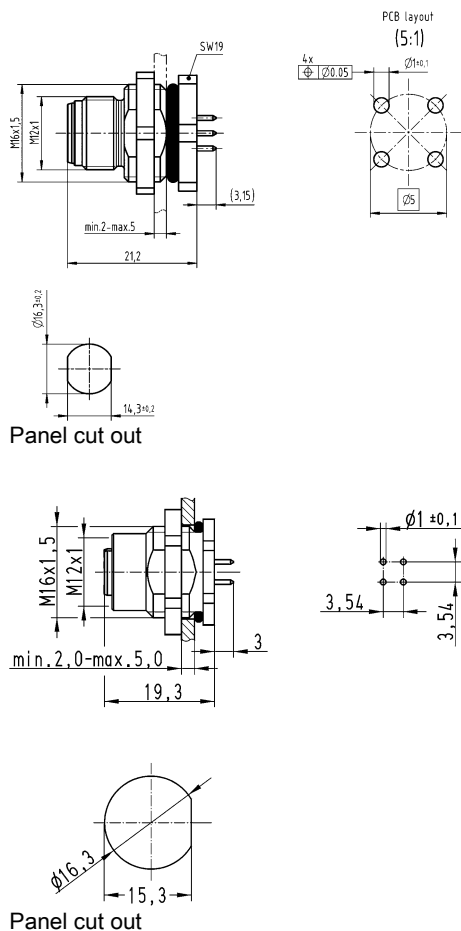
Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated, IP20
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

Technical characteristics

Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

 IEC 61076-2-101
 UL 1977 ECBT2.E235076
 CSA-C22.2 No. 182.3 ECBT8.E235076


Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67	21 03 371 1400	21 03 371 2415	

 D03
 12
 37



M12

Identification

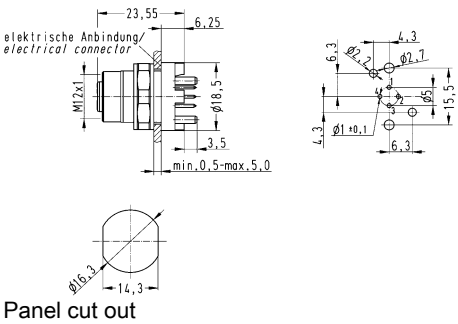
Part number
Male Female

Drawing
(dimensions in mm)

Circular connectors M12,
With fixing hole,
PCB adapter,
Straight,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP20



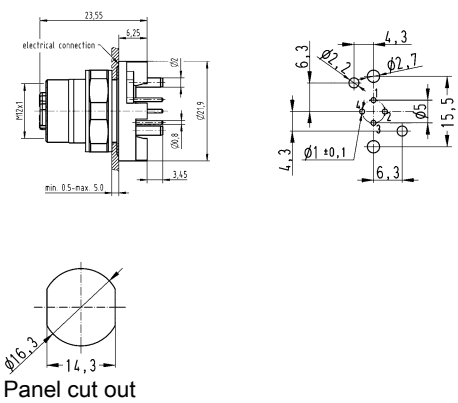
21 03 381 6410



Circular connectors M12,
With fixing hole,
PCB adapter,
Straight,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP67



21 03 381 6420



4

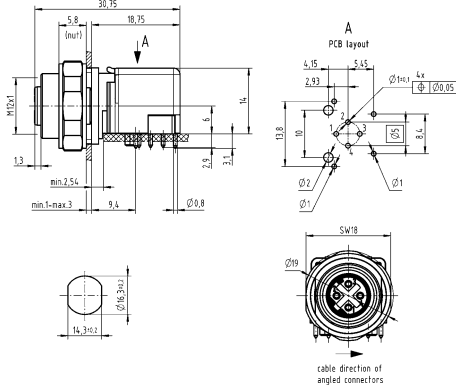
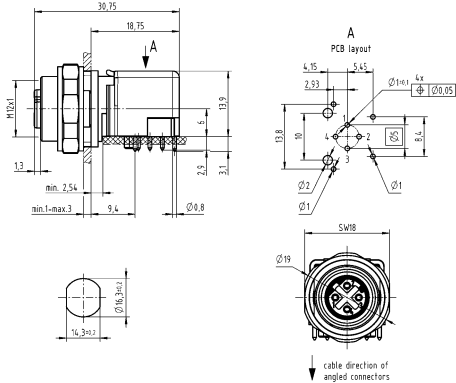
M12

Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP20, IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)

Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

IEC 61076-2-101
UL 1977 ECBT2.E235076
CSA-C22.2 No. 182.3 ECBT8.E235076



Identification	Part number	Drawing
	Female	(dimensions in mm)
Circular connectors M12, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP20  Coding bottom left = Cable entry direction on the angled connector: to the right	21 03 381 4410	 Panel cut out
Circular connectors M12, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP20  Coding top left = Cable entry direction on the angled connector: downwards	21 03 381 4411	 Panel cut out

D03
12
.
39

M12

Identification

Circular connectors M12,
With fixing hole,
PCB adapter,
Angled,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP20

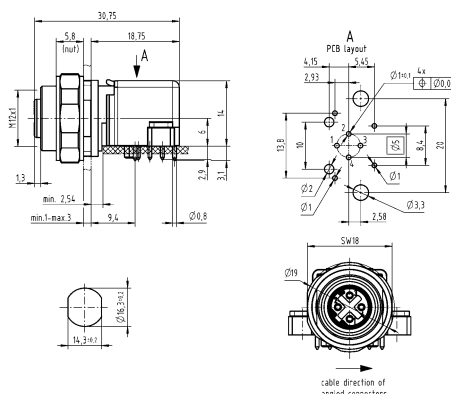


Coding bottom left = Cable entry direction on the angled connector: to the right

Part number Female

21 03 381 4412

Drawing (dimensions in mm)



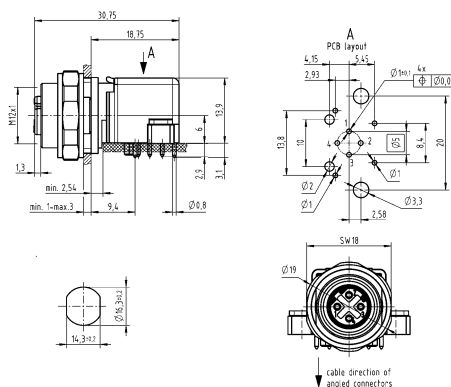
Panel cut out

Circular connectors M12,
With fixing hole,
PCB adapter,
Angled,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP20



Coding top left = Cable entry direction on the angled connector: downwards

21 03 381 4413



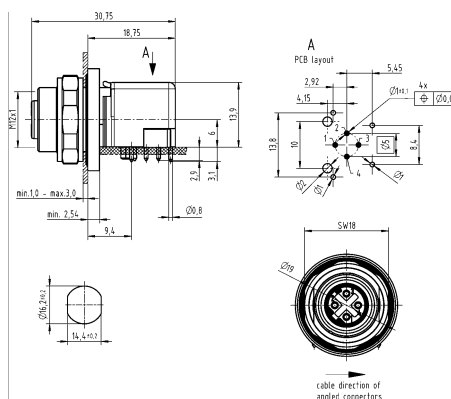
Panel cut out

Circular connectors M12,
PCB adapter,
Angled,
for rear mounting,
Reflow soldering termination (THR),
Shielded,
IP67

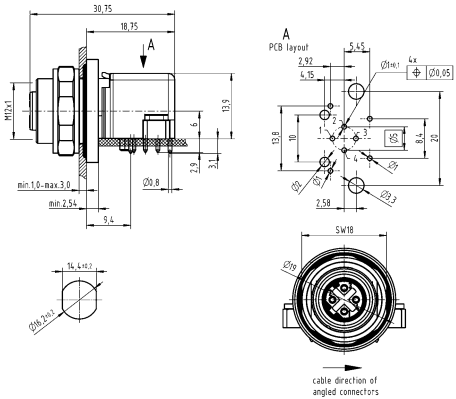


Coding bottom left = Cable entry direction on the angled connector: to the right

21 03 381 4430

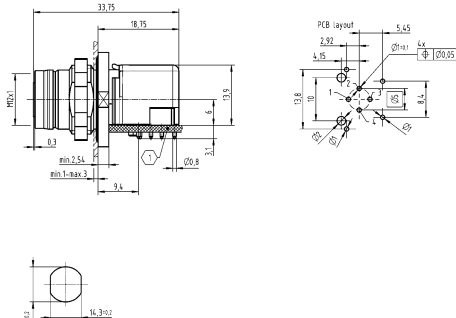
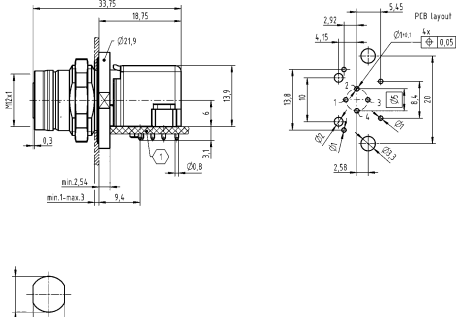


Panel cut out

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67  Coding bottom left = Cable entry direction on the angled connector: to the right	21 03 381 4432	 Panel cut out

4


**D03
12
.
42**

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PushPull, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 	21 03 381 4436	 Panel cut out
Circular connectors M12, PushPull, With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 	21 03 381 4437	 Panel cut out

Number of contacts

4

Reflow soldering termination (SMT)
Shielded



Technical characteristics

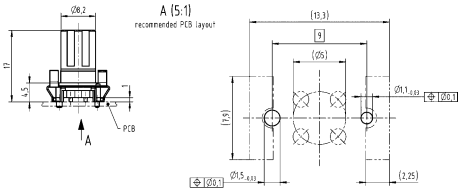
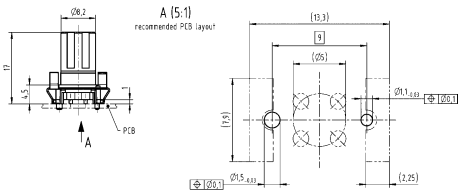
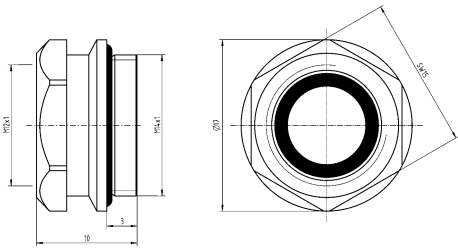
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz

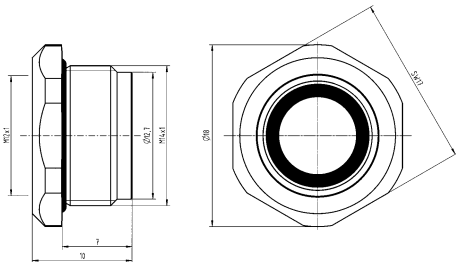
Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101


Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded 	21 03 381 2404	
Order housings separately Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 75 pieces on reel 	21 03 381 2405	
Order housings separately Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm 	21 41 000 0010	
If necessary, order lock nut 21 41 000 0011 separately.		

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm  If necessary, order lock nut 21 41 000 0011 separately.	21 41 000 0013	

Number of contacts

4

Wave soldering termination
Shielded



Technical characteristics

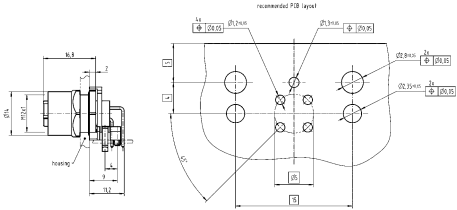
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	1 Nm Lock nut

Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption


Specifications and approvals

IEC 61076-2-101

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Angled, for rear mounting, Wave soldering termination, Shielded 	21 03 381 4440	 Panel cut out 

Number of contacts

8

 Reflow soldering termination (THR)
 Shielded


M12

Technical characteristics

Number of contacts	8
Rated current	0.5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A ₁ , Class E _A up to 500 MHz, Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption, compliant

Specifications and approvals

 IEC 61076-2-109
 UL 1977 ECBT2.E102079
 CSA-C22.2 No. 182.3 ECBT8.E102079


Identification

 Part number
 Female

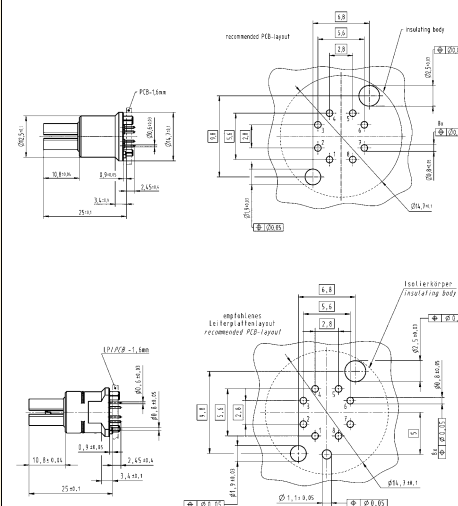
 Drawing
 (dimensions in mm)

 Circular connectors M12,
 PCB adapter,
 Straight,
 Reflow soldering termination (THR),
 Shielded,

 Pack contents:
 60 pieces in a tray


Order housings separately

 Cat. 5
 Cat. 6A

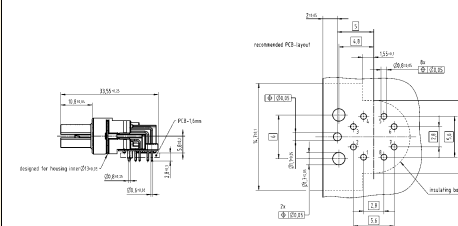
 21 03 381 2807
 21 03 381 2806

 Circular connectors M12,
 PCB adapter,
 Angled,
 Reflow soldering termination (THR),
 Shielded,

 Pack contents:
 30 pieces in a tray


Order housings separately

Cat. 6A


21 03 381 4806



Number of contacts

8

Reflow soldering termination (THR)
Shielded



M12

Technical characteristics

Number of contacts	8
Rated current	0.5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz, Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)

Technical characteristics

Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

[illegible]

D03
12
.
49

M12

Identification

Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded

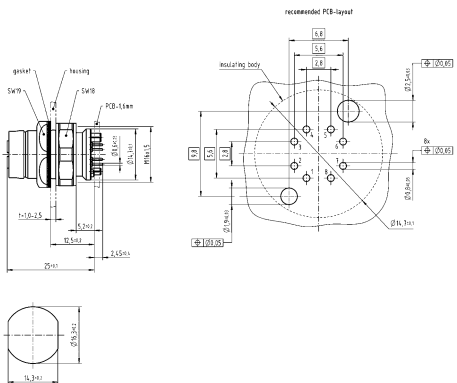


Cat. 5
Cat. 6A

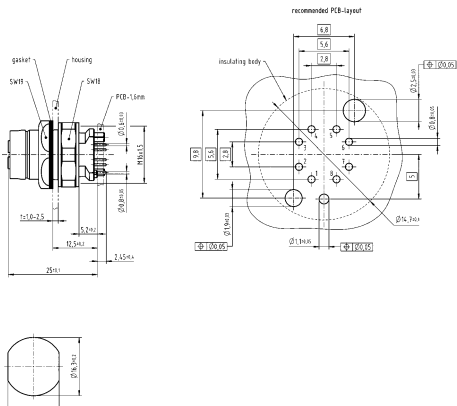
Part number
Female

21 03 381 2814
21 03 381 2813

Drawing
(dimensions in mm)



Panel cut out



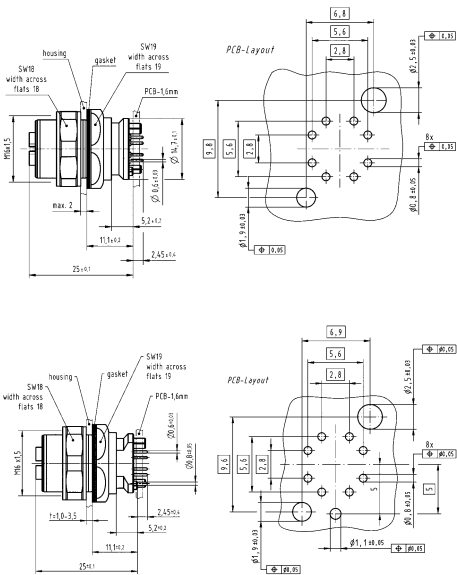
Panel cut out

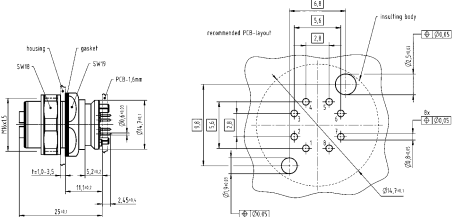
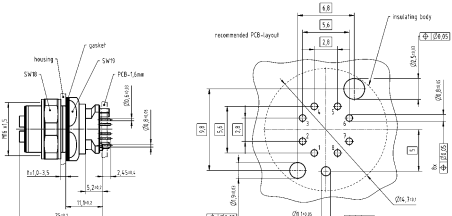
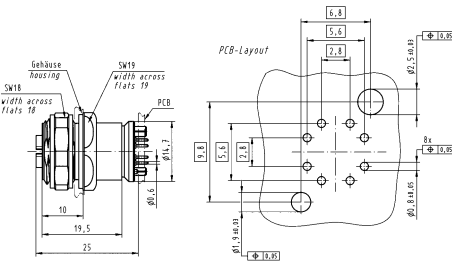
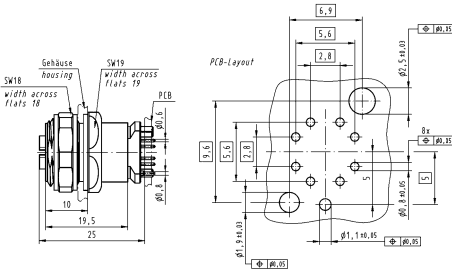
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray



Cat. 5
Cat. 6A

21 03 381 2809
21 03 381 2810




Identification		Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	Cat. 5 Cat. 6A	21 03 381 2812 21 03 381 2811	 Panel cut out  Panel cut out
Circular connectors M12, Long version, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray 	Cat. 5 Cat. 6A	21 03 381 2805 21 03 381 2804	 Panel cut out  Panel cut out

Number of contacts

8

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	8
Rated current	0.5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)

Technical characteristics

Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079



Identification

Part number
Female


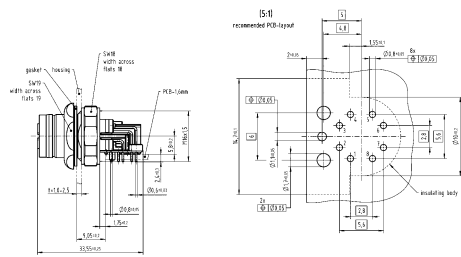
Drawing
(dimensions in mm)

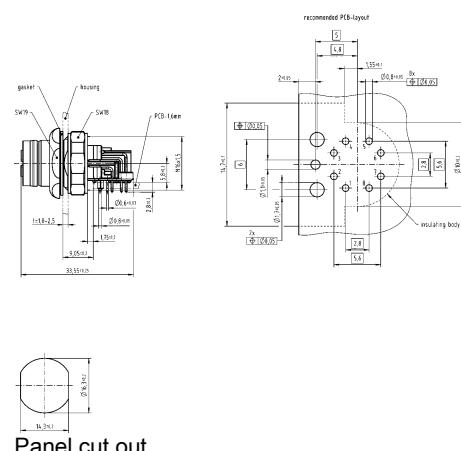
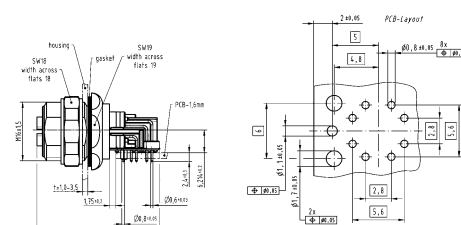
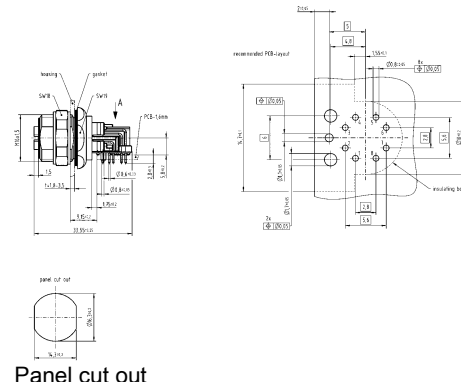
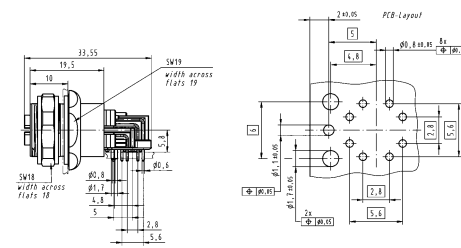
Circular connectors M12,
PushPull,
PCB adapter,
Angled,
incl. housing,
for front mounting,
Reflow soldering termination (THR),
Shielded,

Pack contents:
30 pieces in a tray



21 03 381 4802



Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PushPull, PCB adapter, Angled, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded	21 03 381 4810	 Panel cut out
Circular connectors M12, PCB adapter, Angled, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a tray	21 03 381 4807	
Circular connectors M12, PCB adapter, Angled, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded	21 03 381 4809	 Panel cut out
Circular connectors M12, Long version, PCB adapter, Angled, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a tray	21 03 381 4804	


M12

 D03
 12
 -
 53

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



Technical characteristics

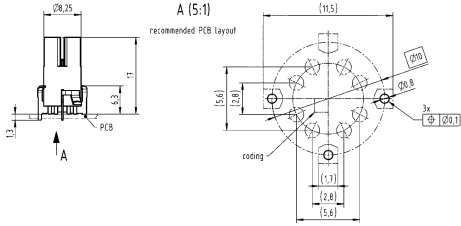
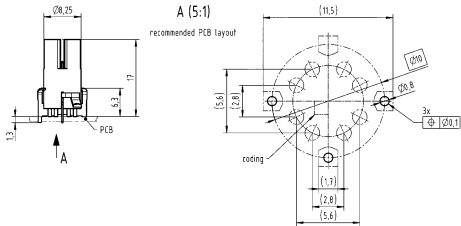
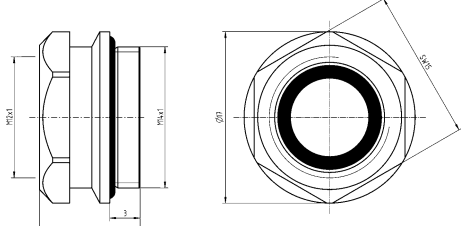
Number of contacts	8
Rated current	0.5 A
Rated voltage	48 V
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

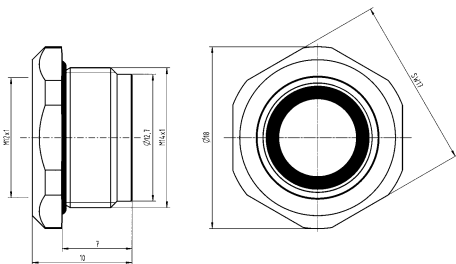
Technical characteristics

Tightening torque	1 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109

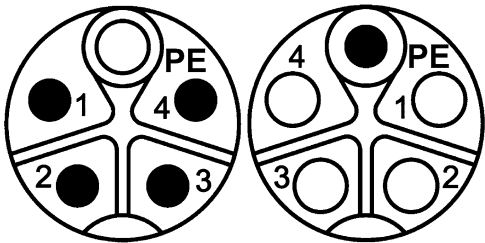
Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded 	21 03 381 2820	
Order housings separately Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 75 pieces on reel 	21 03 381 2821	
Order housings separately Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm 	21 41 000 0010	
If necessary, order lock nut 21 41 000 0011 separately.		

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm  If necessary, order lock nut 21 41 000 0011 separately.	21 41 000 0013	

Number of contacts

4+ 

Reflow soldering termination (THR)
Shielded



Technical characteristics





Number of contacts	4
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated

Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-111

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a carton box  Order housings separately	21 03 309 1505 407	21 03 309 2505 407	 
Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	21 03 309 1505	21 03 309 2505	 

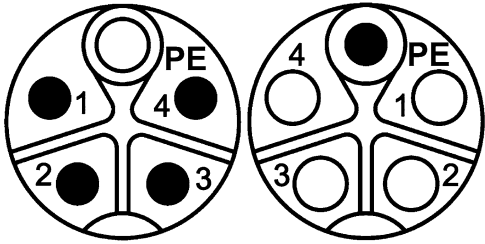
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces	21 03 302 1000 407	21 03 302 2000 407	
Circular connectors M12, Housing, for front mounting, Pack contents: 30 pieces	21 03 302 1001 407	21 03 302 2001 407	



Number of contacts

4+ 

Reflow soldering termination (THR)
Shielded



Technical characteristics



Number of contacts	4
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated

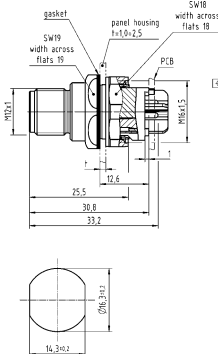
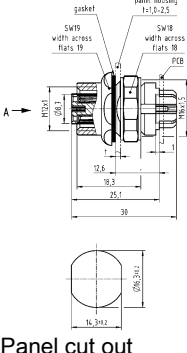


Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-111

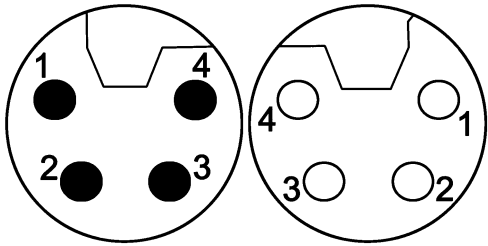
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 309 1530	21 03 309 2530	 Panel cut out  Panel cut out

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 309 1531	21 03 309 2531	 Panel cut out  Panel cut out  recommended PCB-layout A (5:1)  recommended PCB-layout A (5:1)

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

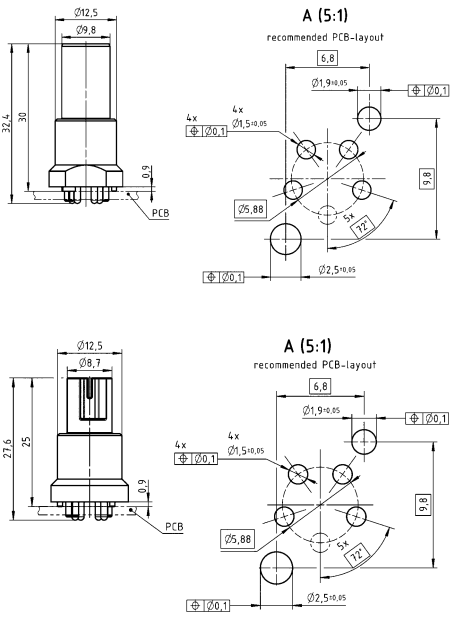
Technical characteristics

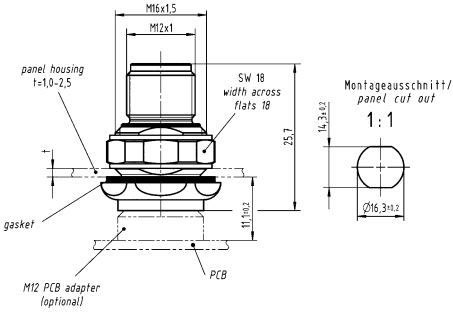
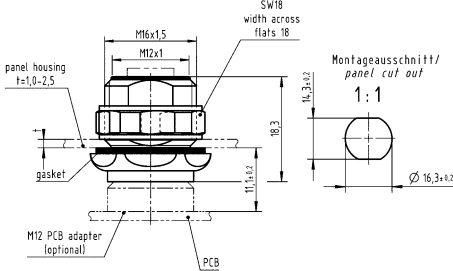
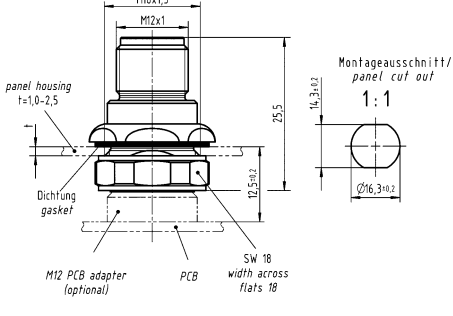
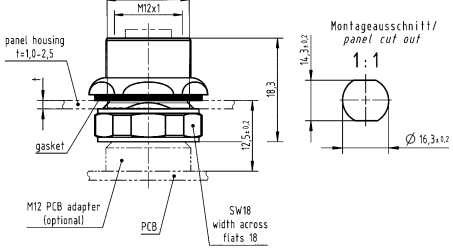
Colour (insert)	Black
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-111



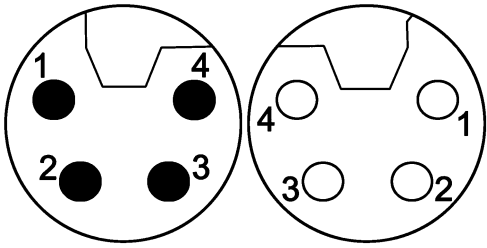
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	21 03 396 1506	21 03 396 2506	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 60 pieces 	21 03 302 1000	21 03 302 2000	 
Circular connectors M12, Housing, for front mounting, Pack contents: 60 pieces 	21 03 302 1001	21 03 302 2001	 

Number of contacts

4

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

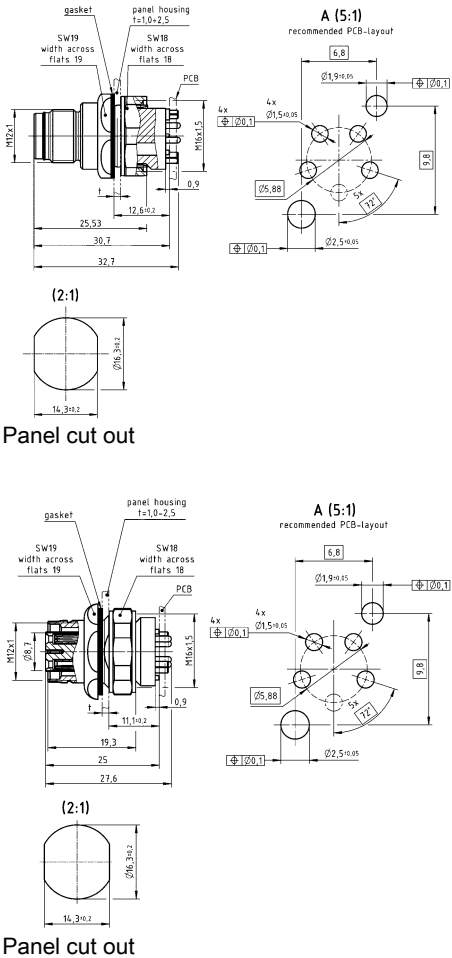
Technical characteristics

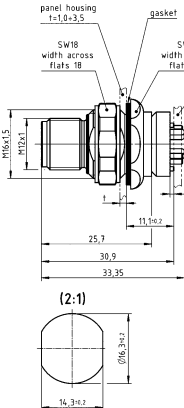
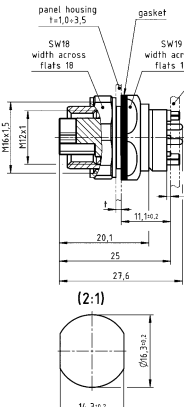

Colour (insert)	Black
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

IEC 61076-2-111



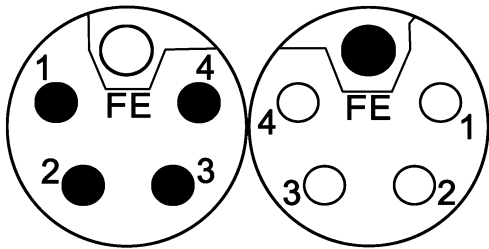
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 396 1532	21 03 396 2532	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 396 1533	21 03 396 2533	 Panel cut out  Panel cut out A (5:1) recommended PCB layout 

Number of contacts

4+ 

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

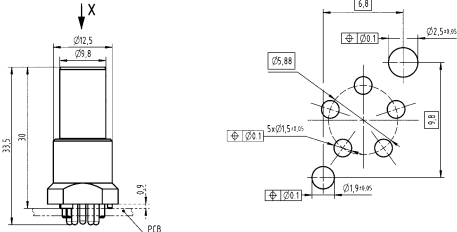
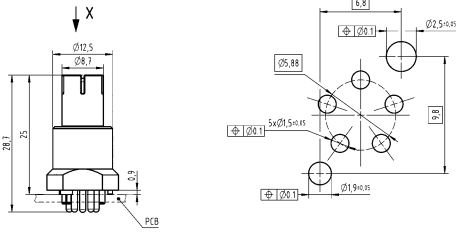
Technical characteristics

Colour (insert)	Grey
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

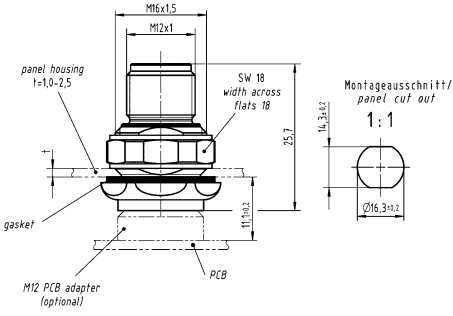
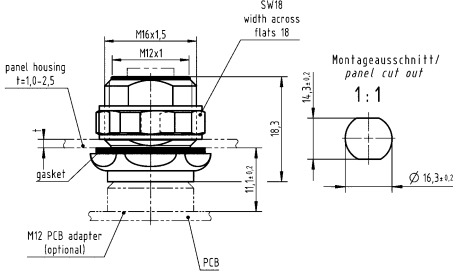
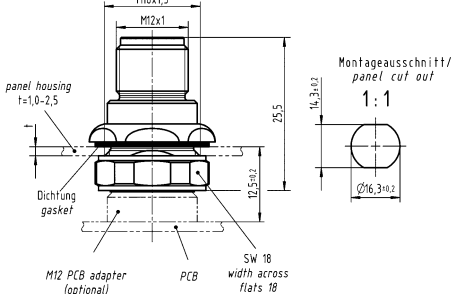
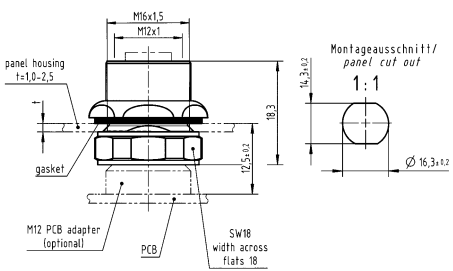
Specifications and approvals

IEC 61076-2-111



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray 	21 03 396 1505	21 03 396 2505	 

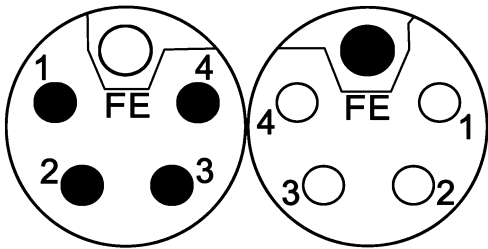
Order housings separately

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for rear mounting, Pack contents: 60 pieces 	21 03 302 1000	21 03 302 2000	 
Circular connectors M12, Housing, for front mounting, Pack contents: 60 pieces 	21 03 302 1001	21 03 302 2001	 

Number of contacts

4+ 

Reflow soldering termination (THR)
Shielded



Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

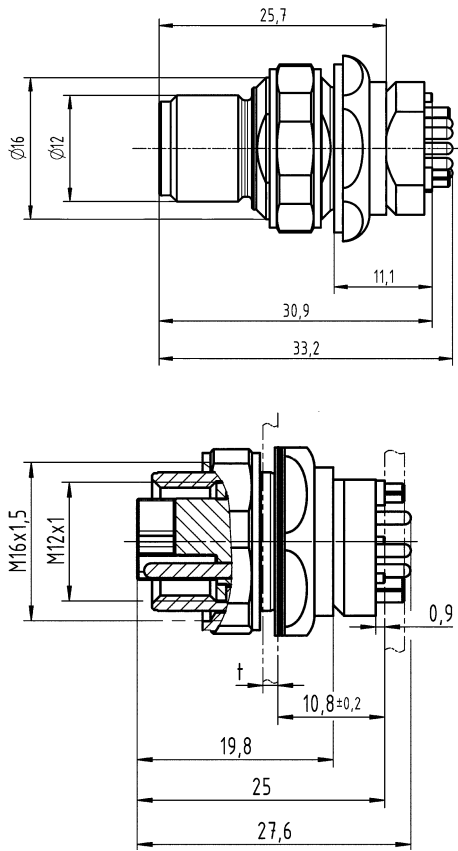
Technical characteristics

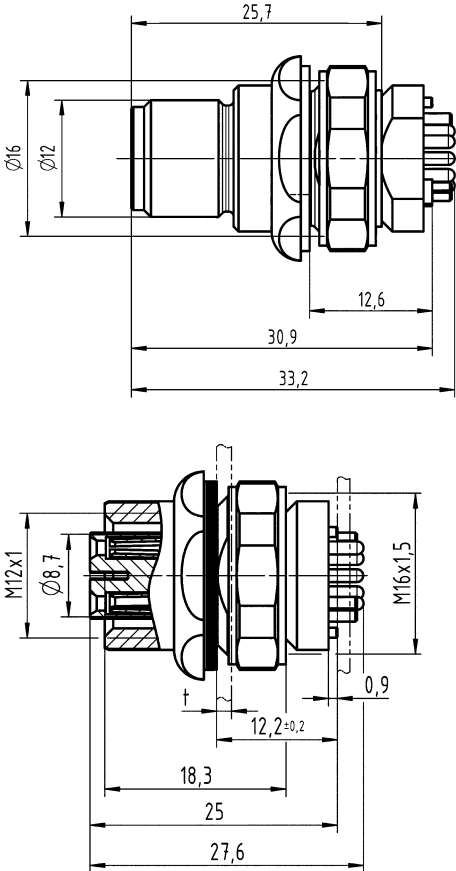
Colour (insert)	Grey
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-111



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded 	21 03 396 1530	21 03 396 2530	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 	21 03 396 1531	21 03 396 2531	

3+ 

Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

IEC 61076-2-111

**D03
12
.
68**

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, Housing, for front mounting, Pack contents: 30 pieces 	21 03 302 1001 407	21 03 302 2001 407	

M12


3+ 

IEC 61076-2-111

Number of contacts

4

Reflow soldering termination (SMT)
Shielded



M12

Technical characteristics

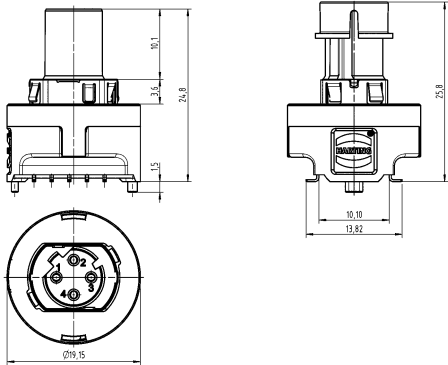
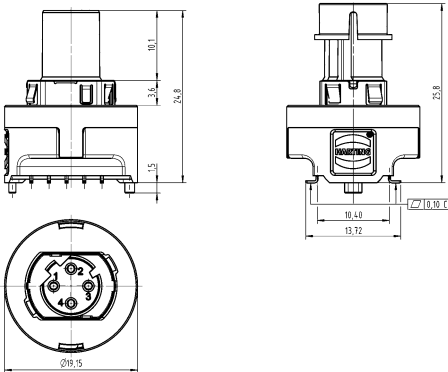
Number of contacts	4
Rated current	3 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz

Technical characteristics

Data rate	100 Mbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
Material (accessories)	Brass, nickel plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2410	
Order housings separately Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2411	
Order housings separately		



M12

Identification

Circular connectors M12,
Magnetics,
PCB adapter,
with integrated transformer,
Angled,
Reflow soldering termination (SMT),
Shielded,
Pack contents:
30 pieces in a tray

Order housings separately



Circular connectors M12,
Magnetics,
PCB adapter,
with integrated transformer,
Angled,
Power over Ethernet (PoE+),
Reflow soldering termination (SMT),
Shielded,
Pack contents:
30 pieces in a tray

Order housings separately



Circular connectors M12,
PushPull,
Housing,
for front mounting,
Pack contents:
30 pieces



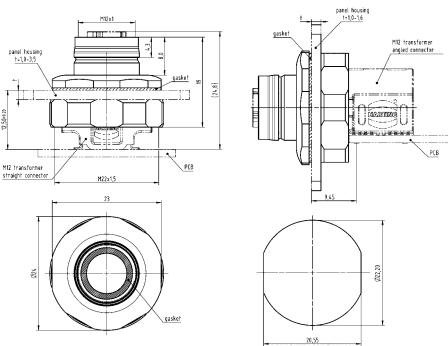
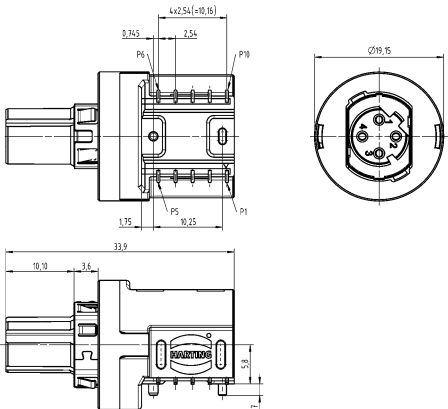
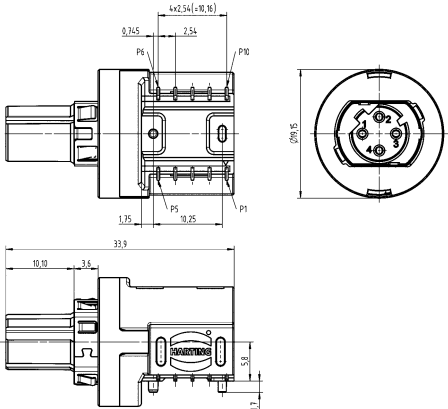
Part number
Female

21 03 381 4420

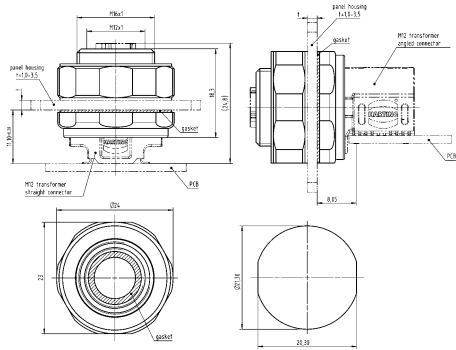
21 03 381 4421

21 03 301 2006

Drawing
(dimensions in mm)




Panel cut out

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces 	21 03 301 2007	 Panel cut out

Number of contacts

4

Reflow soldering termination (SMT)
Shielded



Technical characteristics

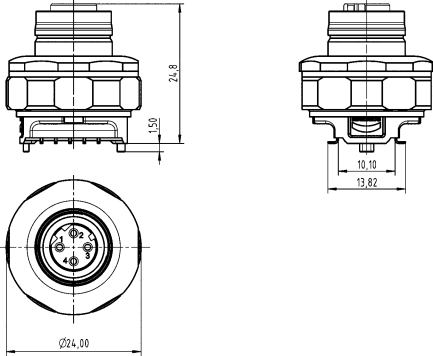
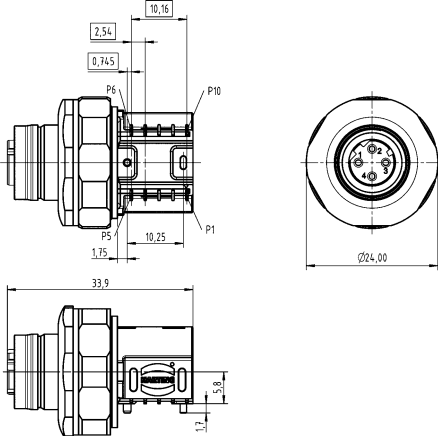
Number of contacts	4
Rated current	3 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 5, Class D up to 100 MHz

Technical characteristics

Data rate	100 Mbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals


IEC 61076-2-101

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Straight, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded	21 03 381 2421	
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Angled, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded	21 03 381 4422	

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



M12

Technical characteristics

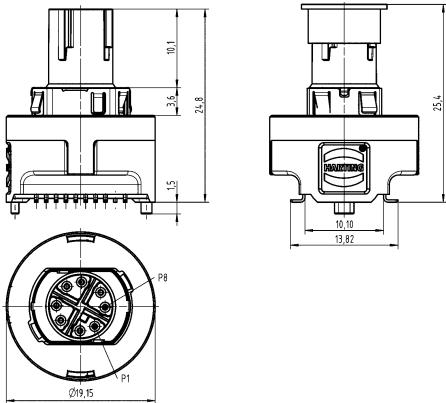
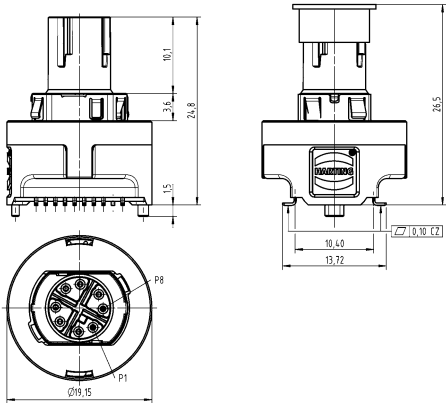
Number of contacts	8
Rated current	0.8 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

Technical characteristics

Data rate	1 Gbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
Material (accessories)	Brass, nickel plated
RoHS	compliant with exemption

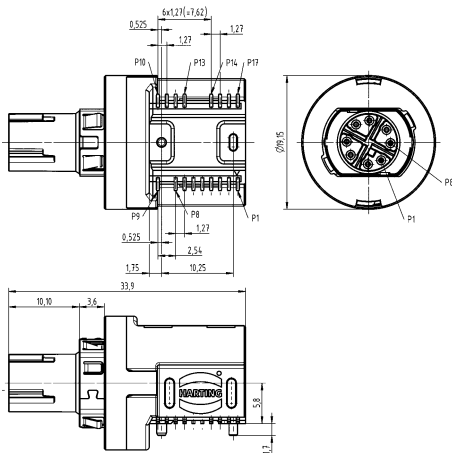
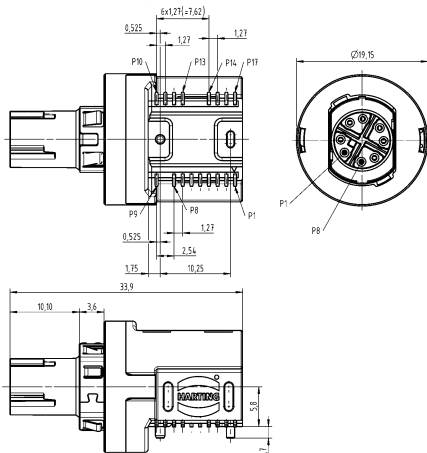
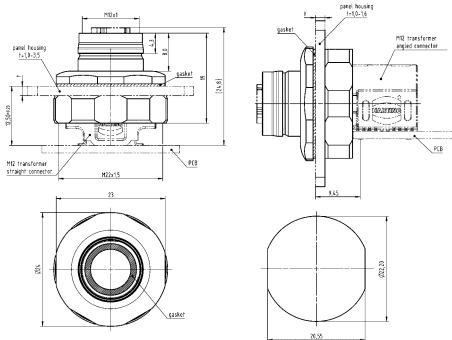
Specifications and approvals

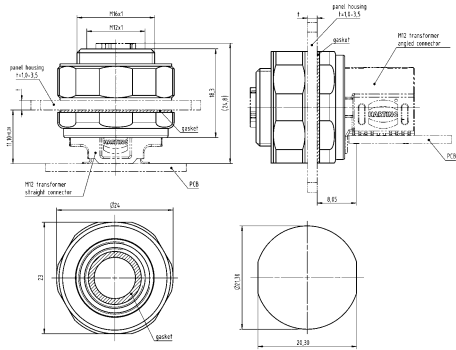
IEC 61076-2-109

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2815	
Order housings separately Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2817	
Order housings separately		

D03
12
·
75

M12


Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4820	
Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4822	
Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 30 pieces 	21 03 301 2006	 Panel cut out

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces 	21 03 301 2007	 Panel cut out

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



Technical characteristics

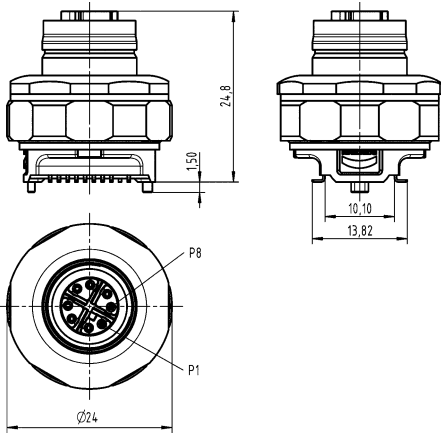
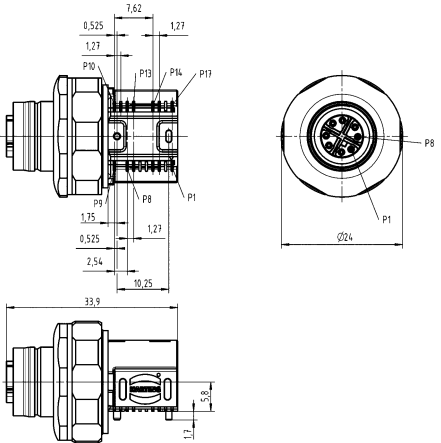
Number of contacts	8
Rated current	0.8 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

Technical characteristics

Data rate	1 Gbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals


IEC 61076-2-109

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Straight, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded 	21 03 381 2824	
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Angled, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded 	21 03 381 4826	

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



M12

Technical characteristics

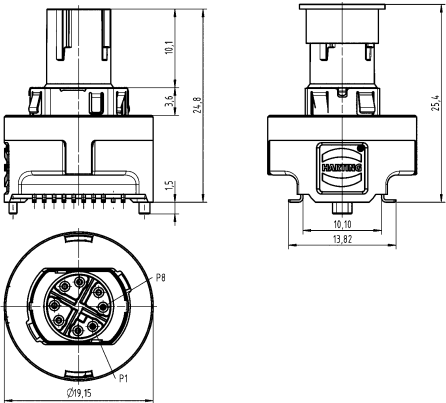
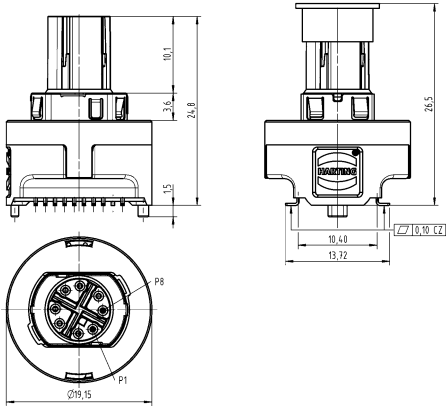
Number of contacts	8
Rated current	0.8 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

Technical characteristics

Data rate	10 Gbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
Material (accessories)	Brass, nickel plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2818	
Order housings separately Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Straight, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray 	21 03 381 2823	
Order housings separately		



M12

Identification

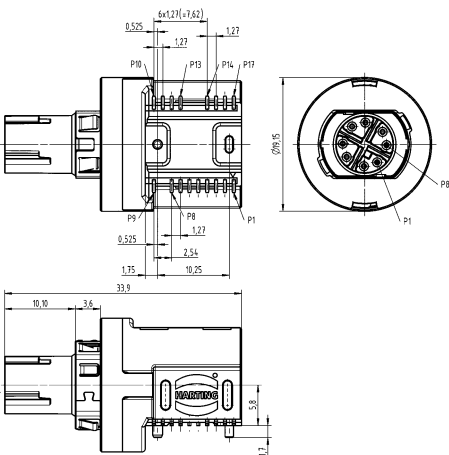
Part number
Female

Drawing
(dimensions in mm)

Circular connectors M12,
Magnetics,
PCB adapter,
with integrated transformer,
Angled,
Reflow soldering termination (SMT),
Shielded,
Pack contents:
30 pieces in a tray

21 03 381 4823

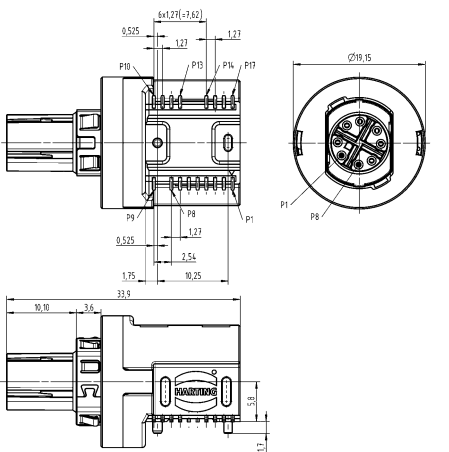
Order housings separately



Circular connectors M12,
Magnetics,
PCB adapter,
with integrated transformer,
Angled,
Power over Ethernet (PoE+),
Reflow soldering termination (SMT),
Shielded,
Pack contents:
30 pieces in a tray

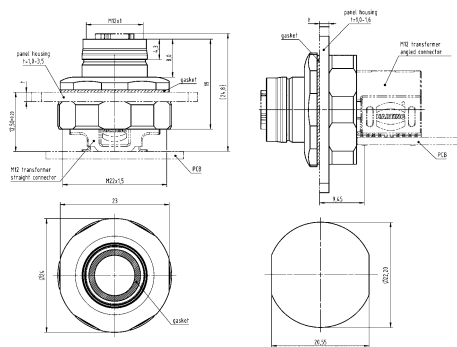
21 03 381 4825

Order housings separately

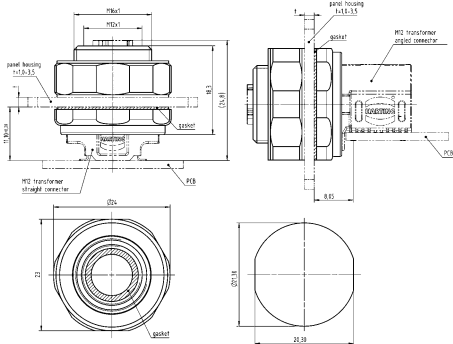


Circular connectors M12,
PushPull,
Housing,
for front mounting,
Pack contents:
30 pieces

21 03 301 2006




Panel cut out

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces 	21 03 301 2007	 Panel cut out

Number of contacts

8

Reflow soldering termination (SMT)
Shielded



Technical characteristics

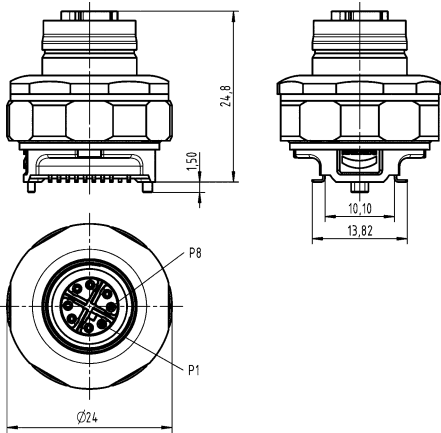
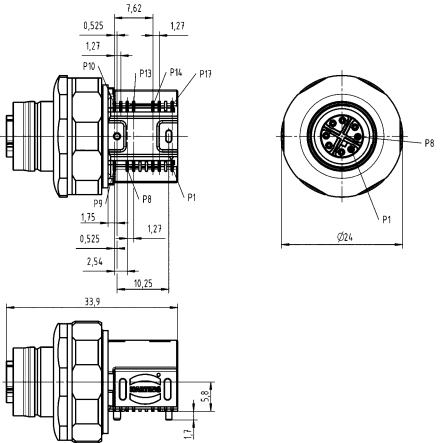
Number of contacts	8
Rated current	0.8 A
Rated voltage	57 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

Technical characteristics

Data rate	10 Gbit/s
Tightening torque	2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109

Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Straight, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded 	21 03 381 2825	
Circular connectors M12, Magnetics, PushPull, PCB adapter, with integrated transformer, Angled, incl. housing, Power over Ethernet (PoE+), for front mounting, Reflow soldering termination (SMT), Shielded 	21 03 381 4827	


D03
12
-
82



Number of contacts

3

Unshielded



M12

Technical characteristics

Number of contacts	3
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.25 mm ²
Conductor cross-section	AWG 24

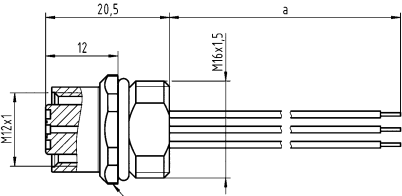
Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101



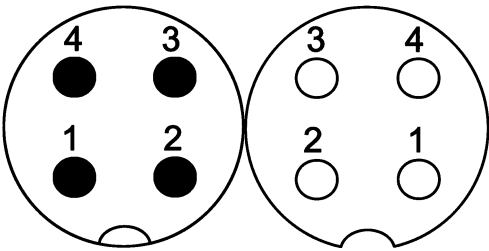
Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded  without lock nut	0.25	21 03 317 6305	 M12 A-coded 3-poles, female straight PFT connector



Number of contacts

4

Unshielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	50 cm, 100 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.5 mm^2 , 0.25 mm^2
Conductor cross-section	AWG 20, AWG 24
Tightening torque	2 Nm Lock nut

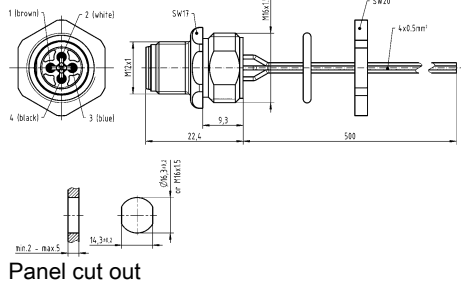
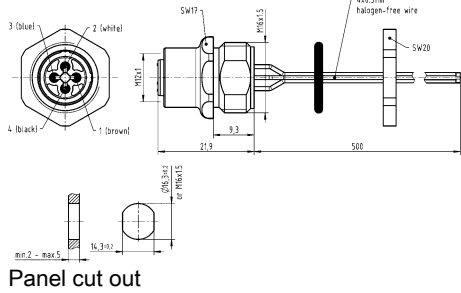
Technical characteristics

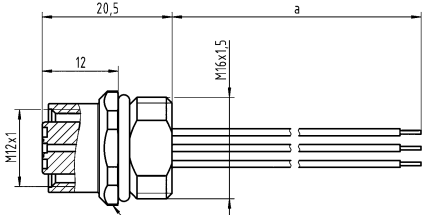
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079



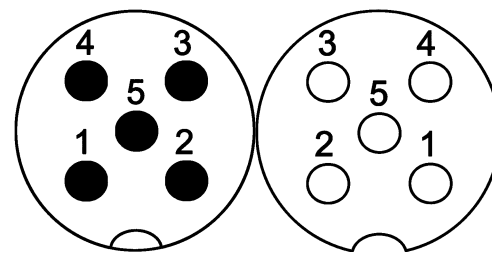
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded, Pack contents: incl. lock nut 	0.5	21 03 311 1402	21 03 311 2400	 Panel cut out  Panel cut out

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded without lock nut	0.25		21 03 317 6405 21 03 317 6410	 M12 A-coded 4-pole, female straight PFT connector 21 03 317 6405: a = 50 cm 21 03 317 6410: a = 100 cm

Number of contacts

5

Unshielded



Technical characteristics

Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	50 cm, 100 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.5 mm ² , 0.25 mm ²
Conductor cross-section	AWG 20, AWG 24
Tightening torque	2 Nm Lock nut

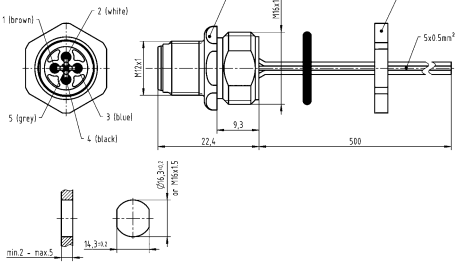
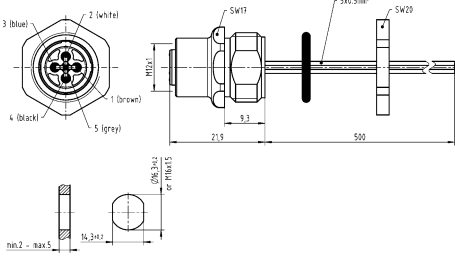
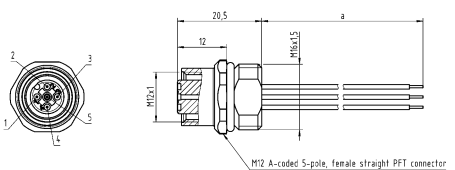
Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079




Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded, Pack contents: incl. lock nut 	0.5	21 03 311 1501	21 03 311 2501	 Panel cut out  Panel cut out
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded without lock nut	0.25		21 03 317 6505 21 03 317 6510	 21 03 317 6505: a = 50 cm 21 03 317 6510: a = 100 cm



Number of contacts

8

Unshielded



M12

Technical characteristics

Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm, 100 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.25 mm ²
Conductor cross-section	AWG 24

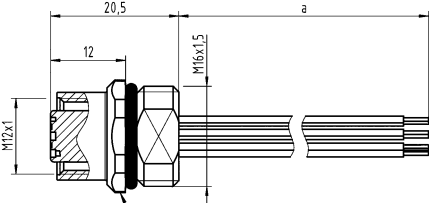
Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals


IEC 61076-2-101



Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded  without lock nut	0.25 0.25	21 03 317 6805 21 03 317 6810	 M12 A-coded 8-poles, female straight PFT connector 21 03 317 6805: a = 50 cm 21 03 317 6810: a = 100 cm

Number of contacts

M12
12
Unshielded



Technical characteristics

Number of contacts	12
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.13 mm ²
Conductor cross-section	AWG 26
Tightening torque	2 Nm Lock nut

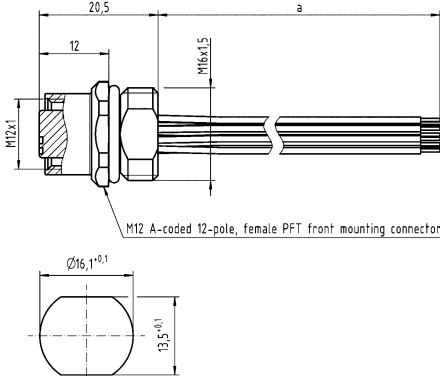
Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101




Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded  without lock nut	0.13	21 03 353 2C00	 M12 A-coded 12-pole, female PFT front mounting connector Panel cut out

Number of contacts

4

Unshielded



M12

Technical characteristics

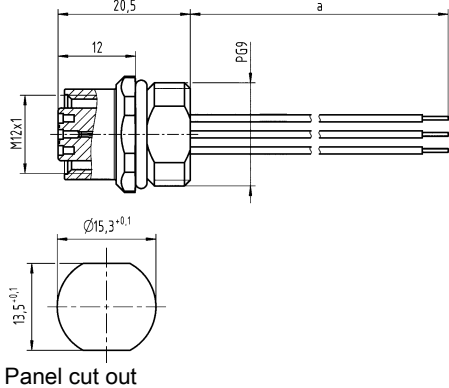
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.34 mm ²

Technical characteristics

Conductor cross-section	AWG 22
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

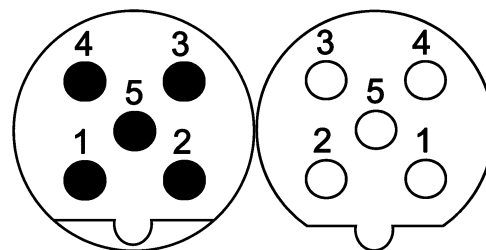
IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded  without lock nut	0.34	21 03 338 6405	

Number of contacts

5

Unshielded



Technical characteristics


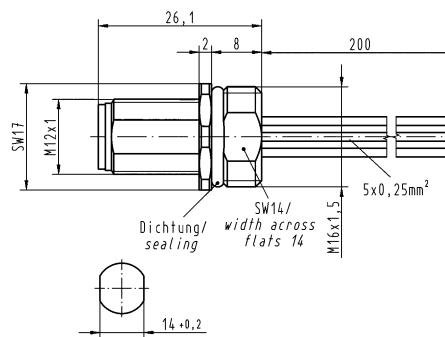
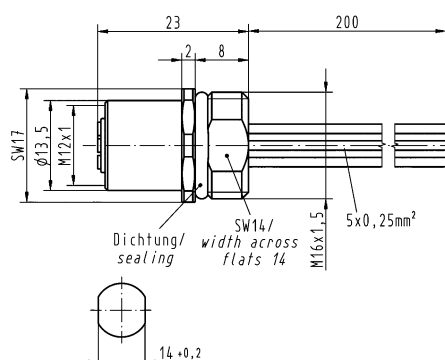
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	20 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.34 mm ²
Conductor cross-section	AWG 22

Technical characteristics

Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-101
 UL 1977 ECBT2.E102079
 CSA-C22.2 No. 182.3 ECBT8.E102079

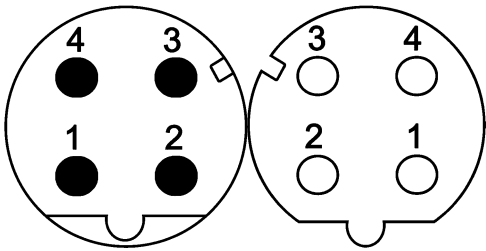
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded 	0.34	21 03 339 1301	21 03 339 2301	 Panel cut out  Panel cut out



Number of contacts

4

Unshielded



M12

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.34 mm ² , 0.5 mm ²
Conductor cross-section	AWG 22, AWG 20
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded	0.34 0.5	21 03 371 1403 21 03 371 1405	21 03 371 2403	

D03
12
91



M12

Circular connectors M12,
Panel feed through,
With conductors,
for front mounting,
Unshielded



without lock nut

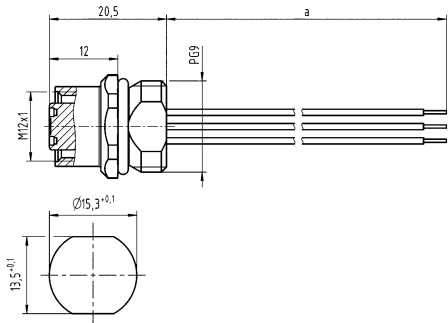
Conductor
cross-section
(mm²)

0.34

Part number
Male Female

21 03 375 2400

Drawing
(dimensions in mm)




Panel cut out



Number of contacts

8

4x 2x AWG 24/7
Shielded



M12

Technical characteristics

Number of contacts	8
Core structure	4x 2x AWG 24/7, 4x 2x AWG 26/7
Rated current	0.5 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Tightening torque	2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-109

Details

Other cable lengths on request!

Identification	Cable length	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, Pre-assembled on one side, EtherRail cable (4x 2x AWG 24/7), for rear mounting, Shielded	0.3 m 0.5 m 1 m 1.5 m	21 33 070 0853 003 21 33 070 0853 005 21 33 070 0853 010 21 33 070 0853 015	
Circular connectors M12, Panel feed through, Pre-assembled on one side, Industrial Ethernet cable (4x 2x AWG 26/7), for rear mounting, Shielded	0.3 m 0.5 m 1 m 1.5 m	21 33 080 0850 003 21 33 080 0850 005 21 33 080 0850 010 21 33 080 0850 015	

4+ 

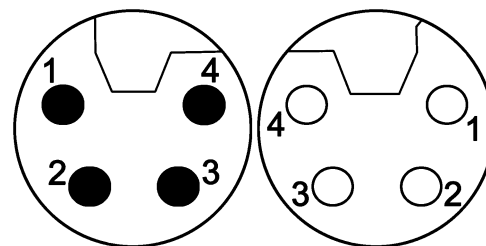
IEC 61076-2-111

**D03
12
.
94**

Number of contacts

4

Unshielded



M12

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	30 cm
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	1.5 mm ² , 2.5 mm ²
Conductor cross-section	AWG 16, AWG 14
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Black
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-111
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Unshielded	1.5	21 03 596 1506	21 03 596 2506	Panel cut out
	2.5	21 03 599 1506	21 03 599 2506	

M12

Circular connectors M12,
Power,
Panel feed through,
With conductors,
for rear mounting,
Unshielded

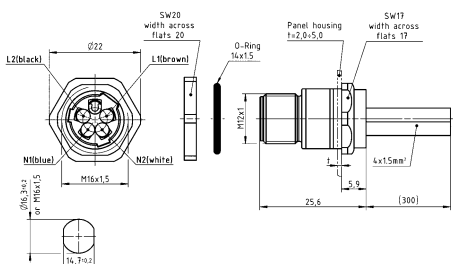


Conductor
cross-section
(mm²)

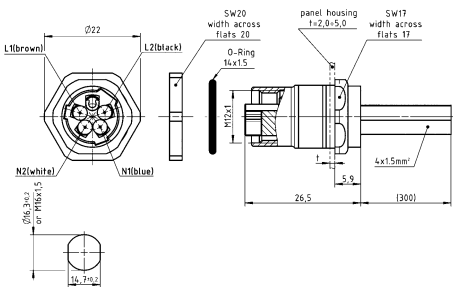
Part number
Male Female

Drawing
(dimensions in mm)

Conductor cross-section (mm ²)	Part number Male	Part number Female
1.5	21 03 596 1516	21 03 596 2516
2.5	21 03 599 1516	21 03 599 2516



Panel cut out

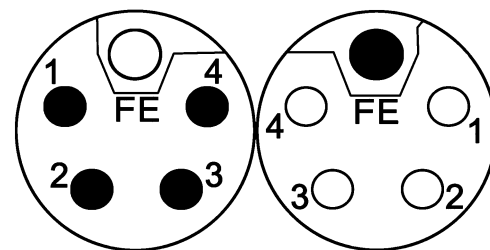


Panel cut out

Number of contacts

4+

Unshielded



M12

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	30 cm
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	1.5 mm ² , 2.5 mm ²
Conductor cross-section	AWG 16, AWG 14
Tightening torque	2 Nm Lock nut
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Grey
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-111
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



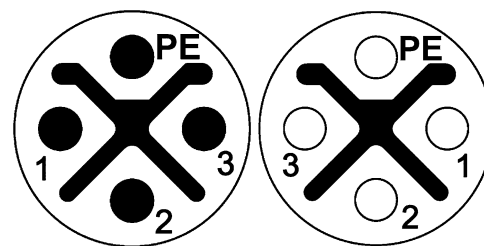
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Unshielded	1.5	21 03 596 1505	21 03 596 2505	Panel cut out
	2.5	21 03 599 1505	21 03 599 2505	
Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Unshielded	1.5	21 03 596 1515	21 03 596 2515	Panel cut out
	2.5	21 03 599 1515	21 03 599 2515	

D03
12
97

Number of contacts

3+

Unshielded



Technical characteristics

Number of contacts	3
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated

Technical characteristics

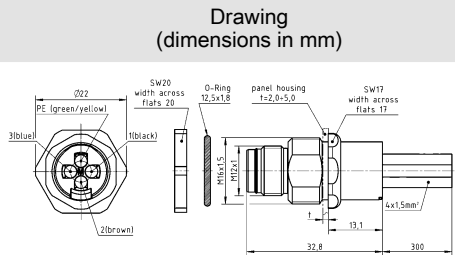
Conductor cross-section	1.5 mm ² , 2.5 mm ²
Conductor cross-section	AWG 16, AWG 14
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (contacts)	Brass
Surface (contacts)	Gold plated

Specifications and approvals

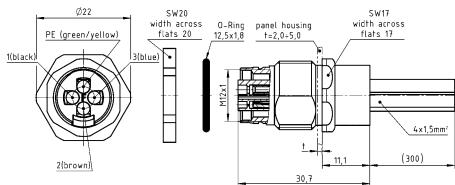
IEC 61076-2-111

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Unshielded	1.5	21 03 396 1401	21 03 396 2401	Panel cut out
	2.5	21 03 399 1401	21 03 399 2401	
				Panel cut out
				Panel cut out

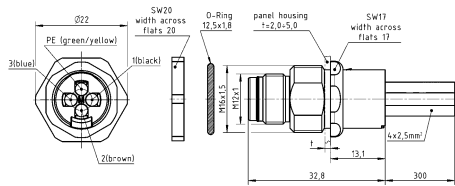
Identification	Conductor cross-section (mm²)	Part number	
		Male	Female
Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Unshielded	1.5	21 03 396 1402	21 03 396 2402
	2.5	21 03 399 1402	21 03 399 2402



Panel cut out



Panel cut out



Panel cut out


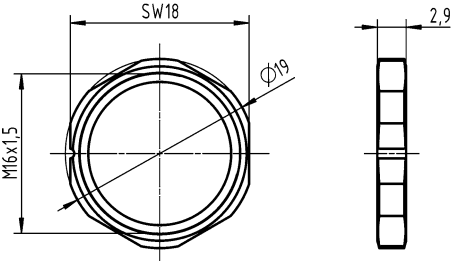
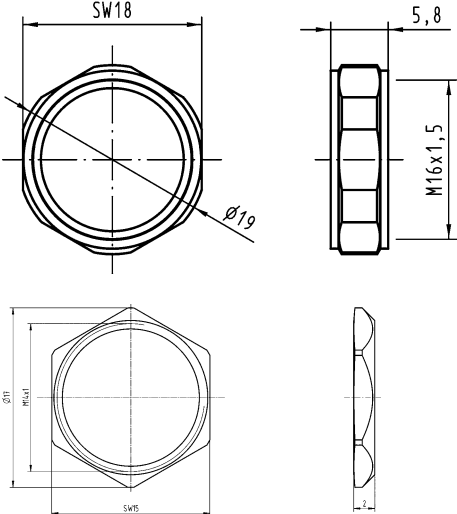
M12

M12

Technical characteristics

RoHS

compliant with exemption,
compliant

Identification	Part number	Drawing (dimensions in mm)
Lock nut, Pg 9	21 01 000 0008	
Lock nut, M16x1.5	21 01 000 0010 21 01 000 0018	
Lock nut, M14 x 1	21 41 000 0011	

Technical characteristics

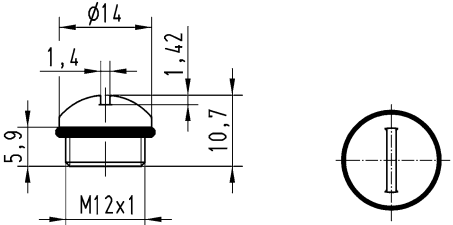
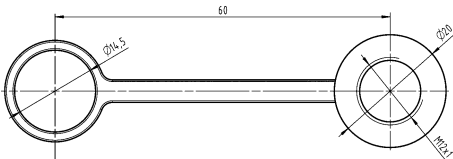
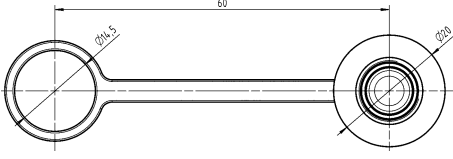
Degree of protection acc. to IEC IP65 / IP67, IP67 60529

Technical characteristics

Material (accessories)Thermoplastic

Colour (accessories)Black

RoHScompliant

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, IP65 / IP67	21 01 000 0003	
Circular connectors M12, Cap, for male inserts, with cord, IP67	21 41 000 0001	
Circular connectors M12, Cap, for female inserts, with cord, IP67	21 41 000 0002	

M12

Technical characteristics

Degree of protection acc. to IEC IP65 / IP67
60529

Technical characteristics

Material (accessories) Metal
RoHS compliant with exemption

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, for female inserts, with cord	21 01 000 0030	
Circular connectors M12, Cap, for female inserts, with cable clip	21 01 000 0031	
Circular connectors M12, Cap, for male inserts, with cord	21 01 000 0033	
Circular connectors M12, Cap, for male inserts, with cable clip	21 01 000 0038	

Contents

Page

M23 Signal inserts	D03 23.2
M23 Signal contacts	D03 23.22
M23 Signal Hoods/Housings	D03 23.23
M23 Power inserts	D03 23.28
M23 Power contacts	D03 23.33
M23 Power Hoods/Housings	D03 23.34

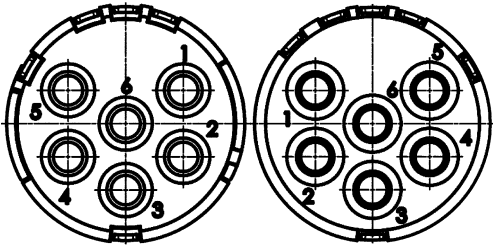
M23 Signal inserts



Number of contacts

6

Crimp termination



Technical characteristics

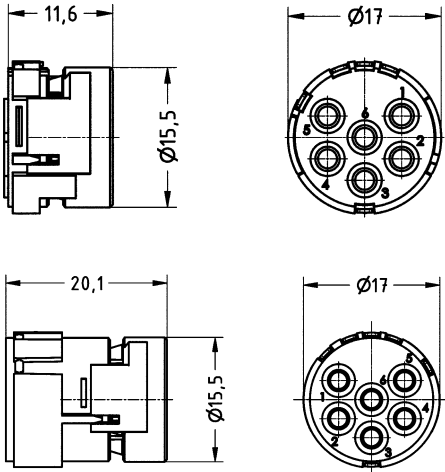
Number of contacts	6
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.75 ... 2.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

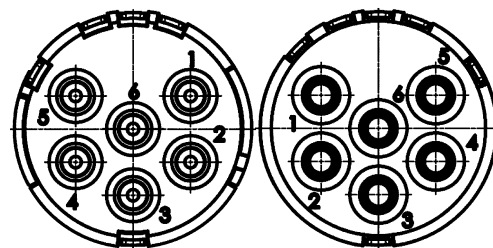
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 6x 2 mm	0.75 ... 2.5	09 15 106 3001	09 15 106 3101	

Number of contacts

6

Solder termination



M23

Technical characteristics

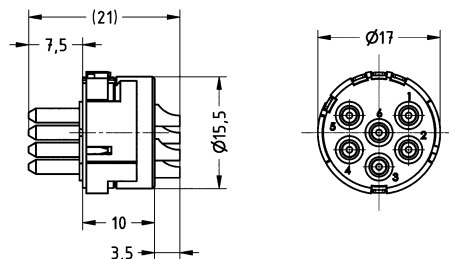
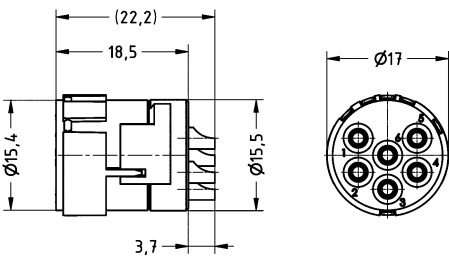
Number of contacts	6
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	2.5 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	2.5 max.	09 15 106 2602	09 15 106 2702	 

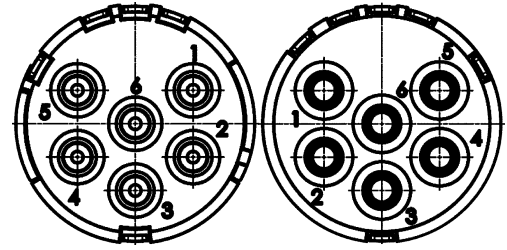
M23 Signal inserts



Number of contacts

6

PCB solder termination



Technical characteristics

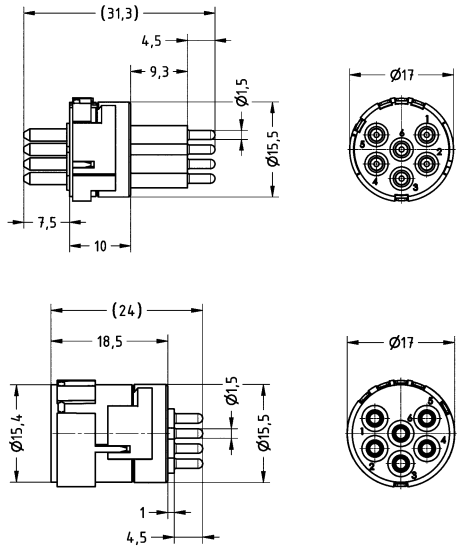
Number of contacts	6
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

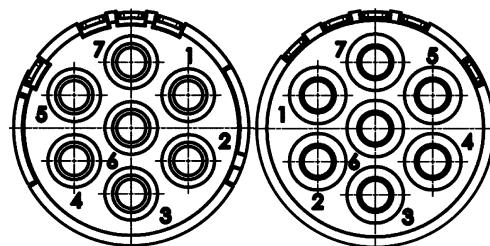
UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination  Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 106 2603	09 15 106 2703	

Number of contacts

7

Crimp termination



M23

Technical characteristics



Number of contacts	7
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.75 ... 2.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

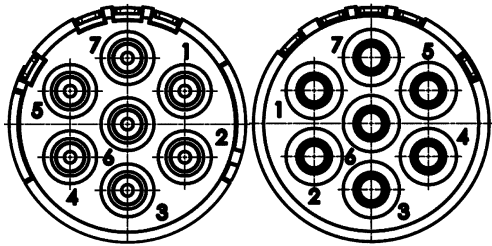
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 7x 2 mm	0.75 ... 2.5	09 15 107 3001	09 15 107 3101	 

Number of contacts

7

Solder termination



Technical characteristics



Number of contacts	7
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	2.5 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

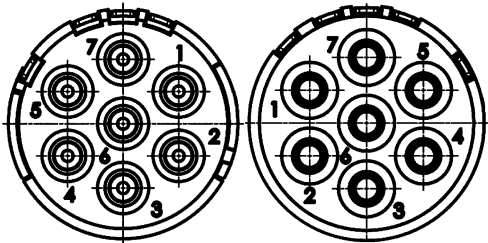
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	2.5 max.	09 15 107 2602	09 15 107 2702	 

Number of contacts

7

PCB solder termination



M23

Technical characteristics

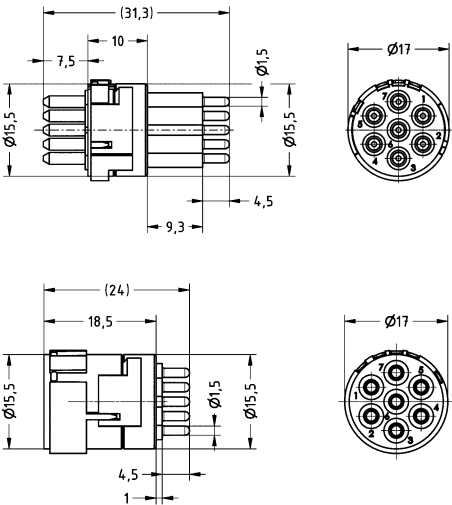
Number of contacts	7
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

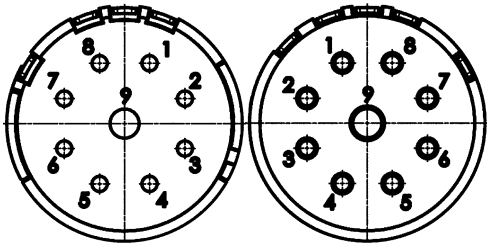
UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination  Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 107 2603	09 15 107 2703	

Number of contacts

8

+ 1 additional special contact
Crimp termination



Technical characteristics

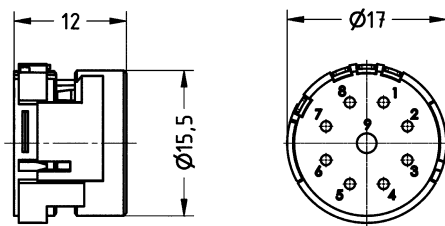
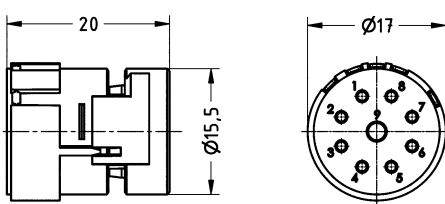
Number of contacts	8
Additional contacts	+ 1 additional special contact
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated current (special contact)	20 A
Rated voltage (special contact)	200 V
Rated impulse voltage (special contact)	2.5 kV
Pollution degree (special contact)	3
Insulation resistance	>10 ¹⁰ Ω

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

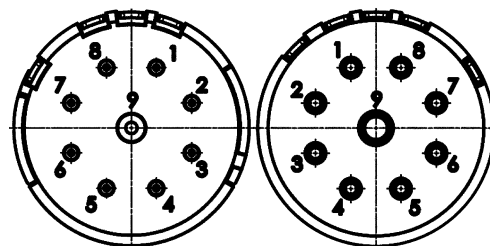
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 8x 1 mm 1x 2 mm	0.08 ... 1.5	09 15 109 3001	09 15 109 3101	 

Number of contacts

8

+ 1 additional special contact
Solder termination



M23

Technical characteristics

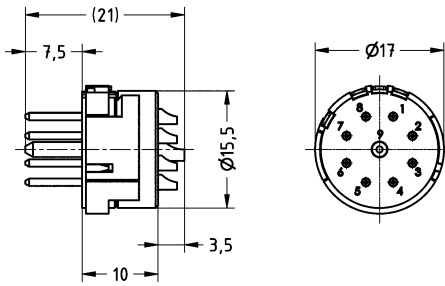
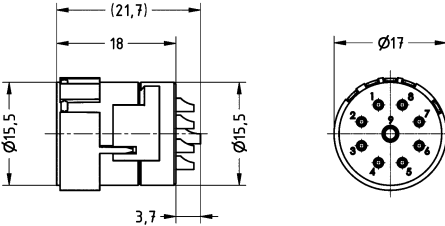
Number of contacts	8
Additional contacts	+ 1 additional special contact
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated current (special contact)	20 A
Rated voltage (special contact)	200 V
Rated impulse voltage (special contact)	2.5 kV
Pollution degree (special contact)	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 109 2602	09 15 109 2702	 

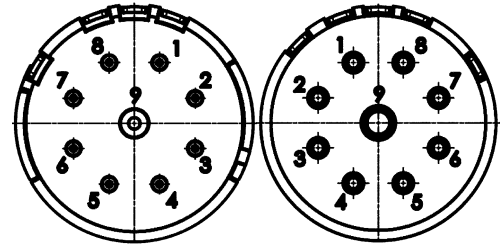
M23 Signal inserts



Number of contacts

8

+ 1 additional special contact
PCB solder termination



Technical characteristics


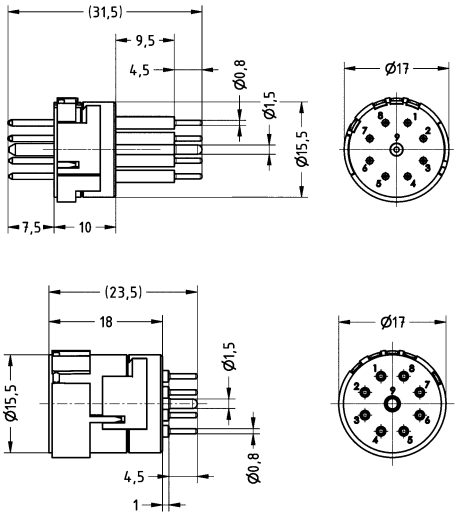
Number of contacts	8
Additional contacts	+ 1 additional special contact
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated current (special contact)	20 A
Rated voltage (special contact)	200 V
Rated impulse voltage (special contact)	2.5 kV
Pollution degree (special contact)	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

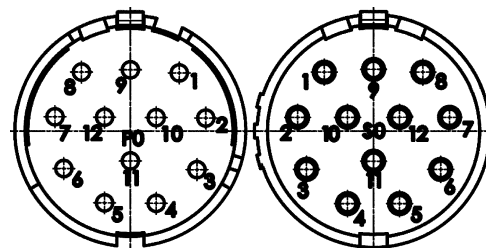
UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination  Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 109 2603	09 15 109 2703	

Number of contacts

11+

Crimp termination



M23

Technical characteristics



Number of contacts	11
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Grey
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

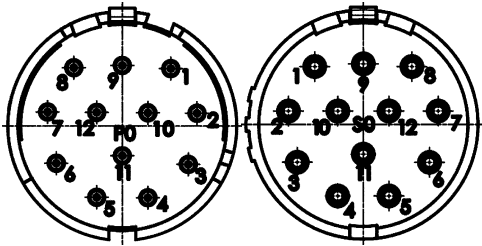
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3021	09 15 112 3121	 

Number of contacts

11+ 

Solder termination



Technical characteristics






Number of contacts	11
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	Grey

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

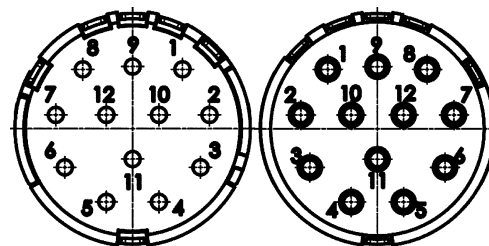
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 112 2622	09 15 112 2722	   

Number of contacts

12

Crimp termination



M23

Technical characteristics





Number of contacts	12
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3001	09 15 112 3101	 
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Crimp termination Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3011	09 15 112 3111	 

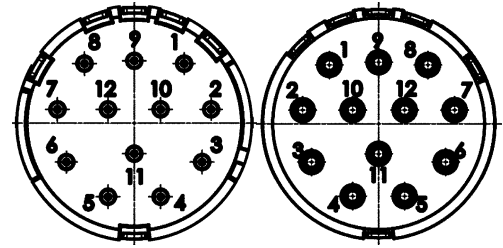
M23 Signal inserts



Number of contacts

12

Solder termination



Technical characteristics

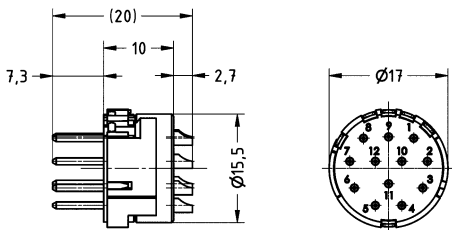
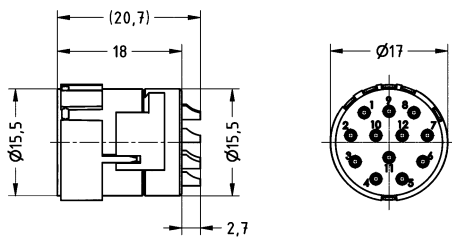
Number of contacts	12
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Specifications and approvals

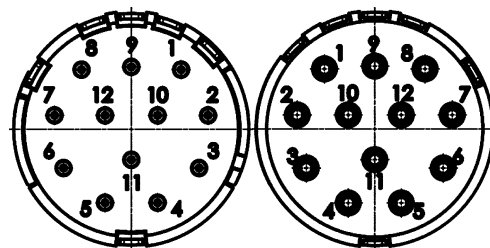
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 112 2602	09 15 112 2702	
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Solder termination	1 max.	09 15 112 2612	09 15 112 2712	

Number of contacts

12

PCB solder termination



M23

Technical characteristics

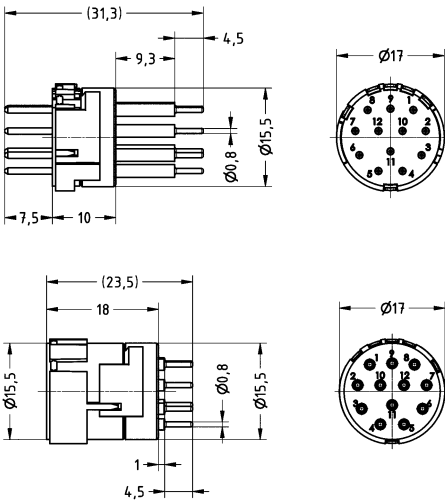
Number of contacts	12
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

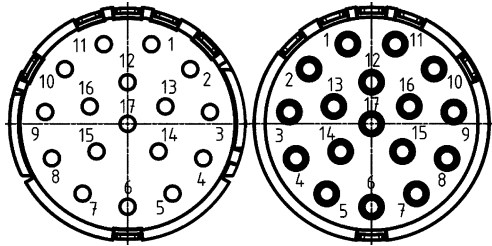
UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination  Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 112 2603	09 15 112 2703	

Number of contacts

17

Crimp termination



Technical characteristics

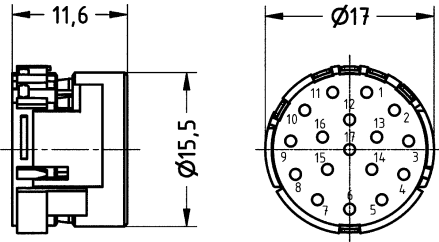
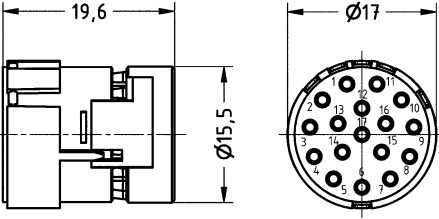
Number of contacts	17
Rated current	8 A
Rated voltage	160 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

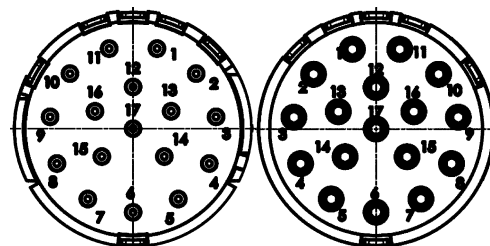
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 17x 1 mm	0.08 ... 1.5	09 15 117 3001	09 15 117 3101	 

Number of contacts

17

Solder termination



M23

Technical characteristics


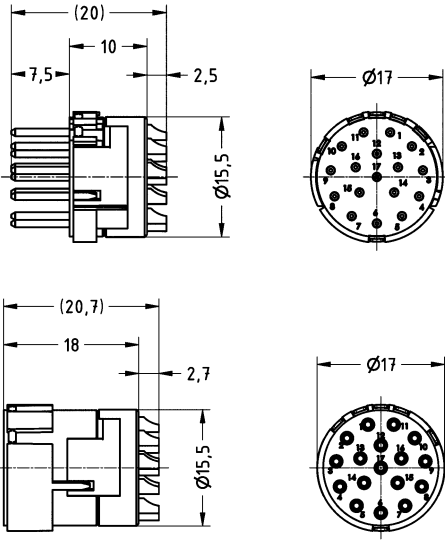
Number of contacts	17
Rated current	8 A
Rated voltage	160 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^6 \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

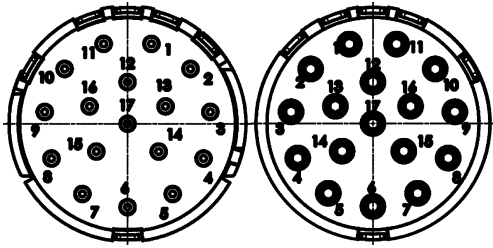
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 117 2602	09 15 117 2702	

D03
23
·
17

Number of contacts

17

PCB solder termination



Technical characteristics


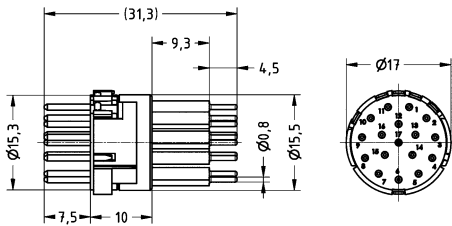
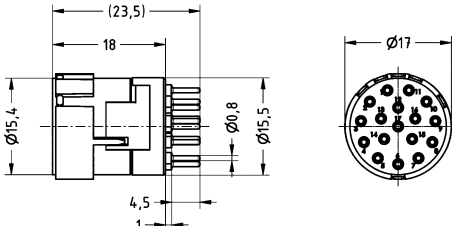
Number of contacts	17
Rated current	8 A
Rated voltage	160 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

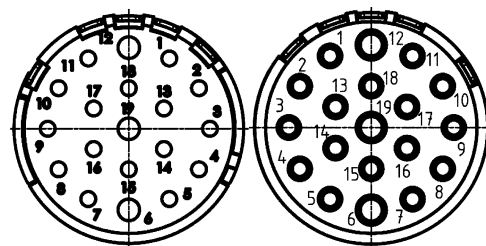
UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination  Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 117 2603	09 15 117 2703	 

Number of contacts

16

+ 3 additional special contacts
Crimp termination



M23

Technical characteristics



Number of contacts	16
Additional contacts	+ 3 additional special contacts
Rated current	8 A
Rated voltage	100 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3
Insulation resistance	>10 ⁶ Ω

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

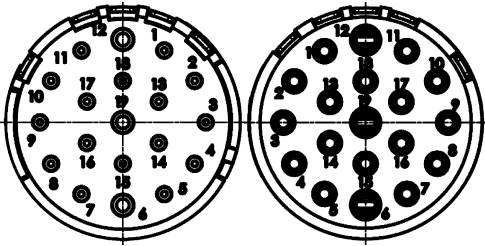
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 16x 1 mm 3x 1.5 mm	0.08 ... 1.5	09 15 119 3001	09 15 119 3101	 

Number of contacts

16

+ 3 additional special contacts
Solder termination



Technical characteristics

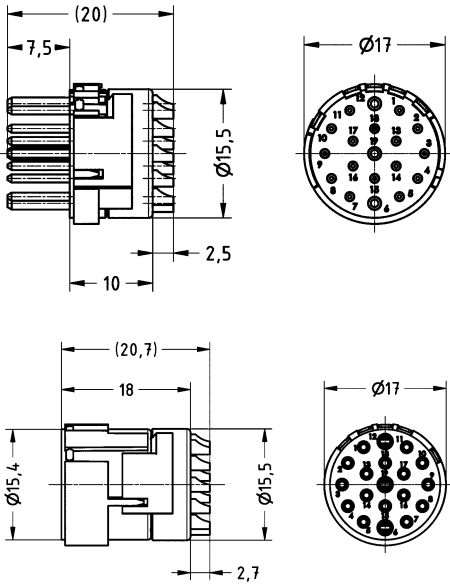
Number of contacts	16
Additional contacts	+ 3 additional special contacts
Rated current	8 A
Rated voltage	100 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

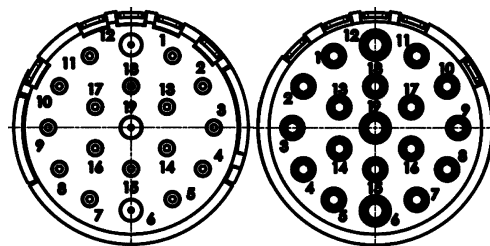
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 119 2602	09 15 119 2702	

Number of contacts

16

+ 3 additional special contacts
PCB solder termination



M23

Technical characteristics

Number of contacts	16
Additional contacts	+ 3 additional special contacts
Rated current	8 A
Rated voltage	100 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥500
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M23, Signal, Inserts, PCB solder termination Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!	09 15 119 2603	09 15 119 2703	

M23

Technical characteristics

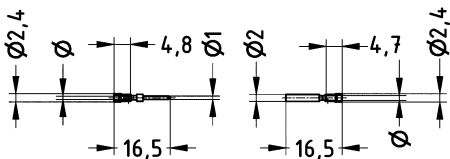
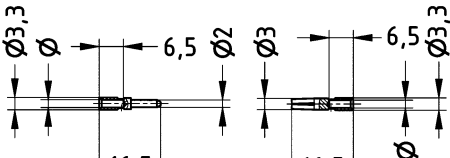
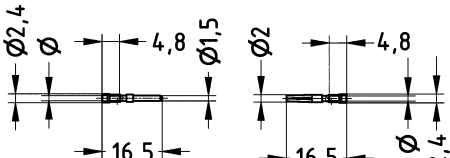
Contact resistance	≤3 mΩ
Conductor cross-section	0.08 ... 0.56 mm ² , 0.14 ... 1 mm ² , 0.75 ... 1.5 mm ² , 0.75 ... 2.5 mm ² , 0.34 ... 1 mm ² , 0.14 ... 0.56 mm ² , 0.56 ... 1 mm ²
Conductor cross-section	AWG 28 ... AWG 20, AWG 26 ... AWG 17, AWG 19 ... AWG 16, AWG 19 ... AWG 14, AWG 22 ... AWG 17, AWG 26 ... AWG 20, AWG 20 ... AWG 17

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Crimp contact, 1 mm, Turned contacts 	0.08 ... 0.56 0.14 ... 1 0.34 ... 1 0.75 ... 1.5	09 15 100 6101 09 15 100 6102 09 15 100 6103	09 15 100 6201 09 15 100 6202 09 15 100 6203	 Stripping length 4 mm
Circular connectors M23, Signal, Crimp contact, 2 mm, Turned contacts 	0.75 ... 2.5	09 15 100 6121	09 15 100 6221	 Stripping length 4 mm
Circular connectors M23, Signal, Crimp contact, 1.5 mm, Turned contacts 	0.14 ... 0.56 0.14 ... 1 0.56 ... 1	09 15 100 6111	09 15 100 6211 09 15 100 6212	 Stripping length 4 mm

D03
23
·
22

Technical characteristics

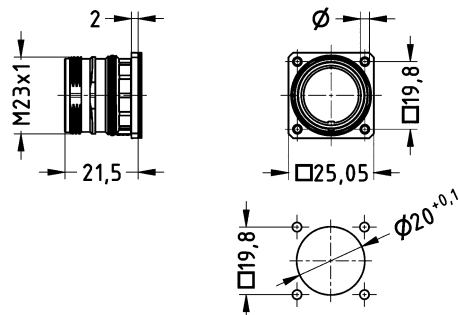
Limiting temperature	-40 ... +125 °C
Locking type	Screw locking, ComLock rapid locking
Degree of protection acc. to IEC 60529	IP67, in locked position, IP69 / IPX9K acc. to ISO 20653
Material (hood/housing)	Copper-zinc alloy
Surface (hood/housing)	Nickel plated
Material (seal)	NBR

Technical characteristics

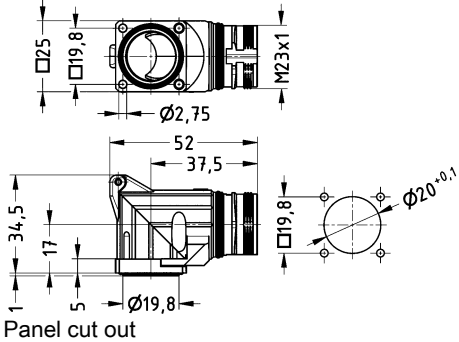
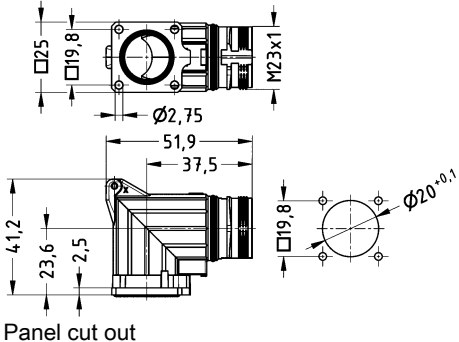
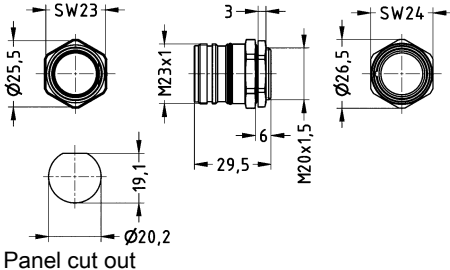
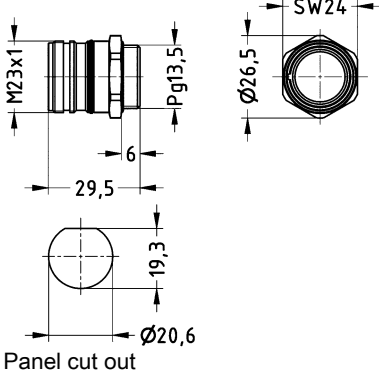
Colour (seal)	Black
RoHS	compliant with exemption, compliant

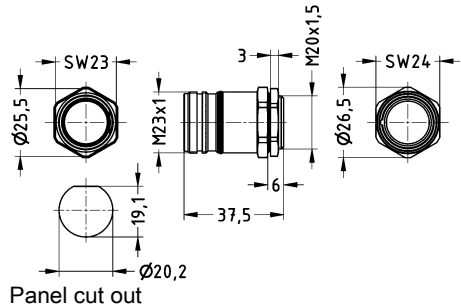
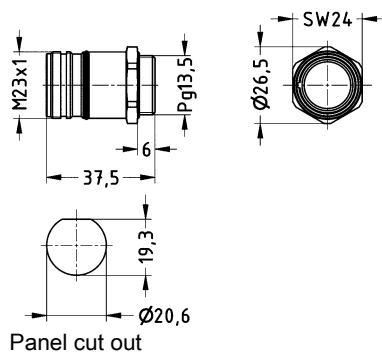
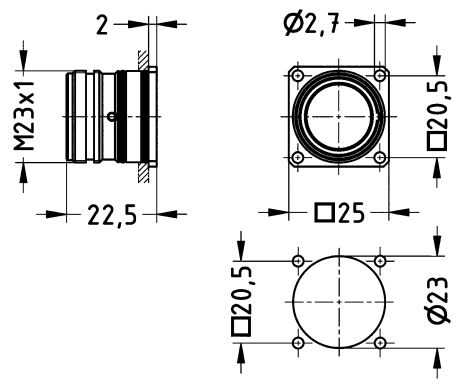
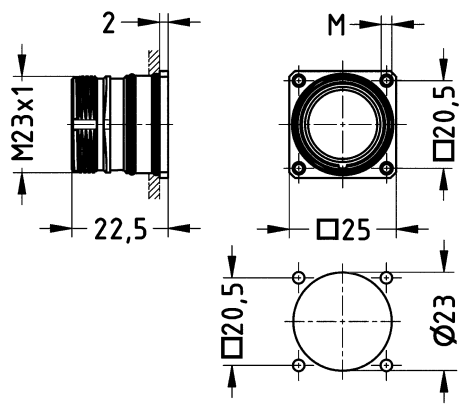
Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Fixing hole 4 x 2.7 mm 		09 15 100 0301	 Panel cut out
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Fixing hole 4 x 3.2 mm 		09 15 100 0302	

M23

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Angled, Fixing hole 4 x 2.7 mm 		09 15 100 0901	 Panel cut out
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Angled, Rotatable, Fixing hole 4 x 2.7 mm 		09 15 100 0902	 Panel cut out
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread M20 x 1.5  for male inserts Not compatible to ComLock		09 15 100 0363	 Panel cut out
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread Pg 13.5  for male inserts Not compatible to ComLock		09 15 100 0364	 Panel cut out

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread M20 x 1.5  for female inserts Not compatible to ComLock		09 15 100 0373	
Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread Pg 13.5  for female inserts Not compatible to ComLock		09 15 100 0374	
Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Fixing hole 4 x 2.7 mm 		09 15 100 0307	
Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M2.5 		09 15 100 0305	

M23

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
----------------	---------------------	-------------	-------------------------------

Circular connectors M23,
Signal,
Bulkhead mounted housing,
Rear mounting,
Thread 4 x M3



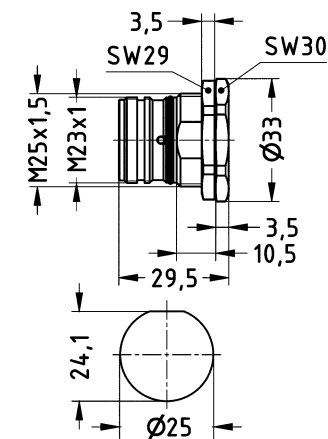
09 15 100 0306

Circular connectors M23,
Signal,
Bulkhead mounted housing,
Rear mounting,
Thread M25 x 1.5



09 15 100 0308

Not compatible to ComLock



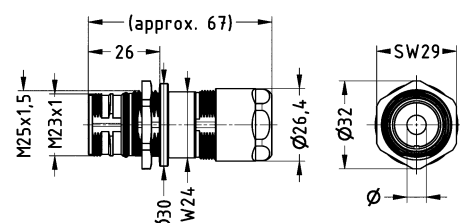
Panel cut out

Circular connectors M23,
Signal,
Panel feed through housing,
Rear mounting



3 ... 7
7 ... 12
11 ... 17

09 15 100 0309
09 15 100 0310
09 15 100 0311



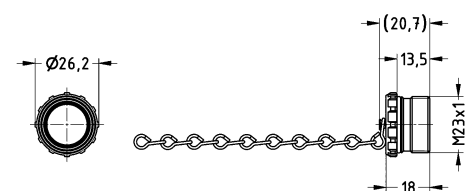
Panel cut out


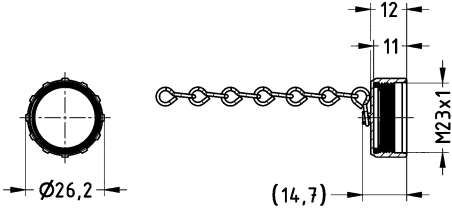
Circular connectors M23,
Signal,
Cover,
for hoods,
With chain (100 mm)



09 15 100 9103

Not compatible to ComLock



Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing 		09 15 100 9101	
Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm) 		09 15 100 9102	

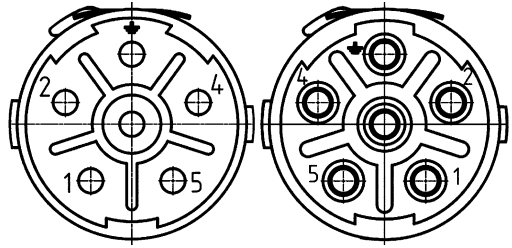
M23 Power inserts



Number of contacts

5+

Crimp termination



Technical characteristics

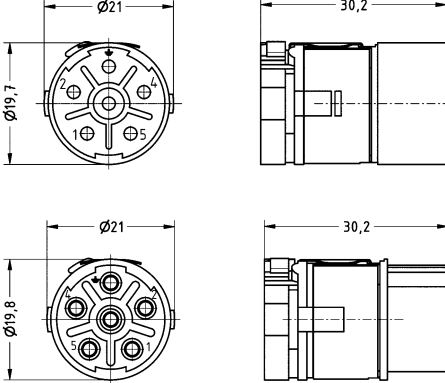
Number of contacts	5
Rated current	28 A
Rated voltage	600 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

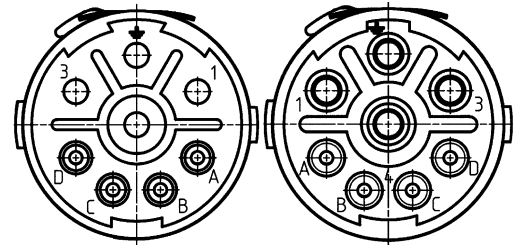
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Crimp termination  Please order crimp contacts separately. 6x 2 mm	0.14 ... 4	09 15 606 3001	09 15 606 3101	

Number of contacts

3+

+ 4 additional signal contacts
Crimp termination



M23

Technical characteristics

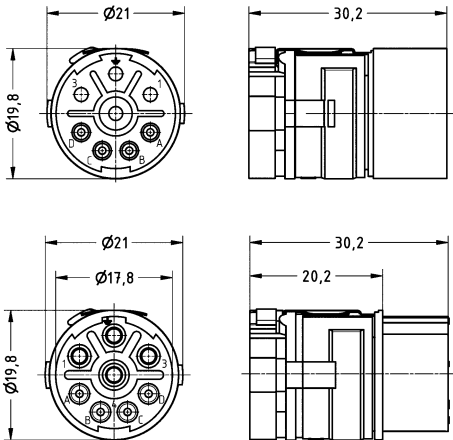
Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Rated current	28 A
Rated voltage	600 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	8 A
Rated voltage (signal)	300 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

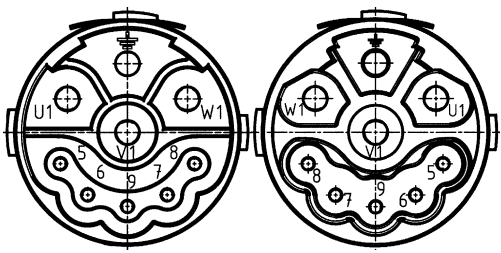
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Crimp termination  Please order crimp contacts separately. 4x 2 mm 4x 1 mm	0.14 ... 4	09 15 608 3001	09 15 608 3101	

Number of contacts

3+ 

+ 5 additional signal contacts
Crimp termination



Technical characteristics

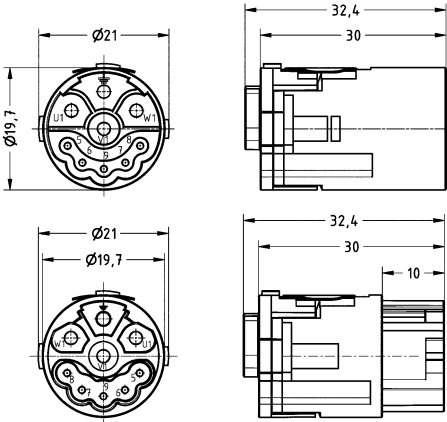
Number of contacts	3
Additional contacts	+ 5 additional signal contacts
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	>10 ¹³ Ω
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

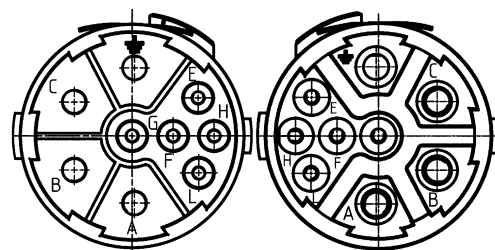
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Mating face (A), Crimp termination  Please order crimp contacts separately. 4x 2 mm 5x 1 mm	0.14 ... 4	09 15 609 3001	09 15 609 3101	

Number of contacts

3+

+ 5 additional signal contacts
Crimp termination



M23

Technical characteristics

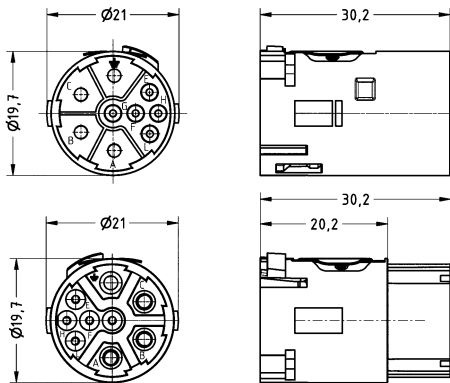
Number of contacts	3
Additional contacts	+ 5 additional signal contacts
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

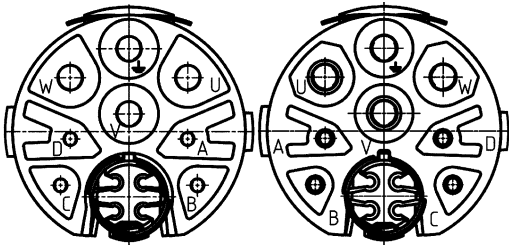
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Mating face (B), Crimp termination  Please order crimp contacts separately. 4x 2 mm 5x 1 mm	0.14 ... 4	09 15 609 3011	09 15 609 3111	

Number of contacts

3+ 

+ 4 additional signal contacts + 4 Data
Crimp termination



Technical characteristics




Number of contacts	3
Additional contacts	+ 4 additional signal contacts, + 4 Data
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	8 A
Rated voltage (signal)	300 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Rated current (data)	2 A
Rated voltage (data)	60 V
Rated impulse voltage (data)	0.5 kV

Technical characteristics

Pollution degree (data)	3
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 4 mm²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076




Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Hybrid, Inserts, Crimp termination  Please order crimp contacts separately. 4x 2 mm 4x 1 mm 4x 0.6 mm	0.08 ... 4	09 15 612 3001	09 15 612 3101	 

Technical characteristics

Contact resistance	≤3 mΩ
Conductor cross-section	0.08 ... 0.34 mm ² , 0.14 ... 1 mm ² , 0.75 ... 2.5 mm ² , 2.5 ... 4 mm ²
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Crimp contact, 0.6 mm, Turned contacts 	0.08 ... 0.34	09 15 600 6191	09 15 600 6291	 Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 1 mm, Turned contacts 	0.14 ... 1	09 15 600 6101	09 15 600 6201	 Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 2 mm, Turned contacts 	0.75 ... 2.5 2.5 ... 4	09 15 600 6121 09 15 600 6122	09 15 600 6221 09 15 600 6222	 Stripping length 7 mm

M23

Technical characteristics

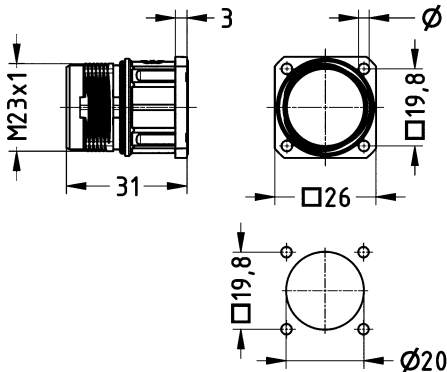
Limiting temperature	-40 ... +125 °C
Locking type	Screw locking, ComLock rapid locking
Degree of protection acc. to IEC 60529	IP67 / IP69 / IPX9K acc. to ISO 20653, in locked position
Material (hood/housing)	Copper-zinc alloy
Surface (hood/housing)	Nickel plated
Material (seal)	NBR

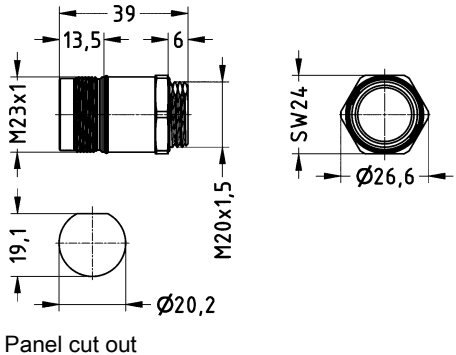
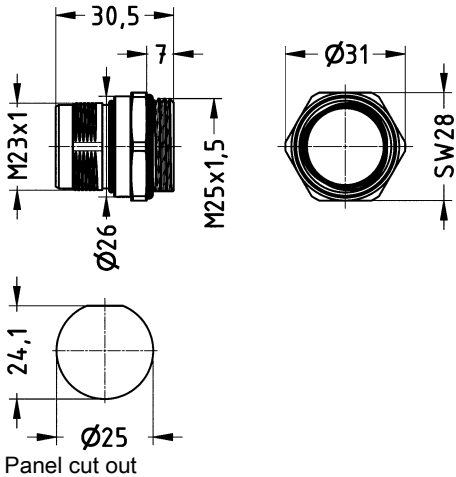
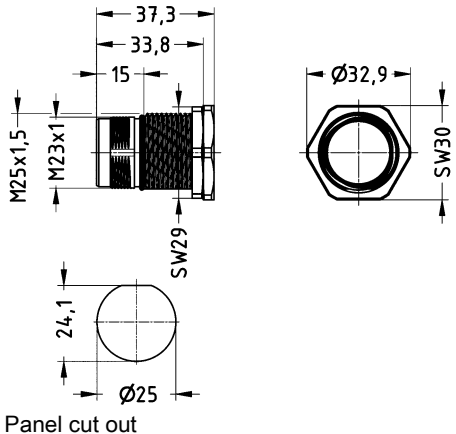
Technical characteristics

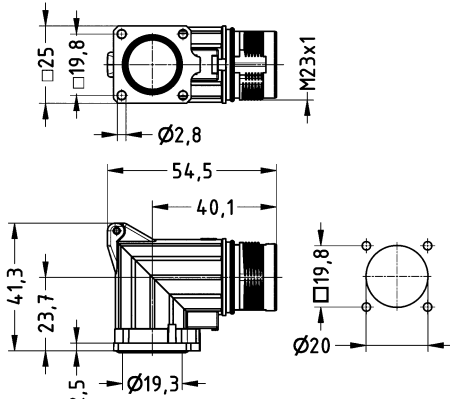
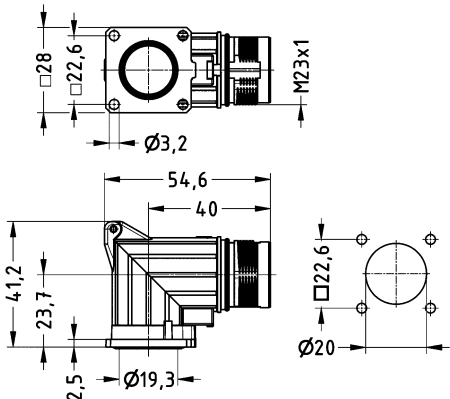
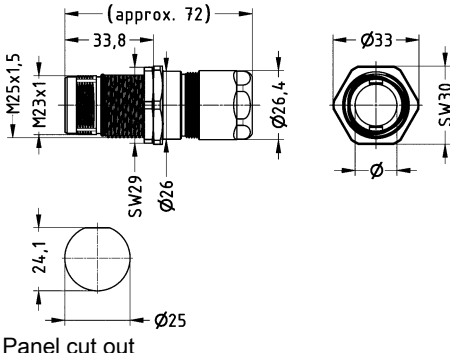
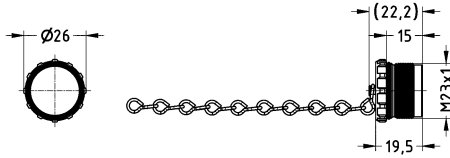
Colour (seal)	Black
RoHS	compliant, compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Power, Bulkhead mounted housing, Straight, Front mounting, Fixing hole 4 x 2.7 mm 		09 15 600 0301	 Panel cut out
Circular connectors M23, Power, Bulkhead mounted housing, Straight, Front mounting, Fixing hole 4 x 3.2 mm 		09 15 600 0302	

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Power, Bulkhead mounted housing, Straight, Front mounting, Thread M20 x 1.5  Not compatible to ComLock		09 15 600 0303	
Circular connectors M23, Power, Bulkhead mounted housing, Straight, Front mounting, Thread M25 x 1.5 		09 15 600 0313	
Circular connectors M23, Power, Bulkhead mounted housing, Straight, Rear mounting, Thread M25 x 1.5 		09 15 600 0308	

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Power, Bulkhead mounted housing, Angled, Rotatable, Fixing hole 4 x 2.7 mm 		09 15 600 0902	 Panel cut out
Circular connectors M23, Power, Bulkhead mounted housing, Angled, Rotatable, Fixing hole 4 x 3.2 mm 		09 15 600 0912	 Panel cut out
Circular connectors M23, Power, Panel feed through housing, Rear mounting, EMC version 	7 ... 12 11 ... 17	09 15 600 0310 09 15 600 0311	 Panel cut out
Circular connectors M23, Power, Cover, for hoods, With chain (100 mm) 		09 15 600 9103	

Not compatible to ComLock

M23

D03
23
37

Contents

Page

Panel feed through	D03 35.2
--------------------------	----------

$2+ \text{ (ground)}$

A diagram of a circular component, likely a terminal block or connector. It features three terminals arranged in a triangular pattern. The top terminal is labeled 'PE' (Protective Earth). The bottom-left terminal is labeled '3' (Line 3). The bottom-right terminal is labeled '2' (Line 2).

Conductor cross-section	1 mm ²
Conductor cross-section	AWG 18
Material (insert)	Thermoplastic polyurethane (TPU)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption


CE

**D03
35
.
2**

Number of contacts

4

Unshielded



7/8

Technical characteristics

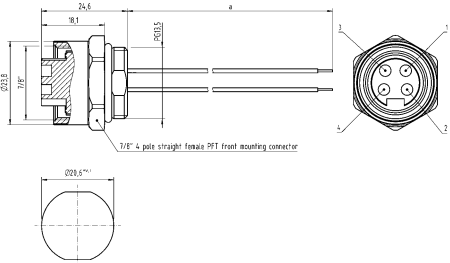
Number of contacts	4
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4.8 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67

Technical characteristics

Conductor cross-section	1 mm ²
Conductor cross-section	AWG 18
Material (insert)	Thermoplastic polyurethane (TPU)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

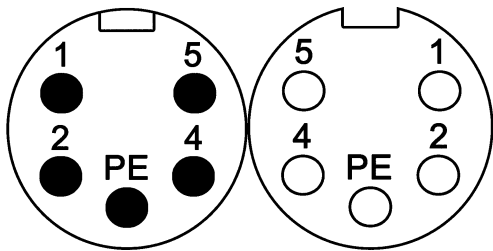


Identification	Conductor cross-section (mm ²)	Part number Female	Drawing (dimensions in mm)
Circular connectors 7/8", Panel feed through, With conductors, for front mounting, Unshielded 	1	21 04 316 2401	 Panel cut out

Number of contacts

4+ 

Unshielded



Technical characteristics

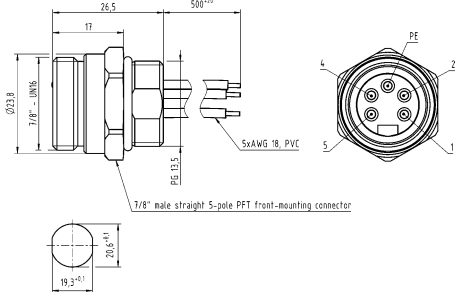
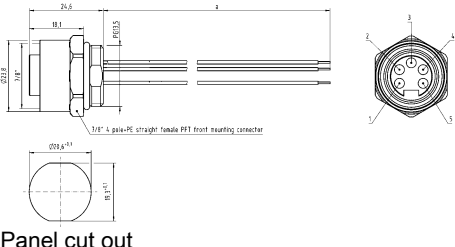
Number of contacts	4
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67

Technical characteristics

Conductor cross-section	1 mm ²
Conductor cross-section	AWG 18
Material (insert)	Thermoplastic polyurethane (TPU)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals



Identification	Conductor cross section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors 7/8", Panel feed through, With conductors, for front mounting, Unshielded 	1	21 34 740 0571 005	21 04 316 2501	 Panel cut out  Panel cut out

Contents	Page
----------	------

Panel feed through	D03 50.2
Accessories	D03 50.6

HARAX

Number of contacts

2+

HARAX® connection technology
Unshielded



Technical characteristics

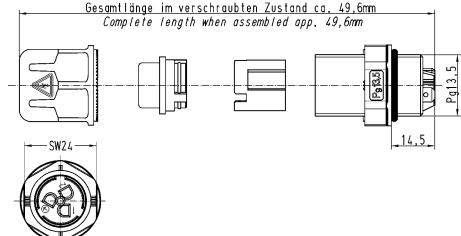
Number of contacts	2
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Wire outer diameter	≤2.8 mm
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16

Technical characteristics

Cable diameter	6 ... 9 mm
Material (insert)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (hood/housing)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Size	Part number	Drawing (dimensions in mm)
HARAX® , Panel feed through, With faston blades, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 3013	 Contact arrangement (view from mating side)
HARAX® , Panel feed through, With solder termination, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 3023	
HARAX® , Panel feed through, With conductors, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 3233	

Number of contacts

3

HARAX® connection technology
Unshielded



HARAX

Technical characteristics

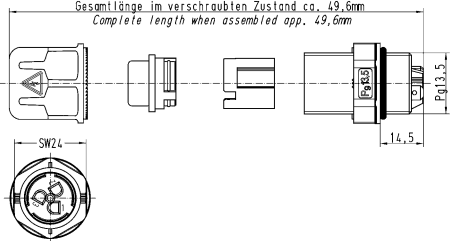
Number of contacts	3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Wire outer diameter	≤2.8 mm
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16

Technical characteristics

Cable diameter	6 ... 9 mm
Material (insert)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (hood/housing)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Size	Part number	Drawing (dimensions in mm)
HARAX® , Panel feed through, With faston blades, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 1013	 Contact arrangement (view from mating side)
HARAX® , Panel feed through, With solder termination, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 1023	
HARAX® , Panel feed through, With conductors, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	Pg 13.5	21 01 130 1223	

Number of contacts

3+

HARAX® connection technology
Unshielded



Technical characteristics

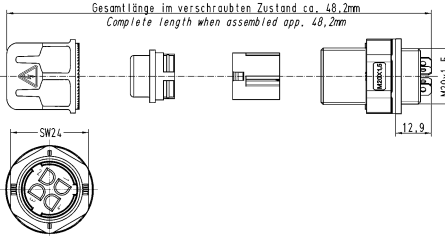
Number of contacts	3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Wire outer diameter	≤2.8 mm
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16

Technical characteristics

Cable diameter	6 ... 9 mm
Material (insert)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (hood/housing)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Size	Part number	Drawing (dimensions in mm)
HARAX® , Panel feed through, With solder termination, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5 0.75 ... 1.5	M20 Pg 13.5	21 01 141 3023 21 01 140 3023	 Contact arrangement (view from mating side)
HARAX® , Panel feed through, With conductors, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5	M20	21 01 141 3333	

Number of contacts

4

HARAX® connection technology
Unshielded



HARAX

Technical characteristics

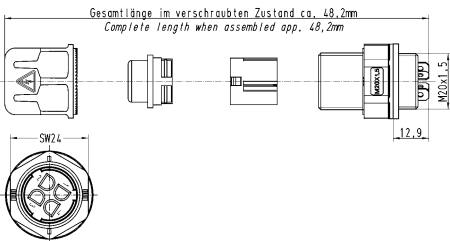
Number of contacts	4
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Wire outer diameter	≤2.8 mm
Conductor length	50 cm
Degree of protection acc. to IEC 60529	IP67
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16

Technical characteristics

Cable diameter	6 ... 9 mm
Material (insert)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (hood/housing)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals







UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Size	Part number	Drawing (dimensions in mm)
HARAX® , Panel feed through, With solder termination, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5 0.75 ... 1.5	M20 Pg 13.5	21 01 141 1023 21 01 140 1023	 Contact arrangement (view from mating side)
HARAX® , Panel feed through, With conductors, for front mounting, HARAX® connection technology, Unshielded 	0.75 ... 1.5 0.75 ... 1.5	M20 Pg 13.5	21 01 141 1323 21 01 140 1323	

HARAX

Technical characteristics

RoHS compliant with exemption,
compliant

Identification		Size	Part number	Drawing (dimensions in mm)	
HARAX® , Lock nut, Thermoplastic		M20 Pg 13.5	21 01 000 0009 21 01 000 0007	width across flats 24 SW24 	
				width across flats 27 SW27 	
HARAX® , Lock nut, Metal		Pg 13.5	21 01 000 0039	width across flats 24 SW24 	



Contents

Page

M8.....

C03 08.2

M8


Accessories

C03 08.11

Number of contacts

3

HARAX® connection technology
Unshielded



Technical characteristics

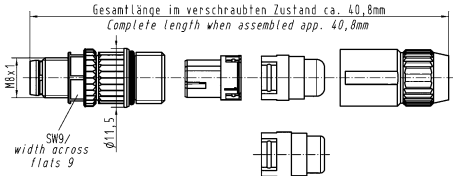
Number of contacts	3
Rated current	2 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.1 ... 0.14 mm ²

Technical characteristics

Conductor cross-section	AWG 27 ... AWG 26
Cable diameter	1.9 ... 3.5 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

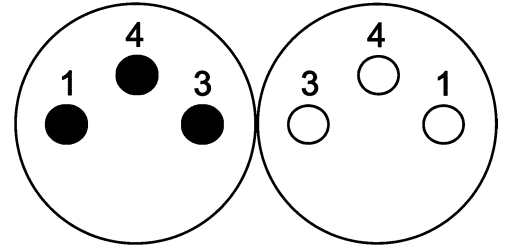
IEC 61076-2-104

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M8, M8-XS, Cable connector, Straight, HARAX® connection technology, Unshielded 	0.1 ... 0.14	21 02 159 1305	

Number of contacts

3

HARAX® connection technology
Unshielded



M8

Technical characteristics

Number of contacts	3
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Wire outer diameter	$\leq 1.6 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.14 ... 0.34 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

Cable diameter	2.5 ... 5.1 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

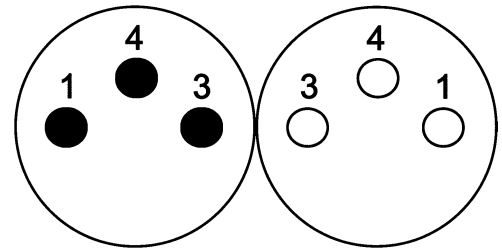
Specifications and approvals

IEC 61076-2-104
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, M8-S, Cable connector, Straight, HARAX® connection technology, Unshielded 	0.14 ... 0.34	21 02 151 1305	21 02 151 2305	

Number of contacts

3

Screw termination
Unshielded

Technical characteristics

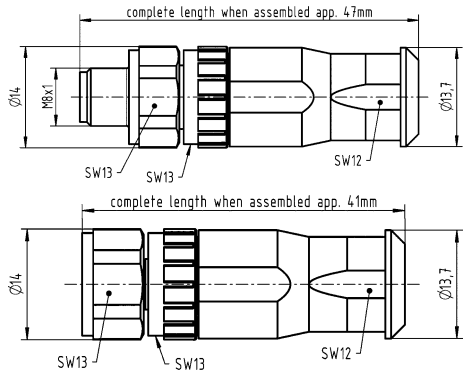
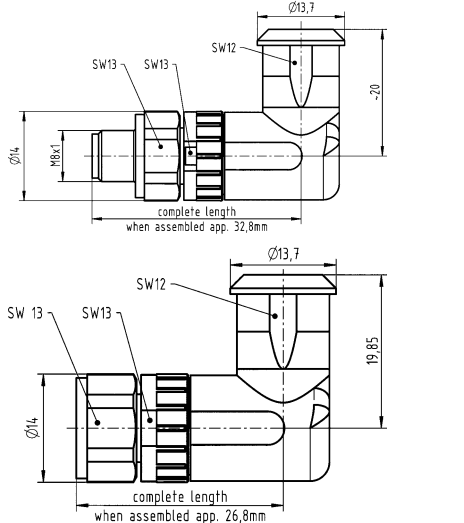
Number of contacts	3
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.09 ... 0.5 mm ²
Conductor cross-section	AWG 28 ... AWG 20

Technical characteristics

Cable diameter	4 ... 5.5 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

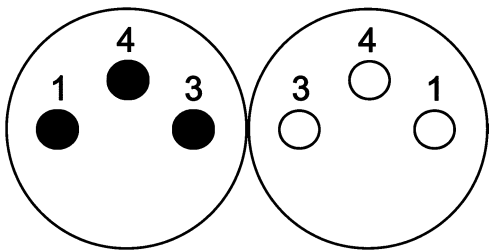
IEC 61076-2-104

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, Cable connector, Straight, Screw termination, Unshielded 	0.09 ... 0.5	21 02 359 1301	21 02 359 2301	
Circular connectors M8, Cable connector, Angled, Screw termination, Unshielded 	0.09 ... 0.5	21 02 359 3301	21 02 359 4301	

Number of contacts

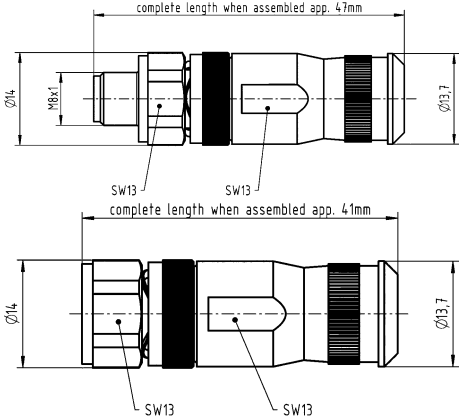
3

Screw termination
Shielded



M8

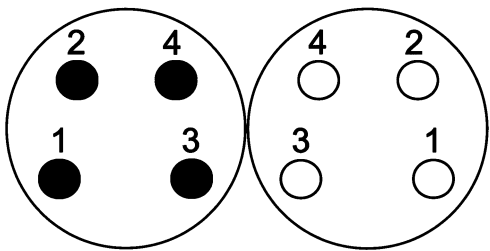
Technical characteristics		Technical characteristics	
Number of contacts	3	Cable diameter	4 ... 5.5 mm
Rated current	4 A	Tightening torque	0.4 Nm
Rated voltage	60 V	Material (insert)	Polyamide (PA)
Rated impulse voltage	1.5 kV	Material (hood/housing)	Copper-zinc alloy
Pollution degree	3	Material (contacts)	Brass
Insulation resistance	>10 ⁸ Ω	Surface (contacts)	Gold plated
Contact resistance	≤10 mΩ	RoHS	compliant with exemption
Mating cycles	≥100	Specifications and approvals	
Locking type	Screw locking		
Degree of protection acc. to IEC 60529	IP67, in locked position	IEC 61076-2-104	
Conductor cross-section	0.09 ... 0.5 mm ²		
Conductor cross-section	AWG 28 ... AWG 20		

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, Cable connector, Straight, Screw termination, Shielded 	0.09 ... 0.5	21 02 369 1301	21 02 369 2301	

Number of contacts

4

HARAX® connection technology
Unshielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.14 ... 0.34 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

Cable diameter	2.5 ... 5.1 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

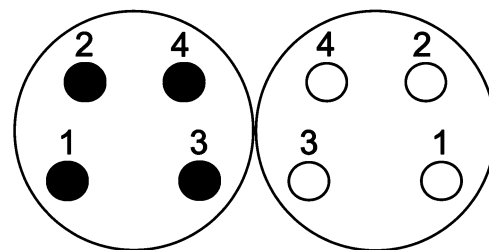
Specifications and approvals

IEC 61076-2-104
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, M8-S, Cable connector, Straight, HARAX® connection technology, Unshielded	0.14 ... 0.34	21 02 151 1405	21 02 151 2405	

Number of contacts

4

Screw termination
Unshielded

M8

Technical characteristics

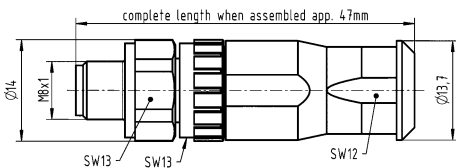
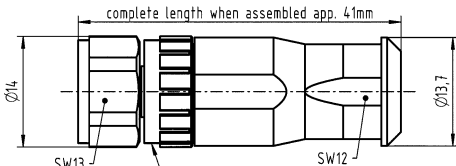
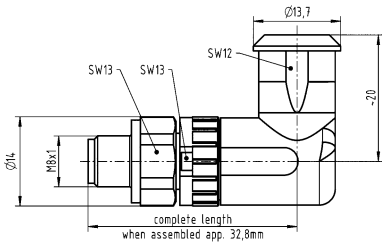
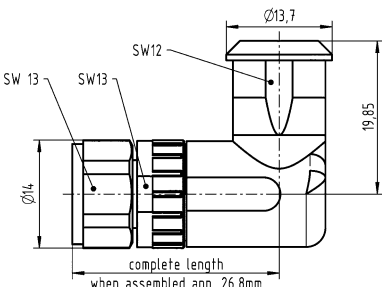
Number of contacts	4
Rated current	4 A
Rated voltage	30 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.09 ... 0.5 mm ²
Conductor cross-section	AWG 28 ... AWG 20

Technical characteristics

Cable diameter	4 ... 5.5 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-104

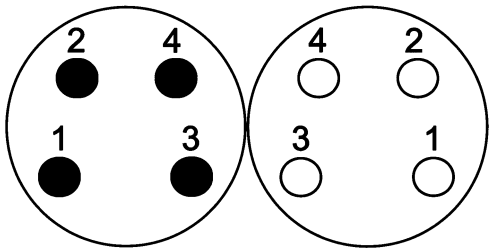
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, Cable connector, Straight, Screw termination, Unshielded 	0.09 ... 0.5	21 02 359 1401	21 02 359 2401	 
Circular connectors M8, Cable connector, Angled, Screw termination, Unshielded 	0.09 ... 0.5	21 02 359 3401	21 02 359 4401	 



Number of contacts

4

Screw termination
Shielded



Technical characteristics

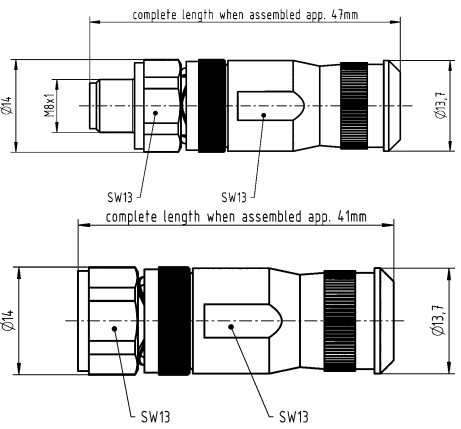
Number of contacts	4
Rated current	4 A
Rated voltage	30 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, in locked position
Conductor cross-section	0.09 ... 0.5 mm ²
Conductor cross-section	AWG 28 ... AWG 20

Technical characteristics

Cable diameter	4 ... 5.5 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Copper-zinc alloy
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

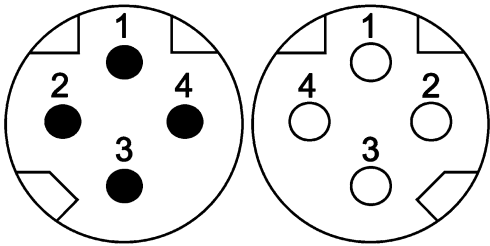
IEC 61076-2-104

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M8, Cable connector, Straight, Screw termination, Shielded 	0.09 ... 0.5	21 02 369 1401	21 02 369 2401	

Number of contacts

4

HARAX® connection technology
Shielded



M8

Technical characteristics

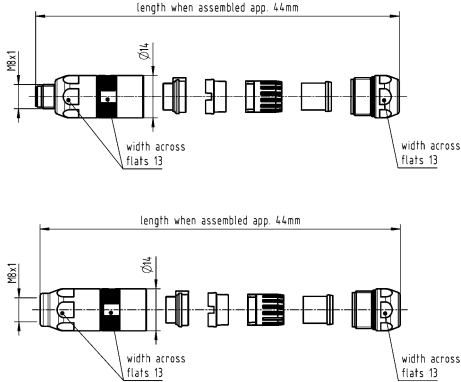
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, in locked position
Cable diameter	6.2 ... 6.8 mm

Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-114

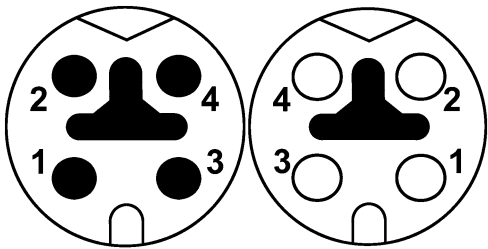
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M8, Cable connector, Straight, HARAX® connection technology, Shielded, Screw locking	21 02 185 1405	21 02 185 2405	
Circular connectors M8, Cable connector, Straight, HARAX® connection technology, Shielded, PushPull locking	21 02 185 1430		



Number of contacts

4

HARAX® connection technology
Shielded



Technical characteristics

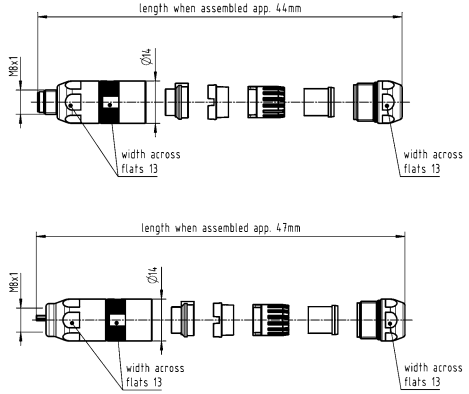
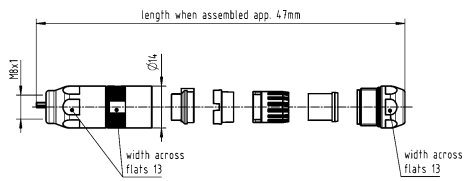
Number of contacts	4
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, in locked position
Cable diameter	6.2 ... 6.8 mm

Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-114

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M8, Cable connector, Straight, HARAX® connection technology, Shielded, Screw locking 	21 02 145 1405	21 02 145 2405	
Circular connectors M8, Cable connector, Straight, HARAX® connection technology, Shielded, PushPull locking 	21 02 145 1430		


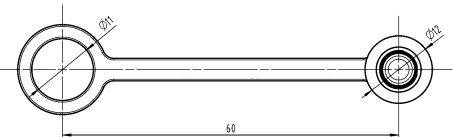
M8

Technical characteristics

Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black
RoHS compliant

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M8, Cap, for male inserts, with cord	21 41 000 0003	
Circular connectors M8, Cap, for female inserts, with cord	21 41 000 0004	

M8

Technical characteristics

Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black, Grey, Transparent
RoHS compliant

Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
----------------	---------------------	-------------	-------------------------------

Circular connectors M8,
M8-XS,
Seal,
Black



1.9 ... 2.5

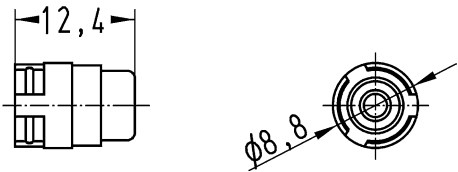
21 01 010 2016

Circular connectors M8,
M8-XS,
Seal,
Grey



2.5 ... 3.5

21 01 010 2008



Circular connectors M8,
M8-XS,
Seal,
Transparent



4.2 ... 5.4

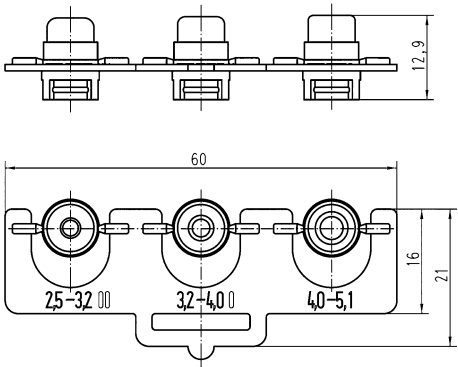
21 01 010 2005

Circular connectors M8,
M8-S,
Set of seals



2.5 ... 5.1

21 01 010 2013





Contents

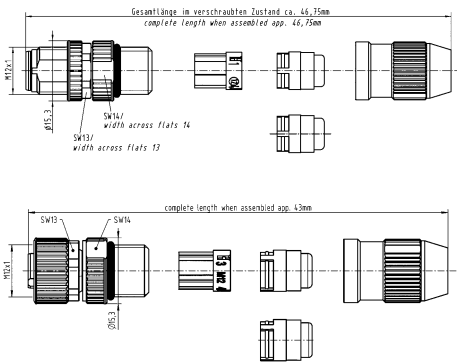
Page

M12.....	C03 12.2
preLink® M12.....	C03 12.32
M12 Slim Design	C03 12.40
M12 PushPull	C03 12.60
M12 Power	C03 12.74
Adapter	C03 12.82
Accessories	C03 12.87

3

Cable diameter	2.9 ... 5.1 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant

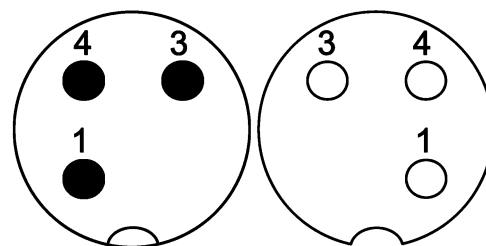
IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-S, Cable connector, Straight, HARAX® connection technology, Unshielded 	0.14 ... 0.34	21 03 111 1305	21 03 111 2305	

Number of contacts

3

HARAX® connection technology
Unshielded



M12

Technical characteristics

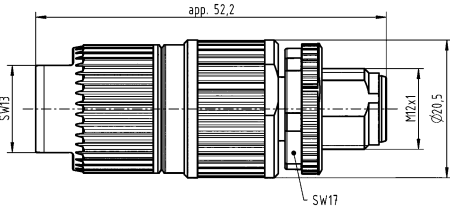
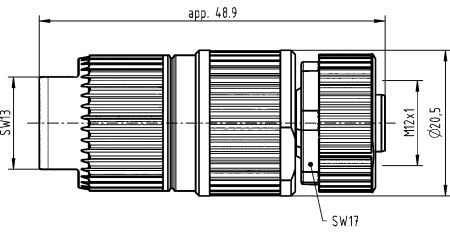
Number of contacts	3
Rated current	6 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤2.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 ... 0.75 mm ²
Conductor cross-section	AWG 22 ... AWG 18

Technical characteristics

Cable diameter	6 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

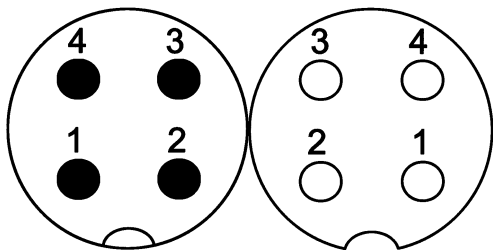
IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, Deviating contact configuration, 1, 3, 4, HARAX® connection technology, Unshielded 	0.34 ... 0.75	21 03 212 1306	21 03 212 2306	
Circular connectors M12, M12-L, Cable connector, Straight, Deviating contact configuration, 3, 4, 5, HARAX® connection technology, Unshielded 	0.34 ... 0.75	21 03 212 1400	21 03 212 2400	

Number of contacts

4

HARAX® connection technology
Unshielded



Technical characteristics

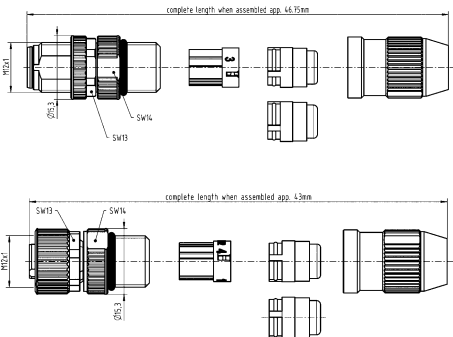
Number of contacts	4
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.34 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

Cable diameter	2.9 ... 5.1 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

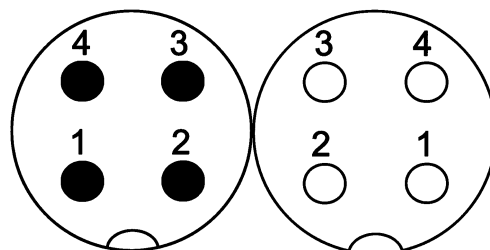
IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-S, Cable connector, Straight, HARAX® connection technology, Unshielded, 	0.14 ... 0.34	21 03 111 1405	21 03 111 2405	

Number of contacts

4

HARAX® connection technology
Unshielded



M12

Technical characteristics

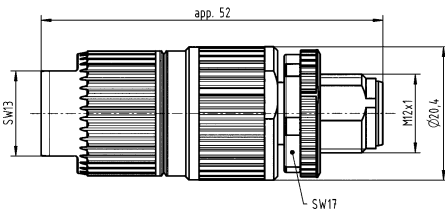
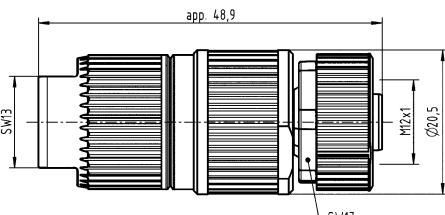
Number of contacts	4
Rated current	6 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Wire outer diameter	$\leq 2.6 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 ... 0.75 mm ²
Conductor cross-section	AWG 22 ... AWG 18

Technical characteristics

Cable diameter	6 ... 8 mm, 7 ... 8.8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

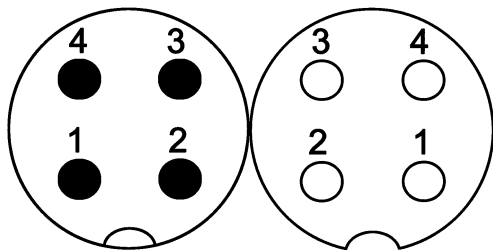
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded 	0.34 ... 0.75	21 03 212 1305	21 03 212 2305	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded, Cable-Ø 7 ... 8.8 mm 	0.34 ... 0.75	21 03 212 1407	21 03 212 2407	



Number of contacts

4

HARAX® connection technology
Unshielded



Technical characteristics

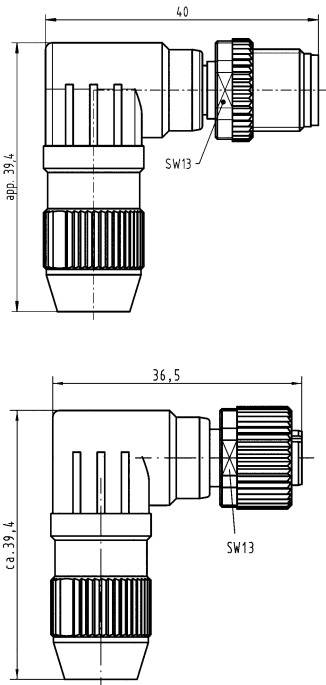
Number of contacts	4
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.25 ... 0.5 mm ²
Conductor cross-section	AWG 24 ... AWG 20

Technical characteristics

Cable diameter	4 ... 5.1 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

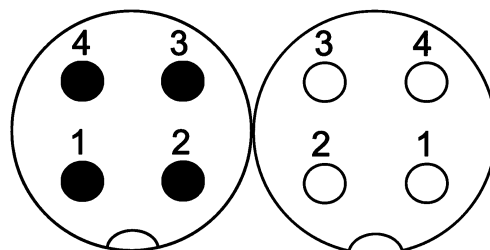
IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Angled, HARAX® connection technology, Unshielded, 	0.25 ... 0.5	21 01 140 5081	21 01 140 5091	

Number of contacts

4

HARAX® connection technology
Shielded



M12

Technical characteristics

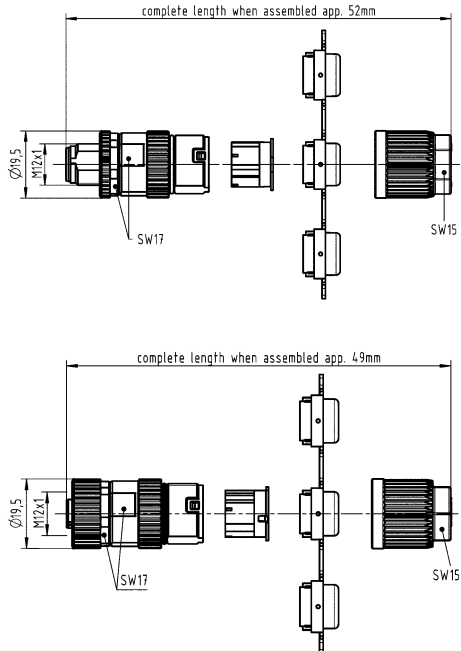
Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.34 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

Cable diameter	4.5 ... 8.8 mm
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded 	0.14 ... 0.34	21 03 221 1405	21 03 221 2405	



M12

Circular connectors M12, M12-L, Cable connector, Panel feed through, for rear mounting, HARAX® connection technology, Shielded



Conductor cross-section (mm²)

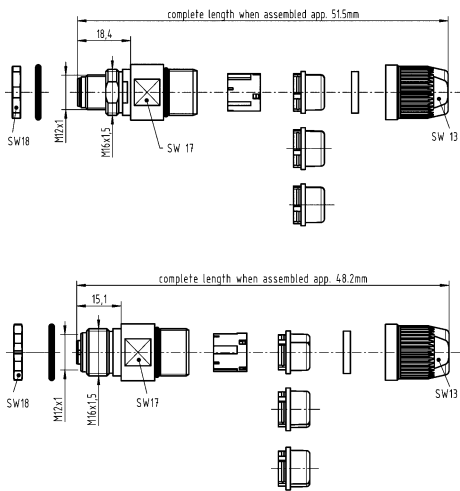
0.14 ... 0.34

Part number
Male Female

21 03 321 1425

21 03 321 2425

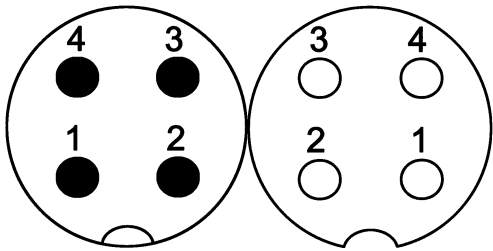
Drawing
(dimensions in mm)



Number of contacts

4

Screw termination
Unshielded



M12

Technical characteristics

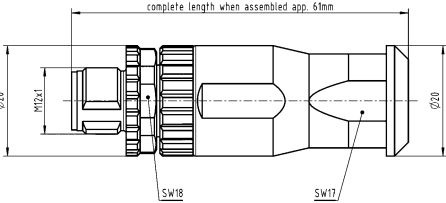
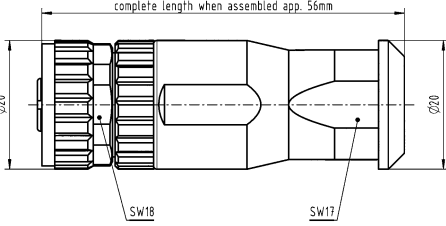
Number of contacts	4
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16

Technical characteristics



Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Unshielded 	1.5 max.	21 03 319 1401	21 03 319 2401	 

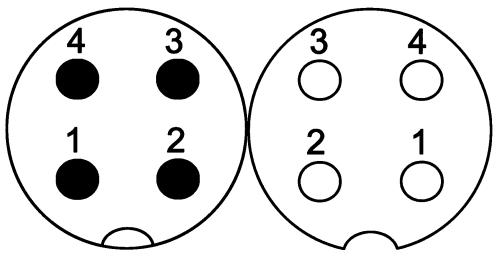


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded 	1.5 max.	21 03 319 3401	21 03 319 4401	 

Number of contacts

4

Screw termination
Shielded



M12

Technical characteristics

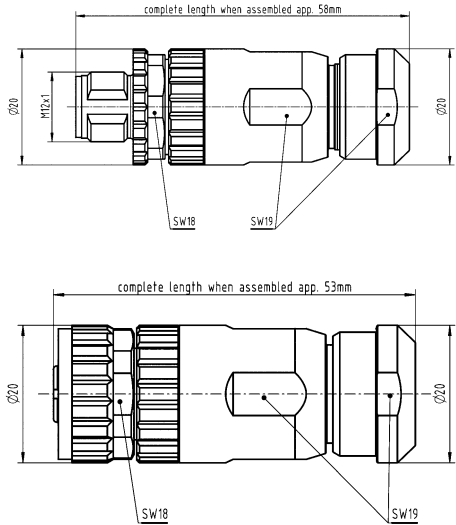
Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16

Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

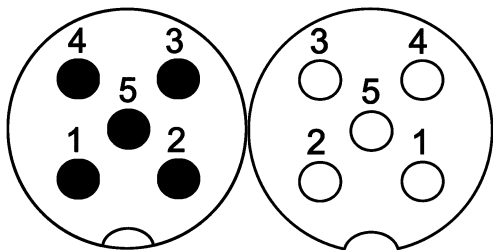
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded 	1.5 max.	21 03 329 1401	21 03 329 2401	



Number of contacts

5

HARAX® connection technology
Unshielded



Technical characteristics

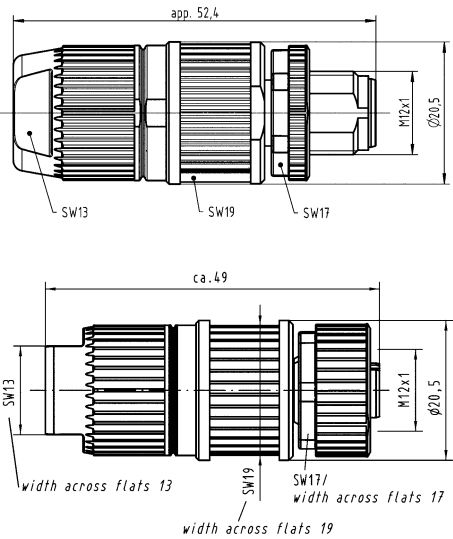
Number of contacts	5
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤2 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 ... 0.5 mm ²
Conductor cross-section	AWG 22 ... AWG 20

Technical characteristics

Cable diameter	6 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

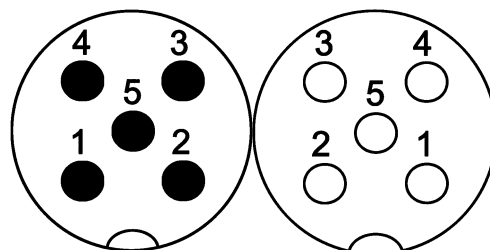
Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded 	0.34 ... 0.5	21 03 272 1505	21 03 272 2505	

Number of contacts

5

Crimp termination
Shielded

M12

Technical characteristics

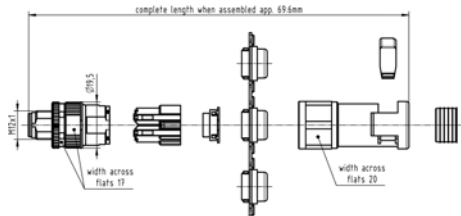
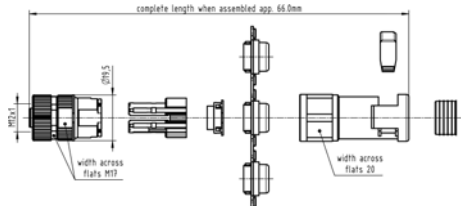
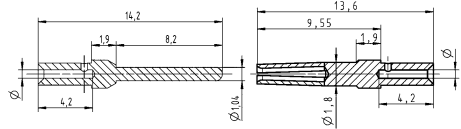
Number of contacts	5
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Wire outer diameter	$\leq 2.3 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.75 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²

Technical characteristics

Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18
Cable diameter	4.5 ... 8.8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

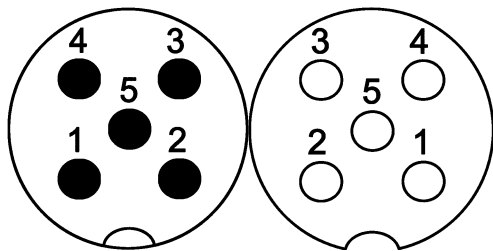
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Circular connectors M12, Cable connector, with conduit, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 ... 0.75	21 03 812 1511	21 03 812 2511	 															
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm²	0.64 mm	4 mm																	
0.13-0.33 mm²	0.88 mm	4 mm																	
0.25-0.52 mm²	1.13 mm	4 mm																	
0.33-0.82 mm²	1.34 mm	4 mm																	



Number of contacts

5

Screw termination
Unshielded



Technical characteristics

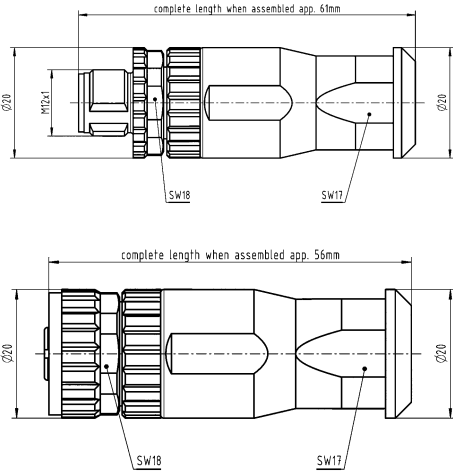
Number of contacts	5
Rated current	7.5 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16

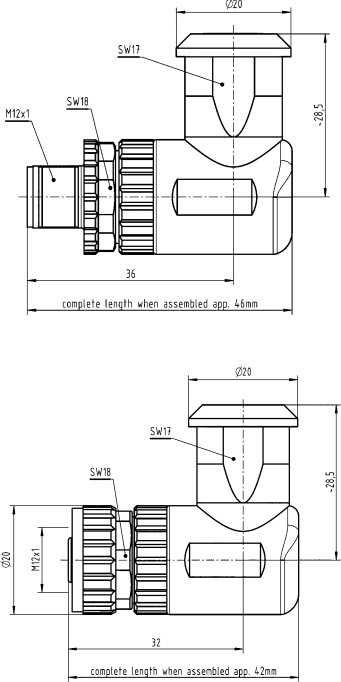
Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-101

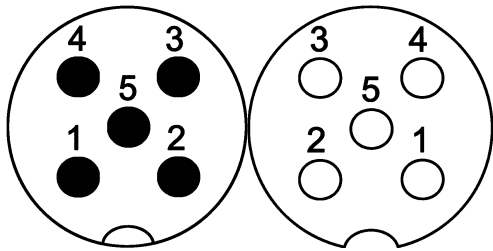
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Unshielded 	1.5 max.	21 03 319 1501	21 03 319 2501	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded 	1.5 max.	21 03 319 3501	21 03 319 4501	

Number of contacts

5

Screw termination
Shielded



Technical characteristics

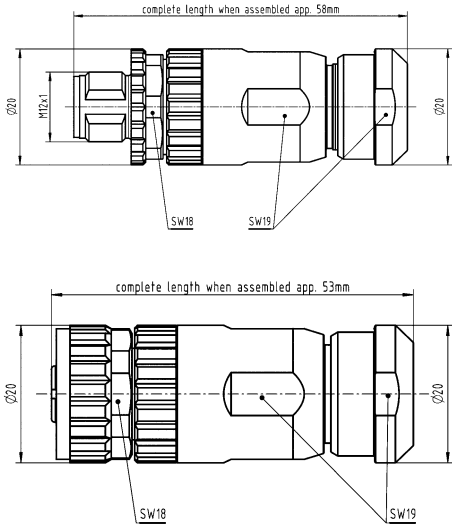
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16

Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

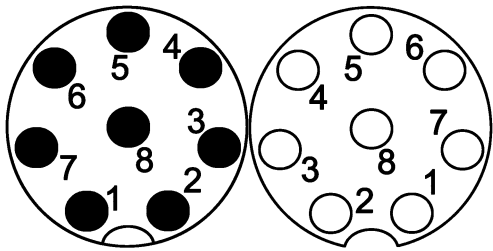
IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded 	1.5 max.	21 03 329 1501	21 03 329 2501	

Number of contacts

8

IDC termination
Shielded



M12

Technical characteristics

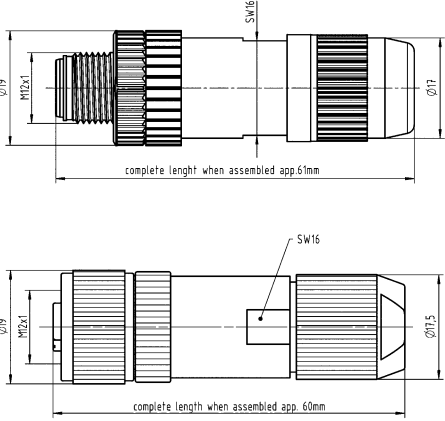
Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.34 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.4 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

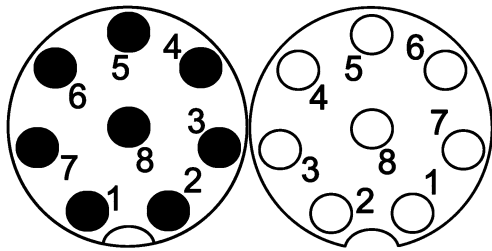
IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, IDC termination, Shielded 	0.14 ... 0.34	21 03 121 1801	21 03 121 2801	

Number of contacts

8

Screw termination
Unshielded



Technical characteristics

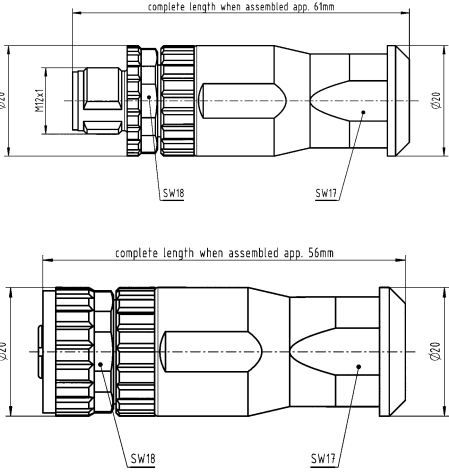
Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.5 mm ² max.
Conductor cross-section	AWG 20

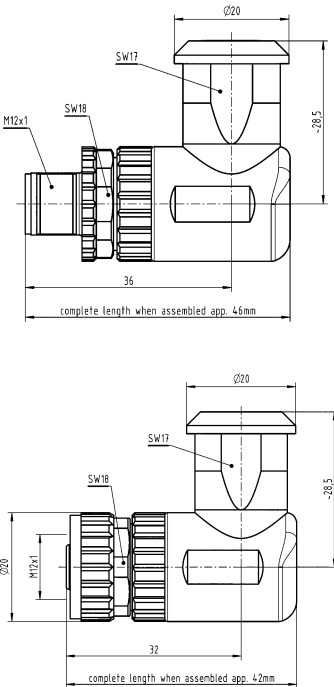
Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Polyamide (PA), Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Unshielded 	0.5 max.	21 03 319 1801	21 03 319 2801	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded	0.5 max.	21 03 319 3801	21 03 319 4801	

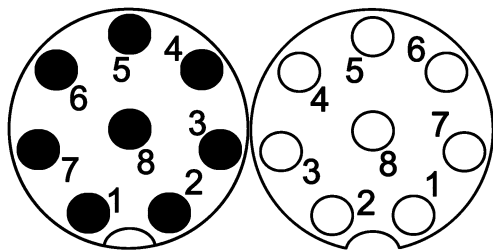
M12



Number of contacts

8

Screw termination
Shielded



Technical characteristics

Number of contacts	8
Rated current	2 A
Rated voltage	30 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	0.5 mm ² max.
Conductor cross-section	AWG 20

Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

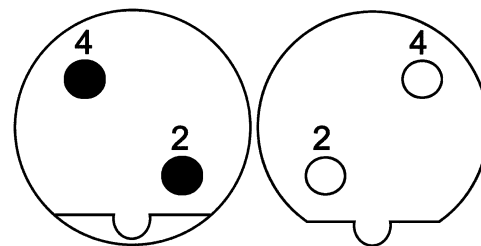
IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded	0.5 max.	21 03 329 1801	21 03 329 2801	

Number of contacts

2

HARAX® connection technology
Shielded



M12

Technical characteristics

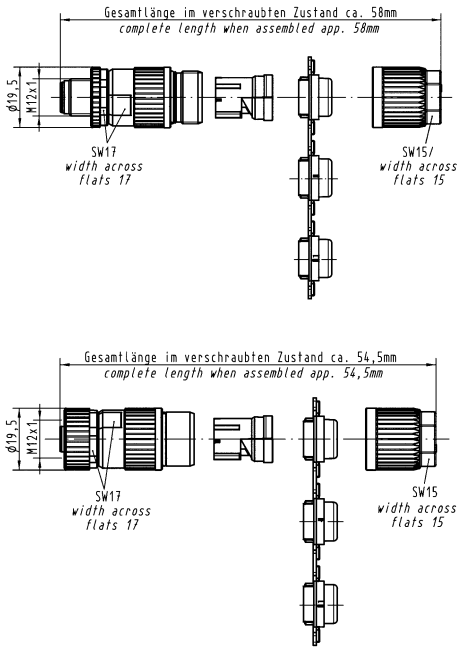
Number of contacts	2
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Wire outer diameter	$\leq 2.6 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.25 ... 0.34 mm ²
Conductor cross-section	AWG 24 ... AWG 22

Technical characteristics

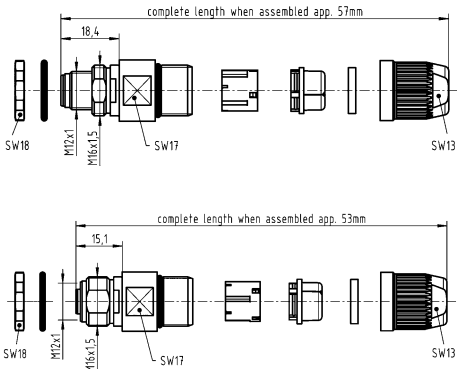
Cable diameter	4.5 ... 8.8 mm, 7 ... 8.8 mm
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

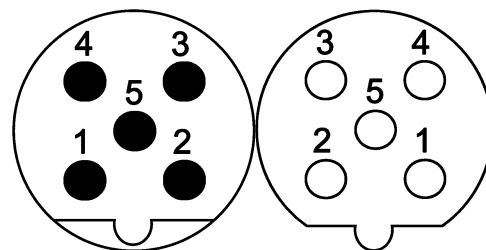
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded 	0.25 ... 0.34	21 03 241 1301	21 03 241 2301	



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Panel feed through, for rear mounting, HARAX® connection technology, Shielded, Cable-Ø 7 ... 8.8 mm 	0.25 ... 0.34	21 03 341 1425	21 03 341 2425	

Number of contacts

5

Crimp termination
Shielded

M12

Technical characteristics

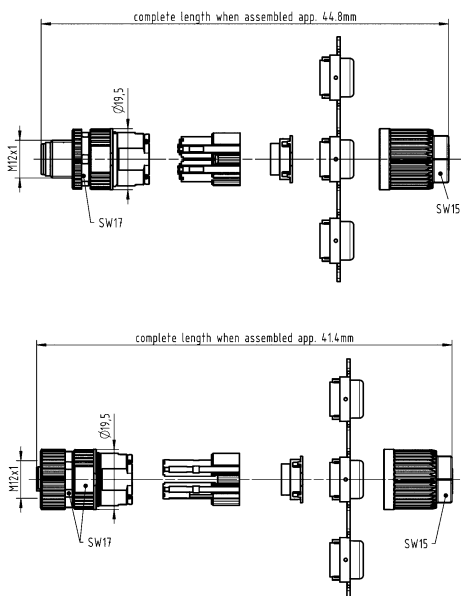
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Wire outer diameter	$\leq 2.3 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.75 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²

Technical characteristics

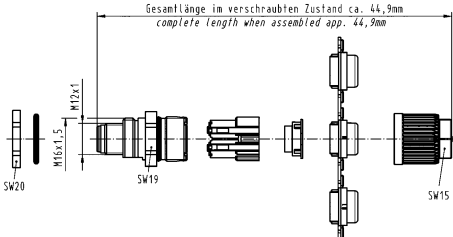
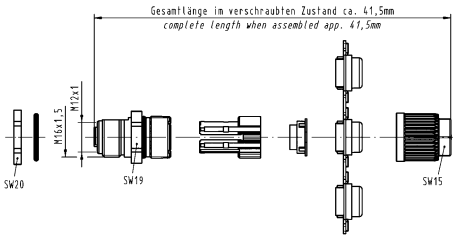

Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18
Cable diameter	4.5 ... 8.8 mm
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 ... 0.75	21 03 841 1505	21 03 841 2505	

M12

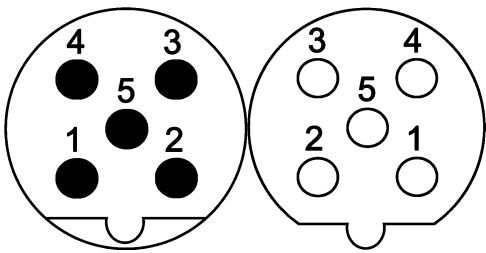
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Circular connectors M12, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 ... 0.75	21 03 841 1525	21 03 841 2525	 															
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm²	0.64 mm	4 mm																	
0.13-0.33 mm²	0.88 mm	4 mm																	
0.25-0.52 mm²	1.13 mm	4 mm																	
0.33-0.82 mm²	1.34 mm	4 mm																	



Number of contacts

5

Screw termination
Shielded



M12

Technical characteristics

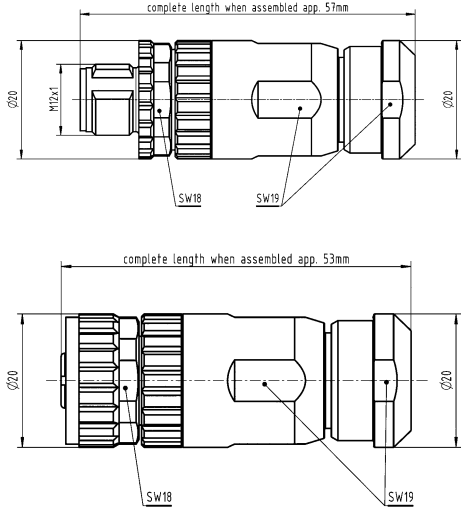
Number of contacts	5
Rated current	4 A
Rated voltage	60 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16

Technical characteristics

Cable diameter	4 ... 8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

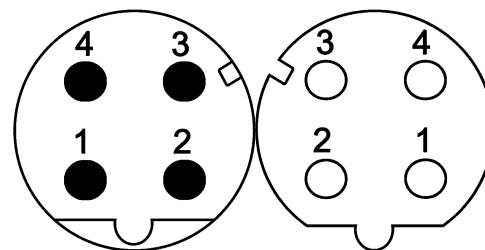
IEC 61076-2-101

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded 	1.5 max.	21 03 349 1501	21 03 349 2501	

Number of contacts

4

HARAX® connection technology
Shielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Wire outer diameter	$\leq 2 \text{ mm}$
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.34 mm ² , 0.34 ... 0.75 mm ²
Conductor cross-section	AWG 26 ... AWG 22, AWG 22 ... AWG 18
Cable diameter	4.5 ... 8.8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Polyamide (PA)

Technical characteristics

Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

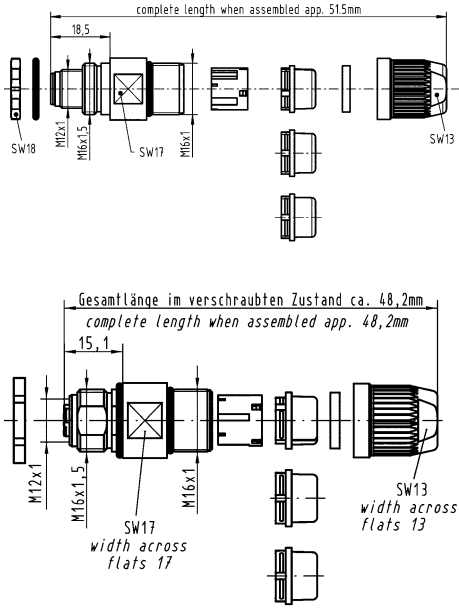
IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079



Details

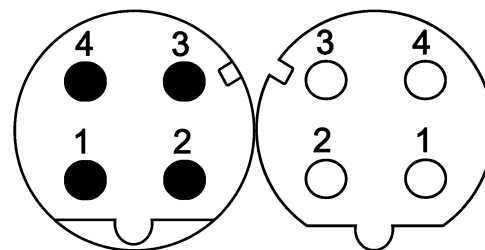
For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded 	0.14 ... 0.34 0.34 ... 0.75	21 03 281 1405 21 03 282 1405	21 03 281 2405 21 03 282 2405	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, M12-L, Cable connector, Panel feed through, for rear mounting, HARAX® connection technology, Shielded 	0.14 ... 0.34	21 03 381 1425	21 03 381 2425	

Number of contacts

4

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤2.3 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.14 ... 0.75 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²
Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18

Technical characteristics

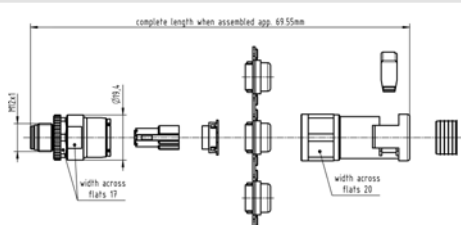
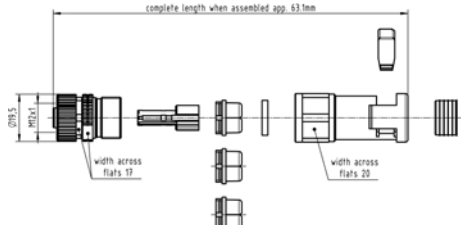
Cable diameter	4.5 ... 8.8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant with exemption

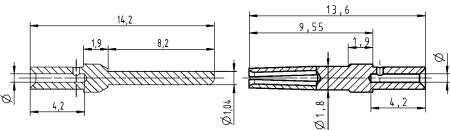
Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Details

For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, with conduit, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 ... 0.75	21 03 882 1411	21 03 882 2411	 

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
D-Sub, Standard, Crimp contact, Turned contacts	0.09 ... 0.25	09 67 000 7576	09 67 000 7476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm
	Wire gauge	Ø	Stripping length																
	0.09-0.25 mm²	0.64 mm	4 mm																
	0.13-0.33 mm²	0.88 mm	4 mm																
	0.25-0.52 mm²	1.13 mm	4 mm																
0.33-0.82 mm²	1.34 mm	4 mm																	
0.13 ... 0.33	09 67 000 5576	09 67 000 5476																	
0.25 ... 0.52	09 67 000 8576	09 67 000 8476																	
0.33 ... 0.82	09 67 000 3576	09 67 000 3476																	

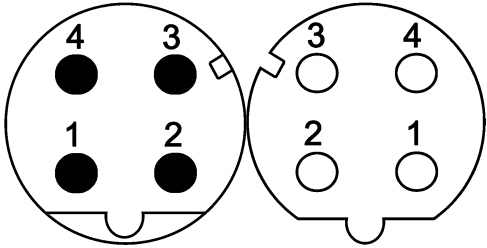


M12

Number of contacts

4

Screw termination
Shielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP67, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16
Cable diameter	4 ... 8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm

Technical characteristics

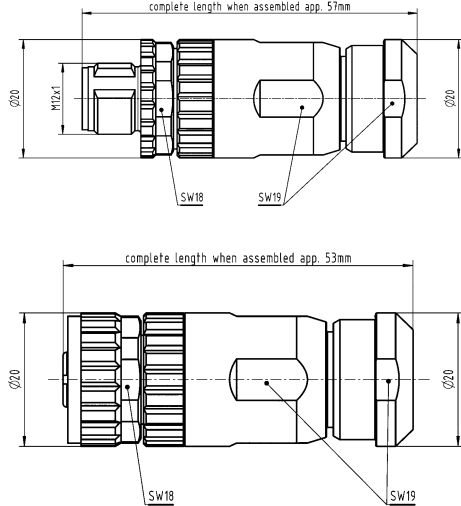
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101

Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded, IP67 	1.5 max.	21 03 389 1402	21 03 389 2402	

Number of contacts

4

Screw termination
Shielded



M12

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	250 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65, when mated
Conductor cross-section	1.5 mm ² max.
Conductor cross-section	AWG 16
Cable diameter	4.5 ... 8.3 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm

Technical characteristics

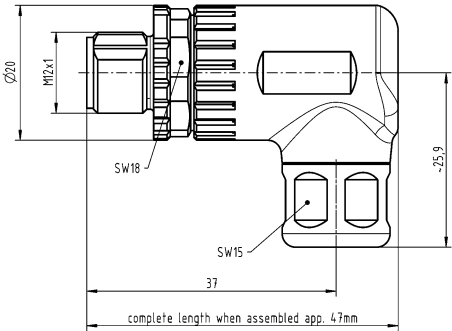
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Brass
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-101
UL 1977 ECBT2.E102079
CSA-C22.2 No. 182.3 ECBT8.E102079

Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Angled, Screw termination, Shielded, IP65 	1.5 max.	21 43 786 3401	

Number of contacts

4

preLink® IDC insulation displacement termination
Shielded



Technical characteristics

Number of contacts	4
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
RoHS	compliant with exemption

Specifications and approvals

UL 1863 DUXR2.E470046
CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046
DNV GL



Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Screw mounted housing, Cable connector, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately	0.1 ... 0.12, 0.22 ... 0.32	20 82 005 0001	

Number of contacts

4

preLink® IDC insulation displacement termination
Shielded



M12

Technical characteristics

Number of contacts	4
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (insert)	Zinc die-cast, nickel-plated
Material (hood/housing)	Zinc die-cast
RoHS	compliant with exemption, compliant

Specifications and approvals

UL 1863 DUXR2.E470046
CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046
DNV GL



Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Connector insert, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately Please order screw mounted housing separately.	0.1 ... 0.12, 0.22 ... 0.32	20 82 005 1214	
preLink®, Circular connectors M12, Screw mounted housing, Empty housing 	0.1 ... 0.12, 0.22 ... 0.32	20 82 000 1210	

Number of contacts

4

preLink® IDC insulation displacement termination
Shielded



Features

- Ethernet data connector suitable for industry
- Robust design
- 360° shielding
- Category of transmission Cat. 5
- Suitable for termination of massive and flexible wires
- Suitable for all PoE versions
- Very fast preLink® termination technology

Technical characteristics

Number of contacts	4
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Data rate	10 Mbit/s, 100 Mbit/s
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
RoHS	compliant with exemption

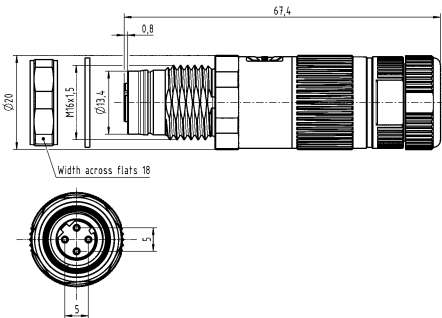
Specifications and approvals

IEC 61076-2-101
DNV GL



Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Cable connector, Panel feed through, for rear mounting, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately	0.1 ... 0.12, 0.22 ... 0.32	20 82 005 2001	

Number of contacts

8

preLink® IDC insulation displacement termination
Shielded



M12

Technical characteristics

Number of contacts	8
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated

Technical characteristics

RoHS compliant with exemption

Specifications and approvals

UL 1863 DUXR2.E470046
CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046
DNV GL



Details


For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Screw mounted housing, Cable connector, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately	0.1 ... 0.12, 0.22 ... 0.32	20 82 005 0002	

Number of contacts

8

preLink® IDC insulation displacement termination
Shielded



Technical characteristics

Number of contacts	8
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s
Material (insert)	Zinc die-cast, nickel-plated
Material (hood/housing)	Zinc die-cast

Technical characteristics

RoHS	compliant with exemption, compliant
------	--

Specifications and approvals

UL 1863 DUXR2.E470046
CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046
DNV GL



Details


For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Connector insert, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately Please order screw mounted housing separately.	0.1 ... 0.12, 0.22 ... 0.32	20 82 006 1218	
preLink®, Circular connectors M12, Screw mounted housing, Empty housing 	0.1 ... 0.12, 0.22 ... 0.32	20 82 000 1210	

Number of contacts

8

preLink® IDC insulation displacement termination
Shielded



M12

Features

- Ethernet data connector suitable for industry
- Robust design
- 360° shielding
- Category of transmission Cat. 6A
- Suitable for termination of massive and flexible wires
- Suitable for all PoE versions
- Very fast preLink® termination technology

Technical characteristics

Number of contacts	8
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65, IP67
Conductor cross-section	0.1 ... 0.12 mm², 0.22 ... 0.32 mm²
Conductor cross-section	AWG 27 ... AWG 26, AWG 24 ... AWG 22
Cable diameter	5 ... 9.5 mm
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Data rate	10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
RoHS	compliant with exemption

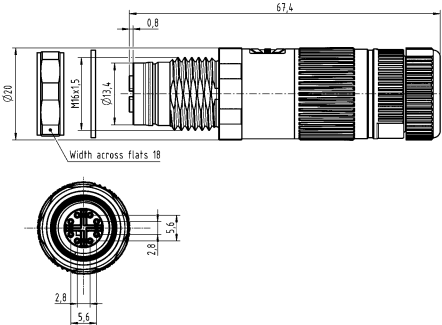
Specifications and approvals

IEC 61076-2-109
DNV GL



Details

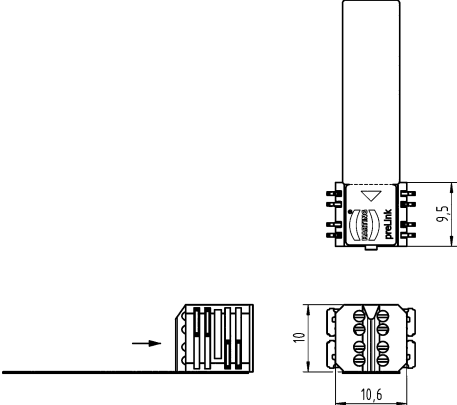
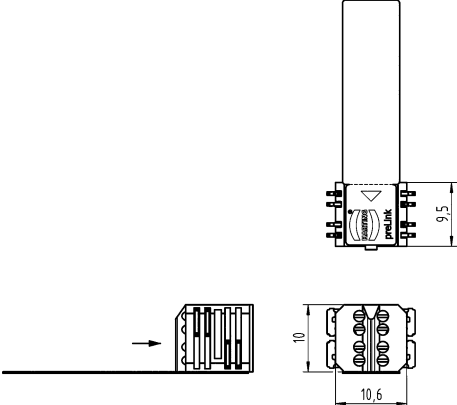
For Ethernet applications up to 10 Gbit only

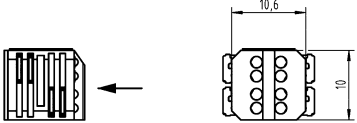
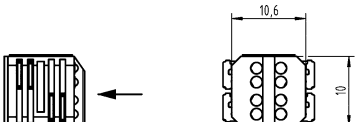
Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Cable connector, Panel feed through, for rear mounting, preLink® IDC insulation displacement termination, Shielded  Please order terminal module separately	0.1 ... 0.12, 0.22 ... 0.32	20 82 006 2001	

preLink® IDC insulation displacement termination



Technical characteristics		Specifications and approvals	
Limiting temperature	-40 ... +85 °C	DNV GL	UL 1863 DUXR2.E470046 CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046 
Mating cycles	≥10	UL 1863 DUXR2.E470046	
Wire outer diameter	1.3 ... 1.6 mm, 0.8 ... 1.1 mm	CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046	
Conductor cross-section	0.22 ... 0.32 mm², 0.1 ... 0.12 mm²		
Conductor cross-section	AWG 24 ... AWG 22, AWG 27 ... AWG 26		
Colour (insert)	Yellow, White, Black		
RoHS	compliant		

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
preLink®, Terminal module, 8-pins, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 10 pieces 	0.22 ... 0.32	20 82 000 0001	
preLink®, Terminal module, 8-pins, preLink® IDC insulation displacement termination, Conductor diameter 0.8 - 1.1 mm, Pack contents: 10 pieces 	0.1 ... 0.12	20 82 000 0003	

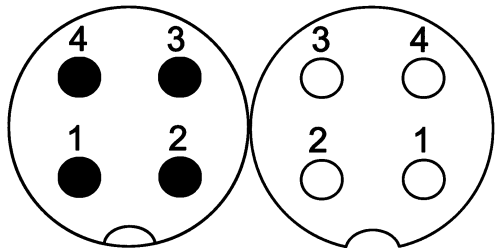
Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
preLink®, Terminal module, 4-pin, AIDA compliant, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 10 pieces 	0.22 ... 0.32	20 82 000 0005	 
preLink®, Terminal module, 4-pin, AIDA compliant, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 100 pieces 	0.22 ... 0.32	20 82 000 0005 XL	 



Number of contacts

4

HARAX® connection technology
Shielded



Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 mm ² , 0.14 mm ²
Conductor cross-section	AWG 22, AWG 26

Technical characteristics

Cable diameter	5.7 ... 8.8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

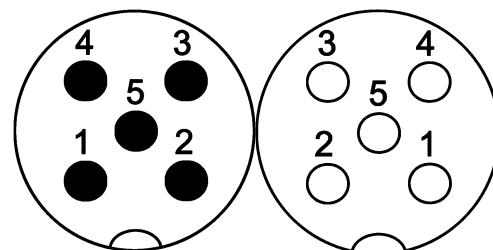
IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, HARAX® connection technology, Shielded	0.14	21 03 322 1410	21 03 322 2410	
	0.34	21 03 322 1400	21 03 322 2400	



Number of contacts

5

Crimp termination
Shielded

M12

Technical characteristics

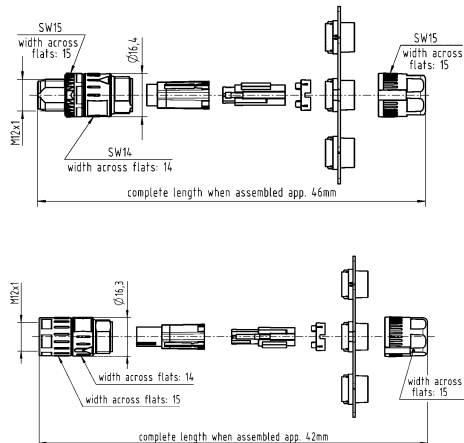
Number of contacts	5
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Wire outer diameter	$\leq 2.3 \text{ mm}$
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.82 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²

Technical characteristics

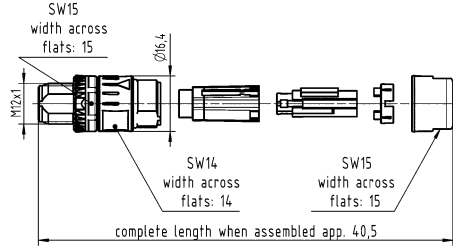
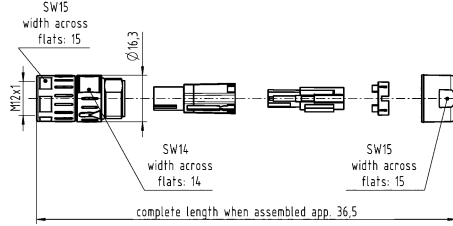
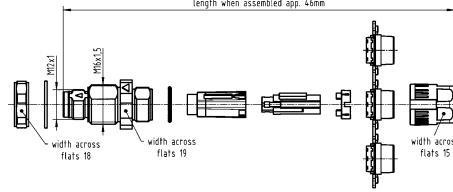
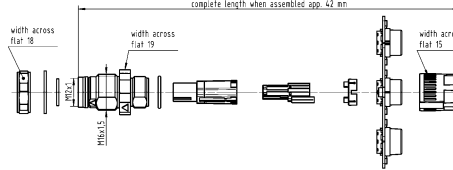
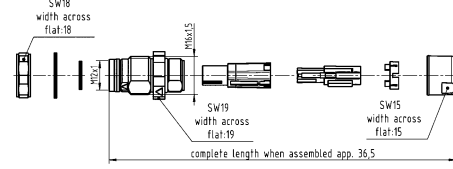
Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18
Cable diameter	5.7 ... 8.8 mm
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant, compliant with exemption

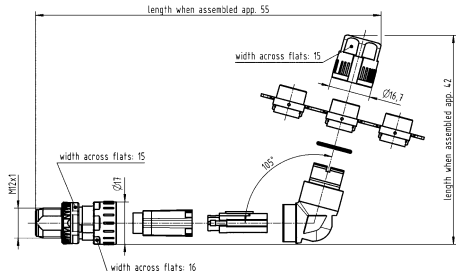
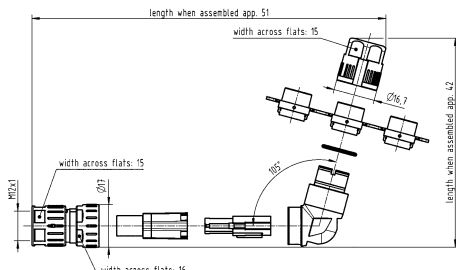
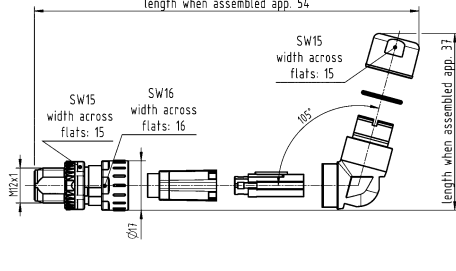
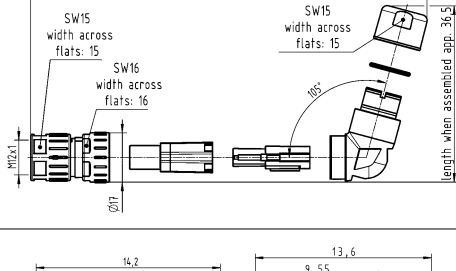
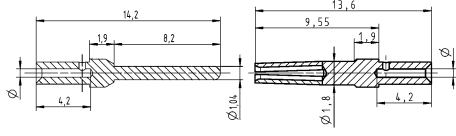
Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 821 1505	21 03 821 2505	

M12

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 821 1507	21 03 821 2507	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 821 1525	21 03 821 2525	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82		21 03 821 2527	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 821 3505	21 03 821 4505	 															
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 821 3507	21 03 821 4507	 															
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm²	0.64 mm	4 mm																	
0.13-0.33 mm²	0.88 mm	4 mm																	
0.25-0.52 mm²	1.13 mm	4 mm																	
0.33-0.82 mm²	1.34 mm	4 mm																	



M12

Circular connectors M12,
Slim Design,
Crimp flange set



HARTING offers to test and
define the best crimp flange and
ferrule combination for customer
specific cables.

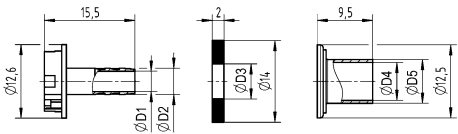
Conductor
cross-section
(mm²)

Part number
Male Female

Drawing
(dimensions in mm)

21 01 010 00xx

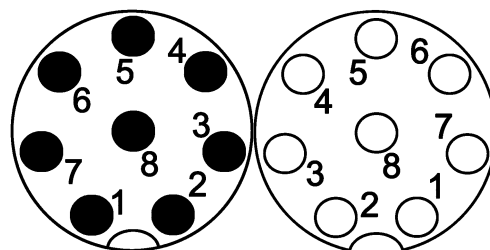
21 01 010 00xx



	D1	D2	D3	D4	D5
21 01 010 0017	3.5	4.5	6.0	6.5	7.5
21 01 010 0018	4.5	5.5	6.6	7.5	8.5
21 01 010 0019	4.5	5.5	6.8	8.0	9.0
21 01 010 0020	5.0	6.0	7.8	9.0	10.0
21 01 010 0021	6.5	7.5	8.0	10.0	10.8
21 01 010 0022	5.0	6.0	7.4	9.0	10.0
21 01 010 0024	5.5	6.5	8.8	10.0	10.8

Number of contacts

8

Crimp termination
Shielded

M12

Technical characteristics

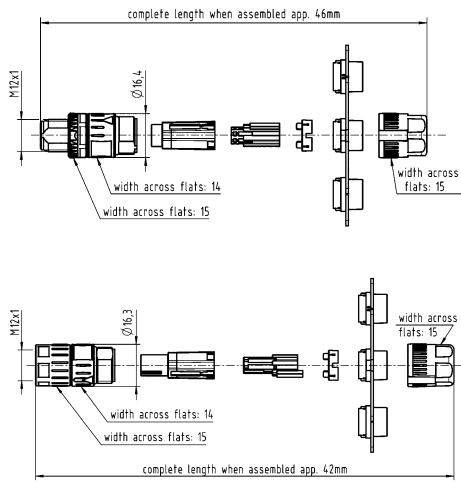
Number of contacts	8
Rated current	2 A
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	30 V AC, 30 V DC
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Wire outer diameter	$\leq 1.65 \text{ mm}$
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.33 mm ²
Conductor cross-section	AWG 26 ... AWG 22
Cable diameter	5.7 ... 8.8 mm

Technical characteristics

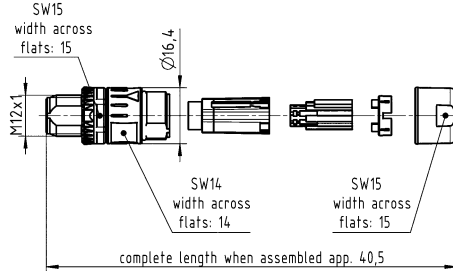
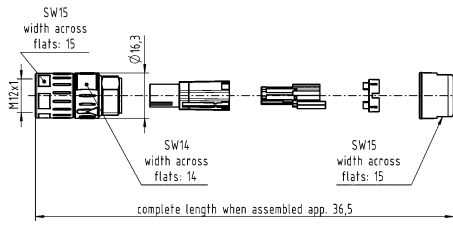
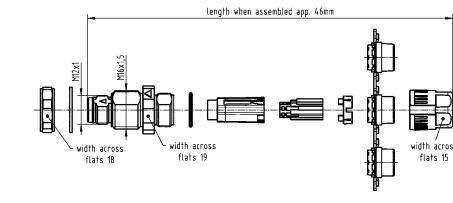
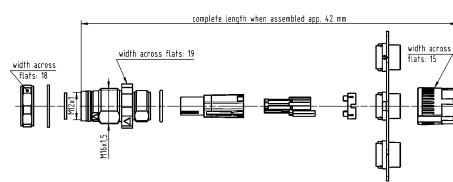
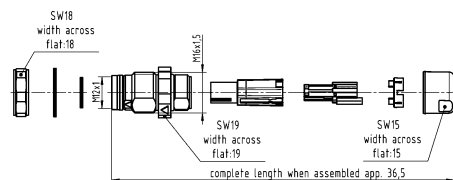
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

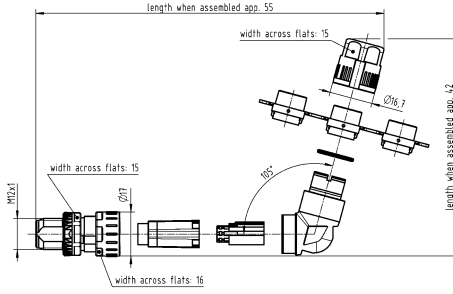
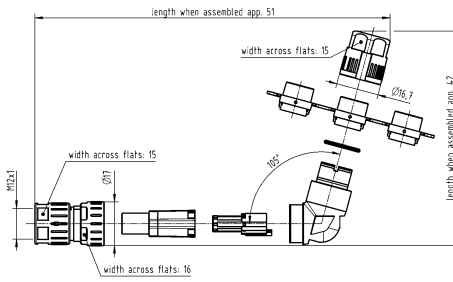
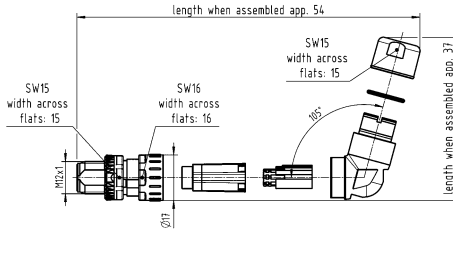
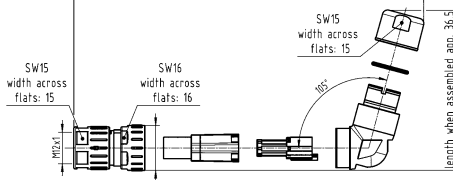
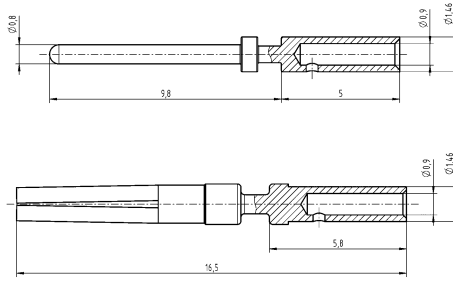
Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.33	21 03 821 1805	21 03 821 2805	

M12

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.33	21 03 821 1807	21 03 821 2807	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.33	21 03 821 1825	21 03 821 2825	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.33		21 03 821 2827	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.33	21 03 821 3805	21 03 821 4805	 
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.33	21 03 821 3807	21 03 821 4807	 
Circular connectors M12, Crimp contact, Turned contacts 	0.13 ... 0.33	21 01 100 9020	21 01 100 9025	

M12

Circular connectors M12,
Slim Design,
Crimp flange set



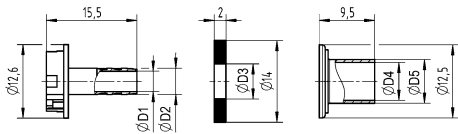
HARTING offers to test and
define the best crimp flange and
ferrule combination for customer
specific cables.

Conductor
cross-section
(mm²)

Part number
Male Female

Drawing
(dimensions in mm)

21 01 010 00xx 21 01 010 00xx

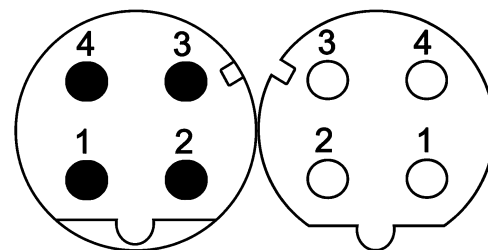


	D1	D2	D3	D4	D5
21 01 010 0017	3.5	4.5	6.0	6.5	7.5
21 01 010 0018	4.5	5.5	6.6	7.5	8.5
21 01 010 0019	4.5	5.5	6.8	8.0	9.0
21 01 010 0020	5.0	6.0	7.8	9.0	10.0
21 01 010 0021	6.5	7.5	8.0	10.0	10.8
21 01 010 0022	5.0	6.0	7.4	9.0	10.0
21 01 010 0024	5.5	6.5	8.8	10.0	10.8

Number of contacts

4

HARAX® connection technology
Shielded



M12

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.6 mm
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 mm ² , 0.14 mm ²
Conductor cross-section	AWG 22, AWG 26
Cable diameter	5.7 ... 8.8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

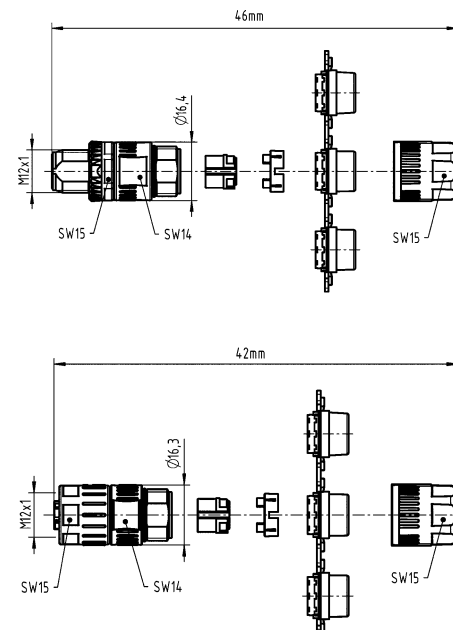
Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



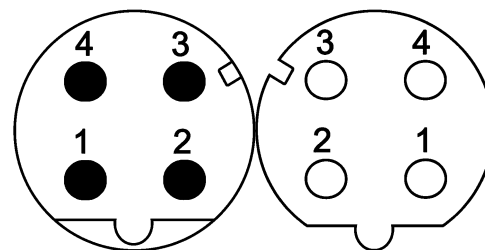
Details

For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, HARAX® connection technology, Shielded	0.14	21 03 382 1410	21 03 382 2410	
	0.34	21 03 382 1400	21 03 382 2400	

Number of contacts

4

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤2.3 mm
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.82 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²
Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18
Cable diameter	5.7 ... 8.8 mm

Technical characteristics

Transmission characteristics	Cat. 5, Class D up to 100 MHz
Tightening torque	0.6 Nm, 2 Nm Lock nut
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant, compliant with exemption

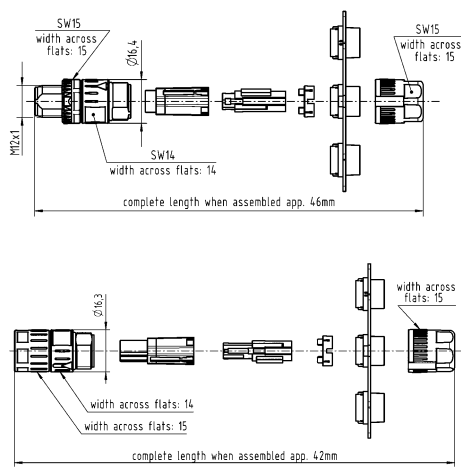
Specifications and approvals

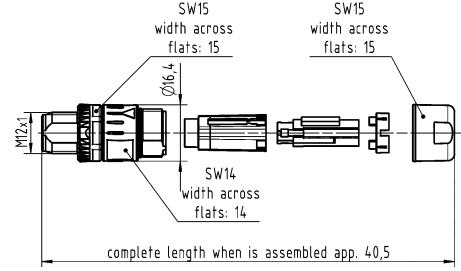
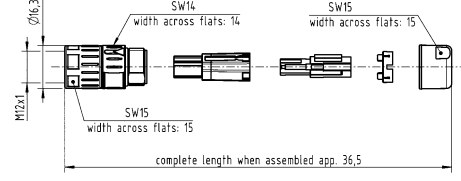
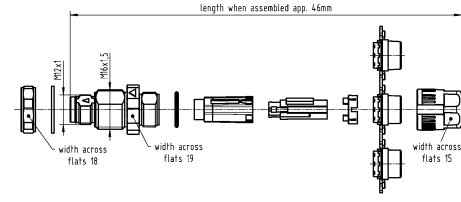
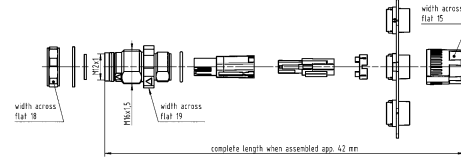
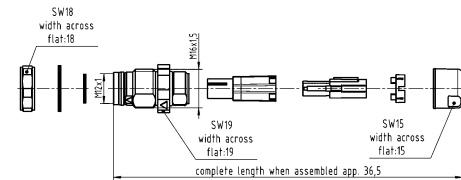
IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

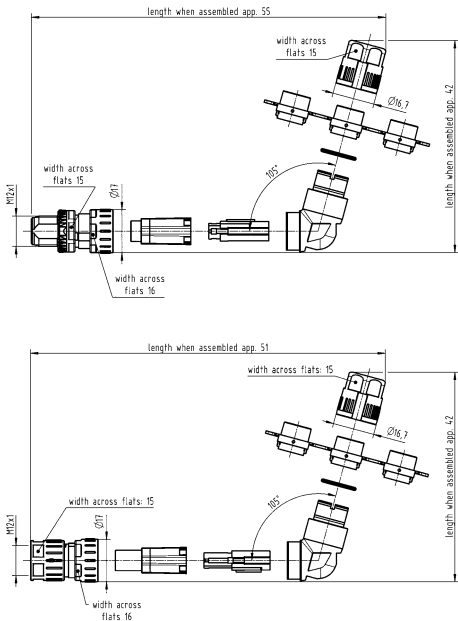
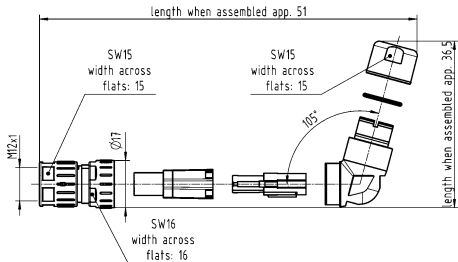
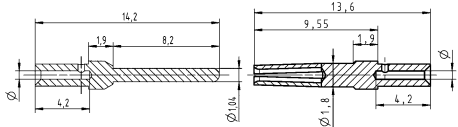


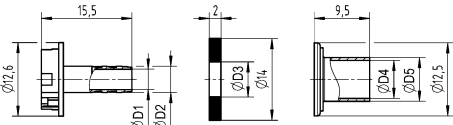
Details

For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 881 1405	21 03 881 2405	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 881 1407	21 03 881 2407	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 881 1426	21 03 881 2425	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82		21 03 881 2427	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 881 3405	21 03 881 4405																
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 881 3407	21 03 881 4407																
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm
Wire gauge	Ø	Stripping length																	
0.09-0.25 mm²	0.64 mm	4 mm																	
0.13-0.33 mm²	0.88 mm	4 mm																	
0.25-0.52 mm²	1.13 mm	4 mm																	
0.33-0.82 mm²	1.34 mm	4 mm																	

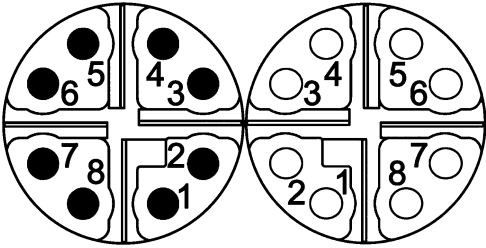
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
Circular connectors M12, Slim Design, Crimp flange set  HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.		21 01 010 00xx	21 01 010 00xx	 <table><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																															
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																															
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																															
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																															
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																															
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																															
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																															
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																															



Number of contacts

8

Crimp termination
Shielded



Technical characteristics

Number of contacts	8
Rated current	0.5 A
Rated voltage	48 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.4 mm
Locking type	Screw locking, PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.08 ... 0.25 mm ² , 0.13 ... 0.25 mm ² , 0.08 ... 0.22 mm ²
Conductor cross-section	AWG 28 ... AWG 23, AWG 26 ... AWG 23, AWG 28 ... AWG 24
Cable diameter	5.7 ... 8.8 mm
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz
Tightening torque	0.6 Nm, 2 Nm Lock nut

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

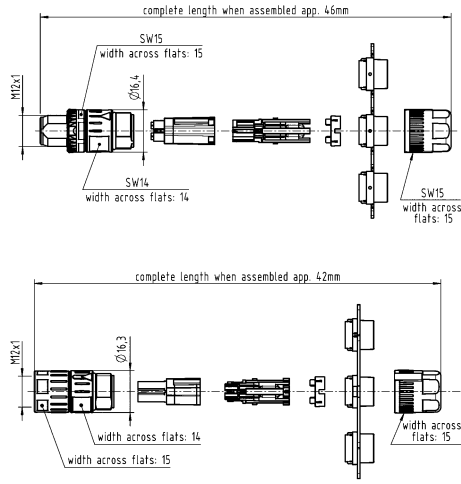
Specifications and approvals

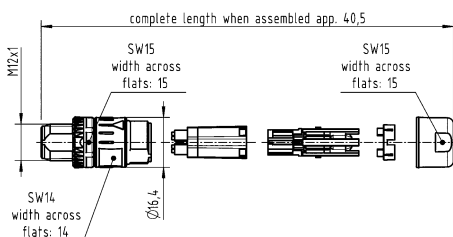
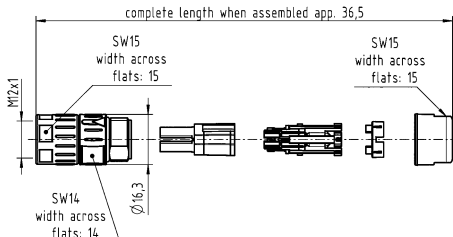
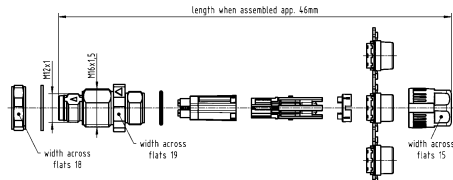
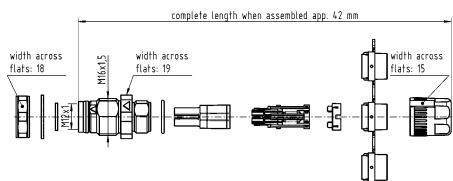
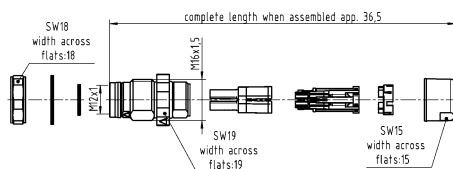
IEC 61076-2-109
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



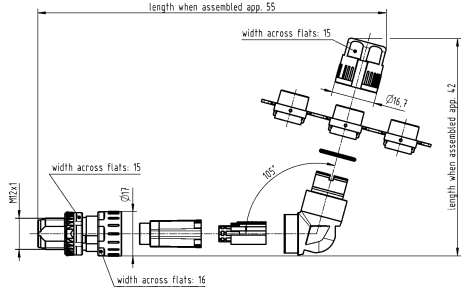
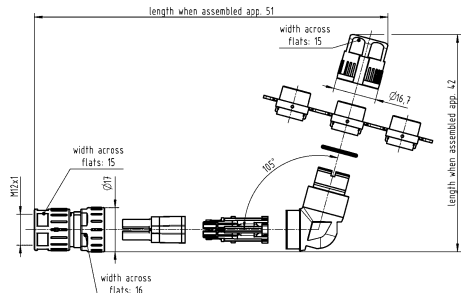
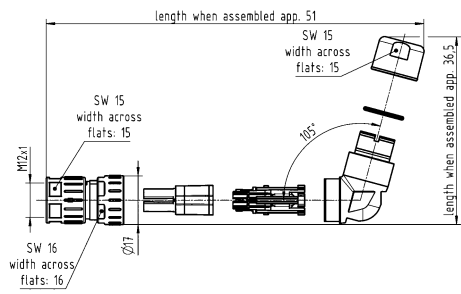
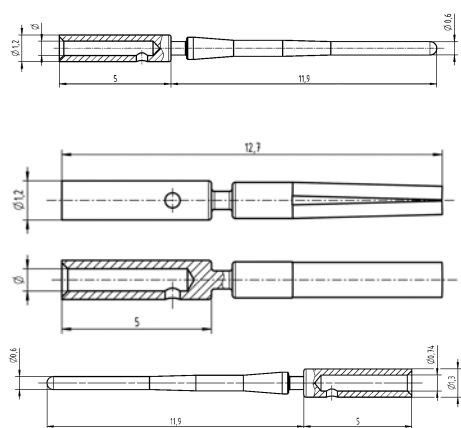
Details

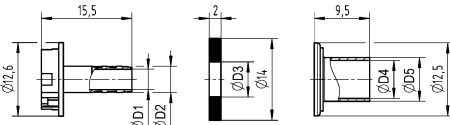
For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.08 ... 0.25	21 03 881 1805	21 03 881 2805	

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.08 ... 0.25	21 03 881 1807	21 03 881 2807	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded  Please order crimp contacts separately.	0.08 ... 0.25	21 03 881 1825	21 03 881 2825	 
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.08 ... 0.25		21 03 881 2827	

M12

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.08 ... 0.25	21 03 881 3805	21 03 881 4805	 
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.08 ... 0.25	21 03 881 3807	21 03 881 4807	
<i>har-speed</i> , Crimp contact, Turned contacts 	0.08 ... 0.22 0.13 ... 0.25	21 01 100 9014 21 01 100 9019	21 01 100 9023 21 01 100 9021	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
Circular connectors M12, Slim Design, Crimp flange set  HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.		21 01 010 00xx	21 01 010 00xx	 <table><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																															
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																															
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																															
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																															
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																															
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																															
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																															
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																															

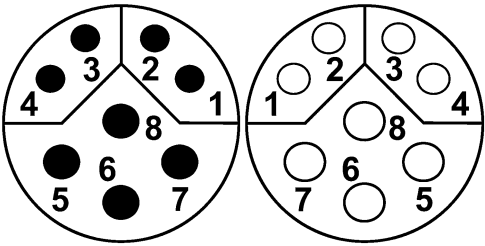
M12



Number of contacts

8

4 Power + 4 Data
Crimp termination
Shielded



Technical characteristics

Number of contacts	8
Rated current	6 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (data)	0.5 A
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Locking type	PushPull, Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.33 ... 0.82 mm ² , 0.13 ... 0.25 mm ² , 0.08 ... 0.22 mm ²
Conductor cross-section	AWG 22 ... AWG 18, AWG 26 ... AWG 23, AWG 28 ... AWG 24

Technical characteristics

Cable diameter	5.7 ... 8.8 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

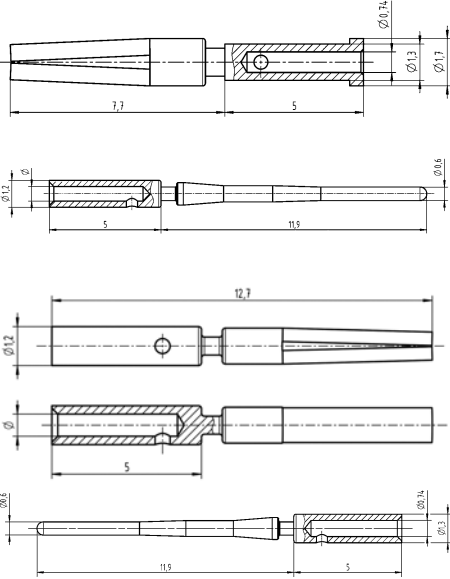
Specifications and approvals

IEC 61076-2-113

Details

For Fast Ethernet applications only


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 861 1830		
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 861 1814	21 03 861 2805	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded Please order crimp contacts separately.		21 03 861 1825	21 03 861 2825	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces <i>har-speed</i> , Crimp contact, Turned contacts 	0.13 ... 0.25 0.33 ... 0.82 0.08 ... 0.22 0.13 ... 0.25	21 01 100 9982 21 01 100 9981 21 01 100 9014 21 01 100 9019	21 01 100 9984 21 01 100 9983 21 01 100 9023 21 01 100 9021	

Number of contacts

4

HARAX® connection technology
Shielded



Technical characteristics

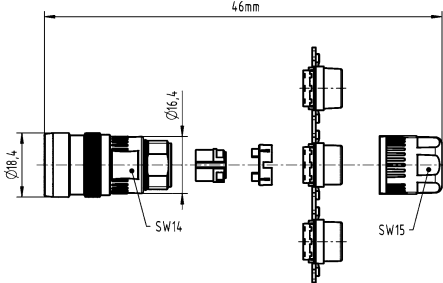
Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.6 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 mm ² , 0.14 mm ²
Conductor cross-section	AWG 22, AWG 26

Technical characteristics

Cable diameter	5.7 ... 8.8 mm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption


Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, HARAX® connection technology, Shielded 	0.14 0.34	21 03 322 1411 21 03 322 1401	

Number of contacts

5

Crimp termination
Shielded

M12

Technical characteristics

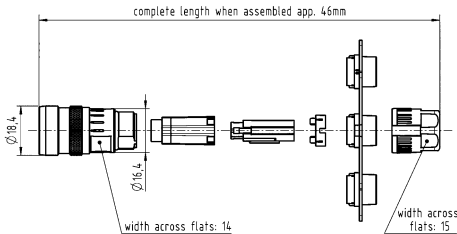
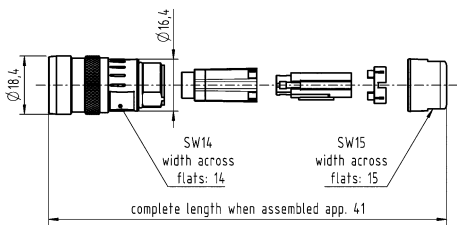
Number of contacts	5
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤2.3 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.82 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²

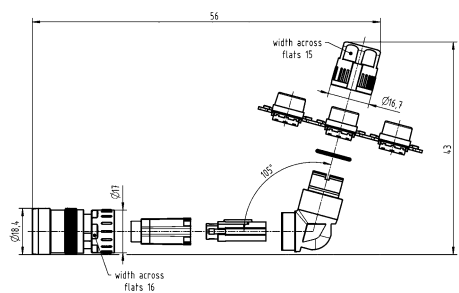
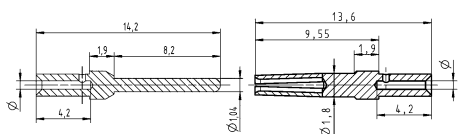
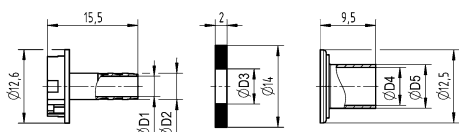
Technical characteristics

Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18
Cable diameter	5.7 ... 8.8 mm
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant with exemption

Specifications and approvals


IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded 	0.13 ... 0.82	21 03 821 1530		
Please order crimp contacts separately. Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange 	0.13 ... 0.82	21 03 821 1533		
Please order crimp contacts separately. Please order crimp flange set separately.				

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 821 3530																																																		
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 821 3533																																																		
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm																																	
Wire gauge	Ø	Stripping length																																																		
0.09-0.25 mm²	0.64 mm	4 mm																																																		
0.13-0.33 mm²	0.88 mm	4 mm																																																		
0.25-0.52 mm²	1.13 mm	4 mm																																																		
0.33-0.82 mm²	1.34 mm	4 mm																																																		
Circular connectors M12, Slim Design, Crimp flange set  HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.		21 01 010 00xx	21 01 010 00xx	 <table><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																															
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																															
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																															
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																															
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																															
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																															
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																															
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																															

Number of contacts

8

Crimp termination
Shielded

M12

Technical characteristics

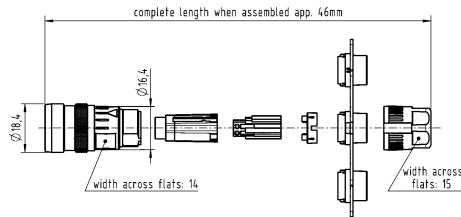
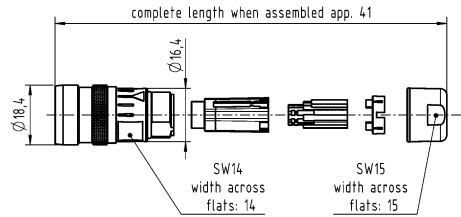
Number of contacts	8
Rated current	2 A
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	30 V AC, 30 V DC
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.65 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.33 mm ²
Conductor cross-section	AWG 26 ... AWG 22

Technical characteristics

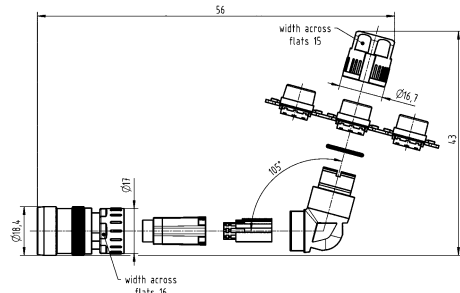
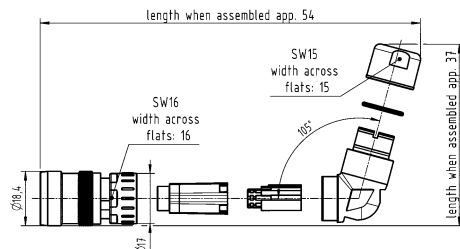
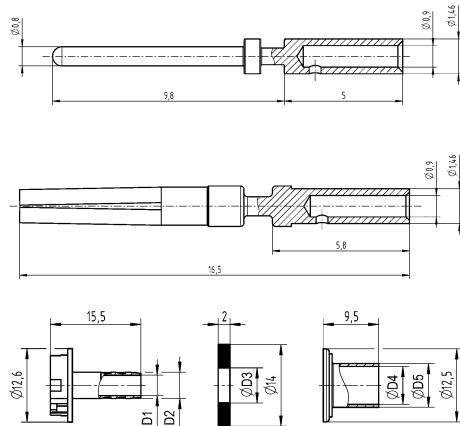
Cable diameter	5.7 ... 8.8 mm
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded 	0.13 ... 0.33	21 03 821 1830		
Please order crimp contacts separately.				
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange 	0.13 ... 0.33	21 03 821 1833		
Please order crimp contacts separately. Please order crimp flange set separately.				


M12

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.33	21 03 821 3830																																																		
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.33	21 03 821 3833																																																		
Circular connectors M12, Crimp contact, Turned contacts  Circular connectors M12, Slim Design, Crimp flange set  HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.	0.13 ... 0.33	21 01 100 9020	21 01 100 9025	 <table><thead><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr></thead><tbody><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></tbody></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																															
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																															
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																															
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																															
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																															
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																															
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																															
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																															

Number of contacts

4

HARAX® connection technology
Shielded



M12

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.6 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.34 mm ² , 0.14 mm ²
Conductor cross-section	AWG 22, AWG 26
Cable diameter	5.7 ... 8.8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

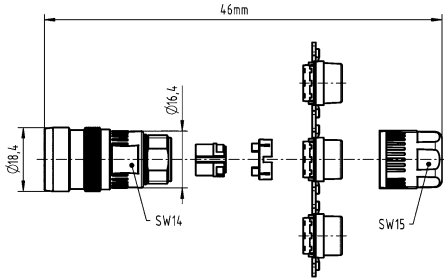
Specifications and approvals

IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521




Details

For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, HARAX® connection technology, Shielded 	0.14 0.34	21 03 382 1411 21 03 382 1401	

Number of contacts

4

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	4 A
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated voltage	48 V AC, 60 V DC
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤2.3 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.13 ... 0.82 mm ² , 0.09 ... 0.25 mm ² , 0.13 ... 0.33 mm ² , 0.25 ... 0.52 mm ² , 0.33 ... 0.82 mm ²
Conductor cross-section	AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18

Technical characteristics

Cable diameter	5.7 ... 8.8 mm
Transmission characteristics	Cat. 5, Class D up to 100 MHz
Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
RoHS	compliant with exemption

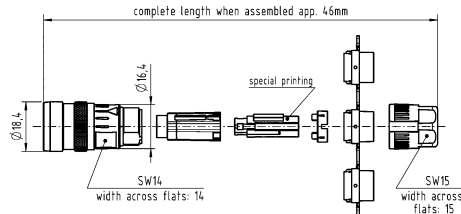
Specifications and approvals

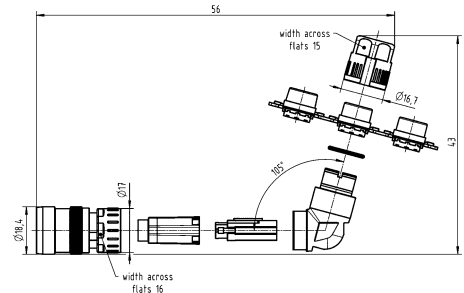
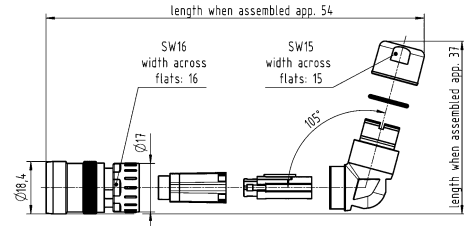
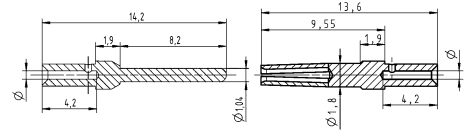
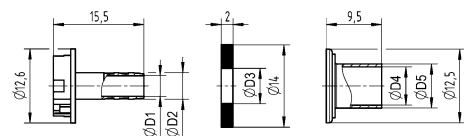
IEC 61076-2-101
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



Details


For Fast Ethernet applications only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 ... 0.82	21 03 881 1430		
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 ... 0.82	21 03 881 1433		

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																																																
		Male	Female																																																	
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded 	0.13 ... 0.82	21 03 881 3430																																																		
Please order crimp contacts separately.																																																				
Circular connectors M12, PushPull, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange 	0.13 ... 0.82	21 03 881 3433																																																		
Please order crimp contacts separately. Please order crimp flange set separately.																																																				
D-Sub, Standard, Crimp contact, Turned contacts 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52 0.33 ... 0.82	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>0.64 mm</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>0.88 mm</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.13 mm</td><td>4 mm</td></tr><tr><td>0.33-0.82 mm²</td><td>1.34 mm</td><td>4 mm</td></tr></table> for stranded wire according IEC 60228 Class 5	Wire gauge	Ø	Stripping length	0.09-0.25 mm²	0.64 mm	4 mm	0.13-0.33 mm²	0.88 mm	4 mm	0.25-0.52 mm²	1.13 mm	4 mm	0.33-0.82 mm²	1.34 mm	4 mm																																	
Wire gauge	Ø	Stripping length																																																		
0.09-0.25 mm²	0.64 mm	4 mm																																																		
0.13-0.33 mm²	0.88 mm	4 mm																																																		
0.25-0.52 mm²	1.13 mm	4 mm																																																		
0.33-0.82 mm²	1.34 mm	4 mm																																																		
Circular connectors M12, Slim Design, Crimp flange set 		21 01 010 00xx	21 01 010 00xx	 <table><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																															
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																															
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																															
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																															
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																															
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																															
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																															
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																															
HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.																																																				

Number of contacts

8

Crimp termination
Shielded

Technical characteristics

Number of contacts	8
Rated current	0.5 A
Rated voltage	48 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Wire outer diameter	≤1.4 mm
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.08 ... 0.25 mm ² , 0.13 ... 0.25 mm ² , 0.08 ... 0.22 mm ²
Conductor cross-section	AWG 28 ... AWG 23, AWG 26 ... AWG 23, AWG 28 ... AWG 24
Cable diameter	5.7 ... 8.8 mm
Transmission characteristics	Cat. 6A, Class E _A up to 500 MHz

Technical characteristics

Material (insert)	Liquid crystal polymer (LCP)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

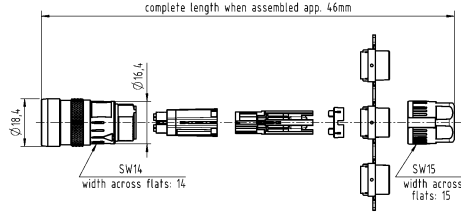
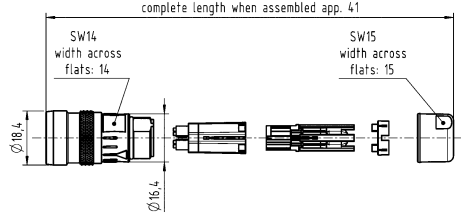
Specifications and approvals

IEC 61076-2-109
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



Details

For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.08 ... 0.25	21 03 881 1830		
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.08 ... 0.25	21 03 881 1833		

4+ 

A circular diagram representing a four-ported device. The circle is divided into four quadrants by a vertical line and a horizontal line. Each quadrant contains a solid black circle labeled with a number: 1 (top-left), 2 (bottom-left), 3 (bottom-right), and 4 (top-right). In the center of the circle, where the lines intersect, is a smaller circle labeled 'PE'.

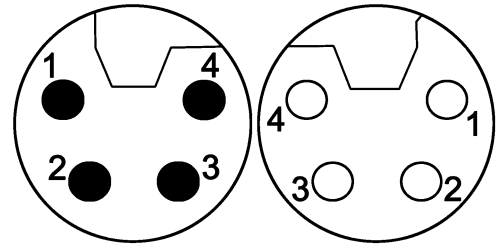
Number of contacts	4
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.5 ... 2.5 mm ² , 2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²

IEC 61076-2-111

Number of contacts

4

Crimp termination
Shielded



M12

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²
Conductor cross-section	AWG 14, AWG 16, AWG 19, AWG 21

Technical characteristics

Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-111




Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1420	21 03 896 2420	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	Technical drawing of the circular connector assembly showing three views: a side view of the male connector, a side view of the female connector, and a detailed cross-sectional view of the crimp contact. Dimensions are provided in millimeters.

C03
12
.
71

Number of contacts

4+

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥500
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²
Conductor cross-section	AWG 14, AWG 16, AWG 19, AWG 21

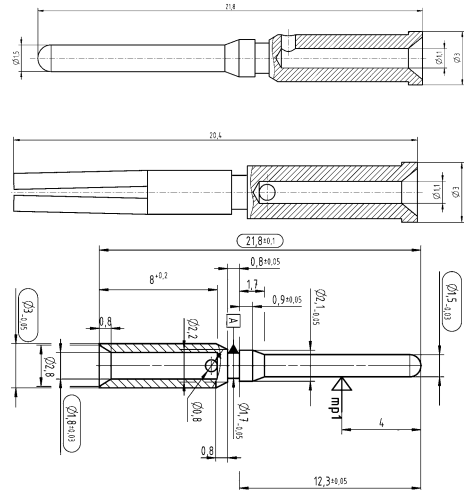
Technical characteristics

Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

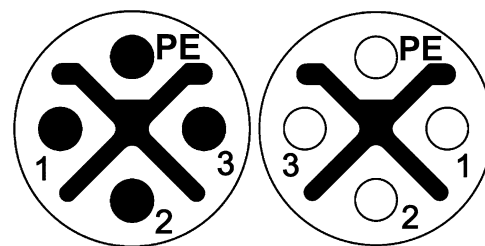
Specifications and approvals

IEC 61076-2-111



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1520	21 03 896 2520	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	

Number of contacts

3+
Crimp termination
Shielded

M12

Technical characteristics

Number of contacts	3
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	PushPull
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²

Technical characteristics

Conductor cross-section	AWG 14, AWG 16, AWG 19, AWG 21
Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-111

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1425	21 03 896 2425	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	

4+ 

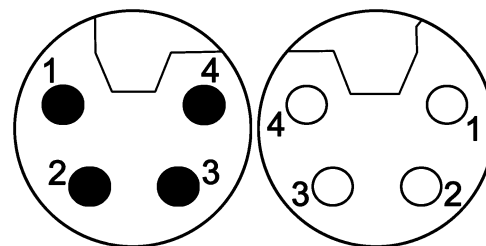
IEC 61076-2-111

**C03
12
.
74**

Number of contacts

4

HARAX® connection technology
Shielded



M12

Technical characteristics

Number of contacts	4
Rated current	12 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16
Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm

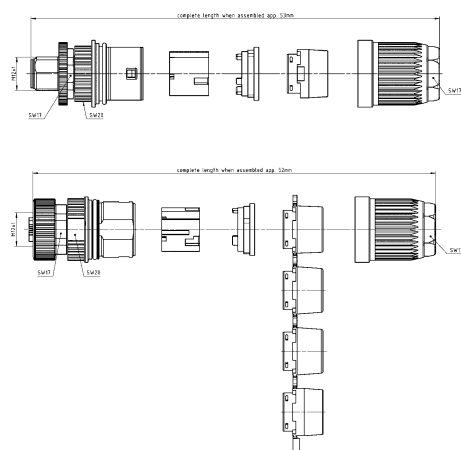
Technical characteristics

Material (insert)	Polyamide (PA)
Colour (insert)	Black
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

IEC 61076-2-111

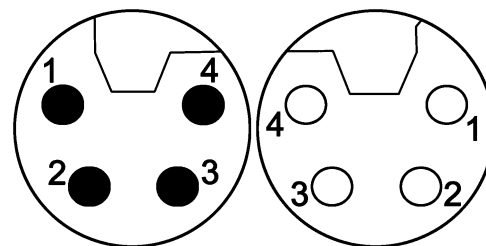


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Cable connector, Straight, HARAX® connection technology, Shielded 	0.75 ... 1.5	21 03 296 1506	21 03 296 2506	

C03
12
·
75

Number of contacts

4

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²
Conductor cross-section	AWG 14, AWG 16, AWG 19, AWG 21

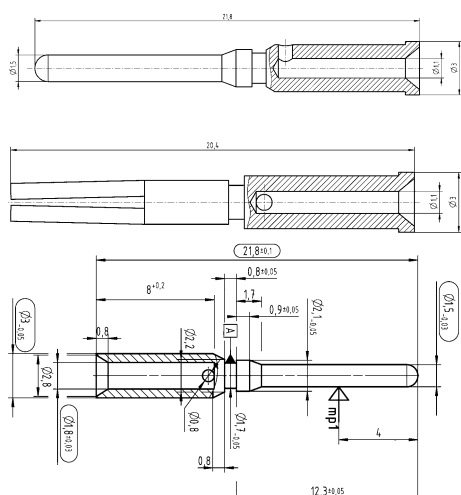
Technical characteristics

Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

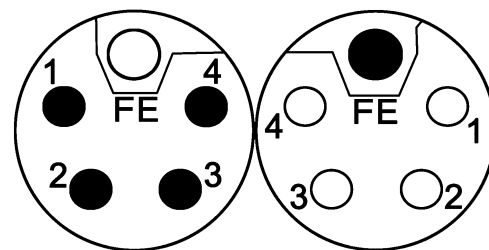
Specifications and approvals

IEC 61076-2-111



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 896 1410	21 03 896 2410	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	

Number of contacts

4+
HARAX® connection technology
Shielded


M12

Technical characteristics

Number of contacts	4
Rated current	12 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Contact resistance	≤10 mΩ
Mating cycles	≥100
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16
Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm

Technical characteristics

Material (insert)	Polyamide (PA)
Colour (insert)	Grey
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant

Specifications and approvals

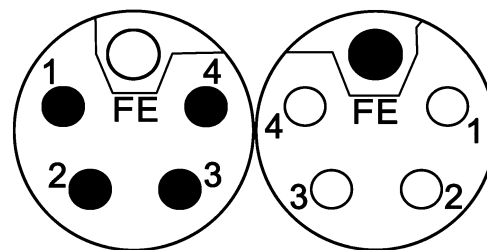
IEC 61076-2-111



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Cable connector, Straight, HARAX® connection technology, Shielded 	0.75 ... 1.5	21 03 296 1505	21 03 296 2505	

Number of contacts

4+

Crimp termination
Shielded

Technical characteristics

Number of contacts	4
Rated current	16 A
Rated voltage	63 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.5 ... 2.5 mm ² , 2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²
Conductor cross-section	AWG 20 ... AWG 14, AWG 14, AWG 16, AWG 20, AWG 21
Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm

Technical characteristics


Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

IEC 61076-2-111
UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521

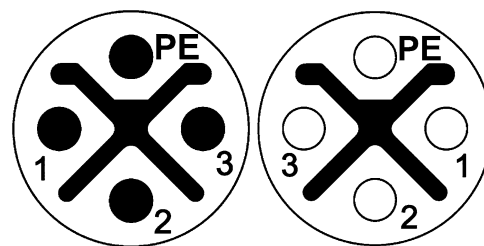


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded Please order crimp contacts separately.	0.5 ... 2.5	21 03 896 1505	21 03 896 2505	
Circular connectors M12, Power, Crimp contact, 23.2 mm length, Turned contacts 	0.5 0.75 1.5 2.5	21 01 100 9923 21 01 100 9924 21 01 100 9925 21 01 100 9926	21 01 100 9931 21 01 100 9932 21 01 100 9933 21 01 100 9934	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Crimp contact, FE contact, 24.8 mm length, Turned contacts	0.5 0.75 1.5 2.5	21 01 100 9927 21 01 100 9928 21 01 100 9929 21 01 100 9930		
 use with M12 Power female contacts				

4 + 

Number of contacts

3+
Crimp termination
Shielded

M12

Technical characteristics

Number of contacts	3
Rated current	12 A
Rated voltage	630 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 500
Locking type	Screw locking
Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	2.5 mm ² , 1.5 mm ² , 0.75 mm ² , 0.5 mm ²

Technical characteristics

Conductor cross-section	AWG 14, AWG 16, AWG 19, AWG 21
Cable diameter	5.8 ... 13.5 mm
Tightening torque	0.6 Nm
Material (insert)	Polyamide (PA)
Material (hood/housing)	Zinc die-cast
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated

Specifications and approvals

IEC 61076-2-111

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 896 1415	21 03 896 2415	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	

M12

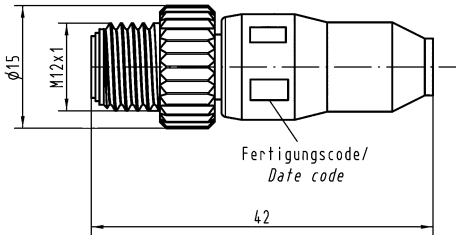
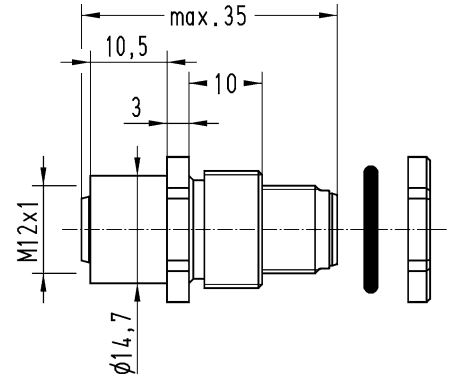
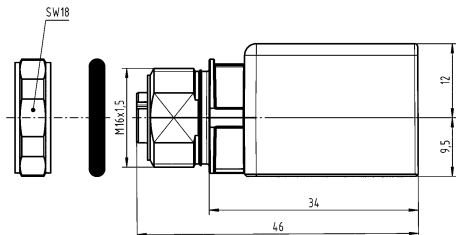
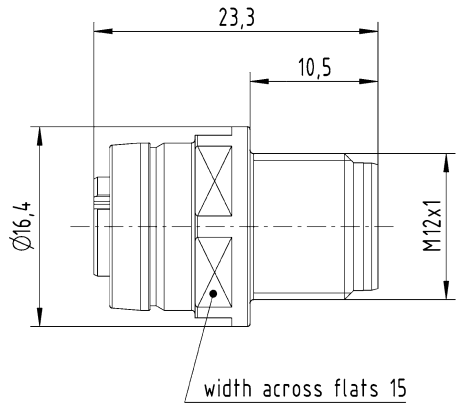
Technical characteristics

Mating cycles	≥100
Locking type	PushPull
RoHS	compliant, compliant with exemption

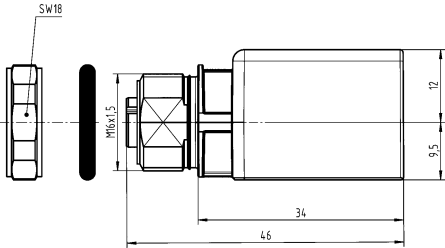
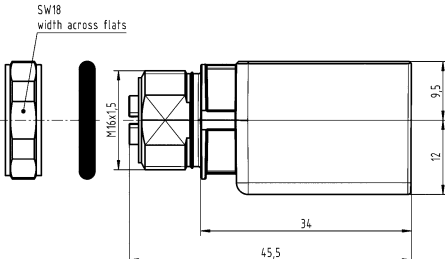
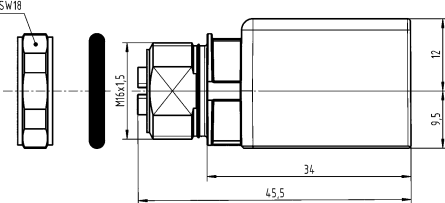
Specifications and approvals



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, M12-male moving load, A-coding	21 03 030 1400		
			
Circular connectors M12, Unshielded, T-splitter, A-coding	21 03 319 9501		
			
Circular connectors M12, Unshielded, Y-splitter, A-coding	21 03 321 9400		
			

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, M12-male moving load, B-coding 	21 03 030 1300		 $\phi 15$ $M12 \times 1$ Fertigungscode/ <i>Date code</i> 42
Circular connectors M12, M12-male/female panel feed through, B-coding 		21 03 330 1300	 $\phi 15$ $M12 \times 1$ $\phi 14,7$ max. 35 10,5 3 10
Circular connectors M12, M12 female-RJ45 panel feed through, D-coding, 4-pin, Straight 		21 03 381 2401	 $\phi 15$ $M12 \times 1$ SW18 12 9,5 34 46
Circular connectors M12, M12 PushPull adapter, D-coding, 4-pin 		21 03 381 2403	 $\phi 16,4$ 23,3 10,5 $M12 \times 1$ width across flats 15

M12

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Circular connectors M12, M12 female-RJ45 panel feed through, D-coding, 4-pin, Angled 		21 03 381 4401	
Circular connectors M12, <i>har</i>-speed M12 adapter M12-RJ45, X-coding, Straight, Cat. 6_A 		21 03 381 2800	
Circular connectors M12, <i>har</i>-speed M12 adapter M12-RJ45, X-coding, Angled, Cat. 6_A 		21 03 381 4800	

Technical characteristics

Locking type	PushPull, Screw locking
Material (accessories)	Thermoplastic
Colour (accessories)	Black
RoHS	compliant with exemption, compliant

Specifications and approvals

UL 2238 CYJV2.E302521
CSA-C22.2 No. 182.3 CYJV8.E302521



Identification	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Gender changer, D-coding, 4-pin, Cat. 5	21 03 381 6401	
Circular connectors M12, Gender changer, D-coding, 4-pin or 8-pin	21 03 381 6402	
Circular connectors M12, Gender changer, D-coding, With PushPull, 4-pin, Cat. 5	21 03 381 6403	
Circular connectors M12, Gender changer, D-coding / X-coding, With PushPull, 4-pin or 8-pin	21 03 381 6404	

M12

Identification

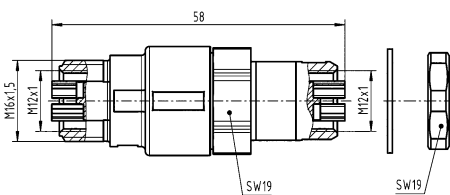
Circular connectors M12,
Gender changer,
X-coding,
Cat. 6_A



Part number Female

21 03 381 6815

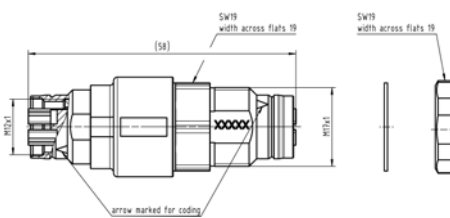
Drawing (dimensions in mm)



Circular connectors M12,
Gender changer,
X-coding,
With PushPull,
Cat. 6_A



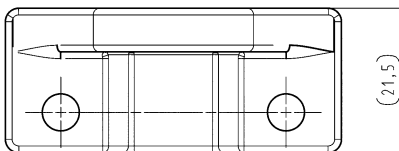
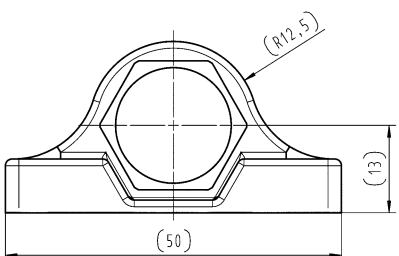
21 03 381 6816



Circular connectors M12,
Panel mounting parts



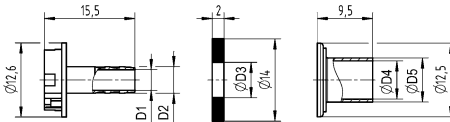
21 01 000 0036



Technical characteristics

RoHS

compliant with exemption

Identification	Part number	Drawing (dimensions in mm)																																																
Circular connectors M12, Slim Design, Crimp flange set  HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.	21 01 010 0017 21 01 010 0018 21 01 010 0019 21 01 010 0020 21 01 010 0021 21 01 010 0022 21 01 010 0024	 <table><tr><th></th><th>D1</th><th>D2</th><th>D3</th><th>D4</th><th>D5</th></tr><tr><td>21 01 010 0017</td><td>3.5</td><td>4.5</td><td>6.0</td><td>6.5</td><td>7.5</td></tr><tr><td>21 01 010 0018</td><td>4.5</td><td>5.5</td><td>6.6</td><td>7.5</td><td>8.5</td></tr><tr><td>21 01 010 0019</td><td>4.5</td><td>5.5</td><td>6.8</td><td>8.0</td><td>9.0</td></tr><tr><td>21 01 010 0020</td><td>5.0</td><td>6.0</td><td>7.8</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0021</td><td>6.5</td><td>7.5</td><td>8.0</td><td>10.0</td><td>10.8</td></tr><tr><td>21 01 010 0022</td><td>5.0</td><td>6.0</td><td>7.4</td><td>9.0</td><td>10.0</td></tr><tr><td>21 01 010 0024</td><td>5.5</td><td>6.5</td><td>8.8</td><td>10.0</td><td>10.8</td></tr></table>		D1	D2	D3	D4	D5	21 01 010 0017	3.5	4.5	6.0	6.5	7.5	21 01 010 0018	4.5	5.5	6.6	7.5	8.5	21 01 010 0019	4.5	5.5	6.8	8.0	9.0	21 01 010 0020	5.0	6.0	7.8	9.0	10.0	21 01 010 0021	6.5	7.5	8.0	10.0	10.8	21 01 010 0022	5.0	6.0	7.4	9.0	10.0	21 01 010 0024	5.5	6.5	8.8	10.0	10.8
	D1	D2	D3	D4	D5																																													
21 01 010 0017	3.5	4.5	6.0	6.5	7.5																																													
21 01 010 0018	4.5	5.5	6.6	7.5	8.5																																													
21 01 010 0019	4.5	5.5	6.8	8.0	9.0																																													
21 01 010 0020	5.0	6.0	7.8	9.0	10.0																																													
21 01 010 0021	6.5	7.5	8.0	10.0	10.8																																													
21 01 010 0022	5.0	6.0	7.4	9.0	10.0																																													
21 01 010 0024	5.5	6.5	8.8	10.0	10.8																																													

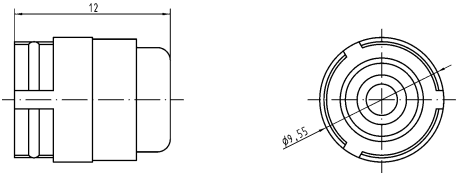
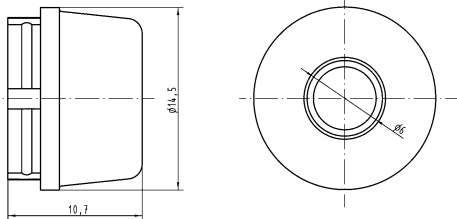
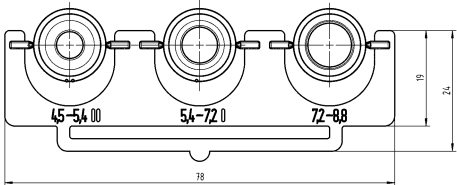
M12

Technical characteristics

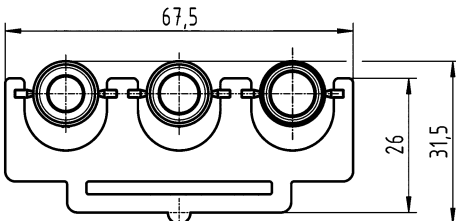
Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black
RoHS compliant

Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)	
Circular connectors M12, M12-S, Seal, Unshielded 	2.9 ... 4 4 ... 5.1	21 01 010 2011 21 01 010 2001		
Circular connectors M12, M12-L, Seal, Unshielded 	4.7 ... 6 6 ... 8	21 01 010 2015 21 01 010 2007		
Circular connectors M12, M12-L, Set of seals, Shielded 	4.5 ... 8.8	21 01 010 2017		

C03
12
·
88

Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Set of seals, Shielded 	4.5 ... 8.8 5.7 ... 8.8	21 01 010 2038 21 01 010 2028	

M12

Technical characteristics

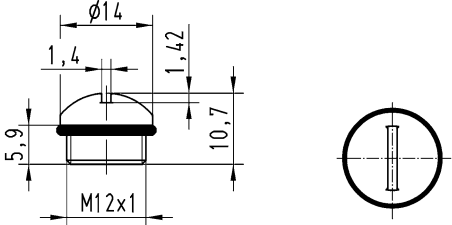
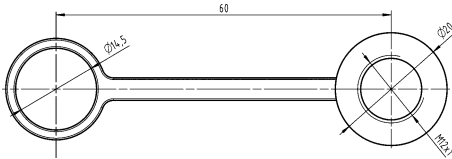
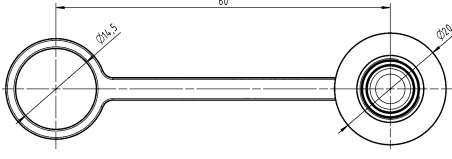
Degree of protection acc. to IEC IP65 / IP67, IP67 60529

Technical characteristics

Material (accessories)Thermoplastic

Colour (accessories)Black

RoHScompliant

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, IP65 / IP67	21 01 000 0003	
Circular connectors M12, Cap, for male inserts, with cord, IP67	21 41 000 0001	
Circular connectors M12, Cap, for female inserts, with cord, IP67	21 41 000 0002	

M12




Technical characteristics

Degree of protection acc. to IEC IP65 / IP67
60529

Technical characteristics

Material (accessories)
RoHS

Metal
compliant with exemption

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, for female inserts, with cord	21 01 000 0030	
Circular connectors M12, Cap, for female inserts, with cable clip	21 01 000 0031	
Circular connectors M12, Cap, for male inserts, with cord	21 01 000 0033	
Circular connectors M12, Cap, for male inserts, with cable clip	21 01 000 0038	

Contents

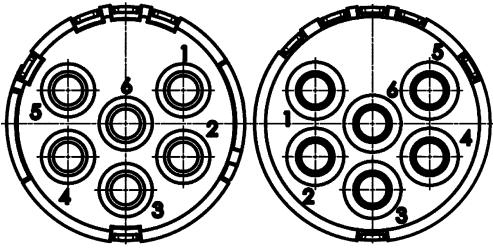
Page

M23 Signal inserts	C03 23.2
M23 Signal contacts	C03 23.16
M23 Signal Hoods/Housings	C03 23.17
M23 Power inserts	C03 23.20
M23 Power contacts	C03 23.25
M23 Power Hoods/Housings	C03 23.26

Number of contacts

6

Crimp termination



Technical characteristics

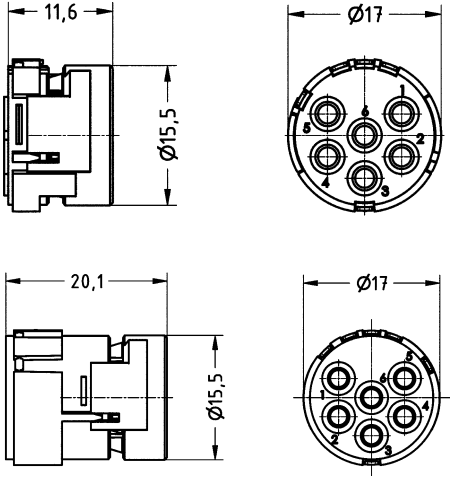
Number of contacts	6
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.75 ... 2.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

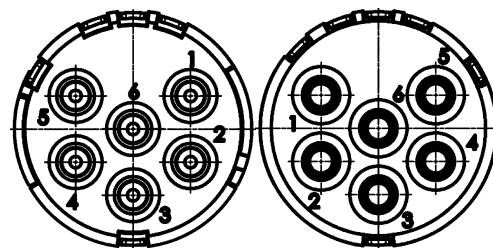
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 6x 2 mm	0.75 ... 2.5	09 15 106 3001	09 15 106 3101	

Number of contacts

6

Solder termination



M23

Technical characteristics

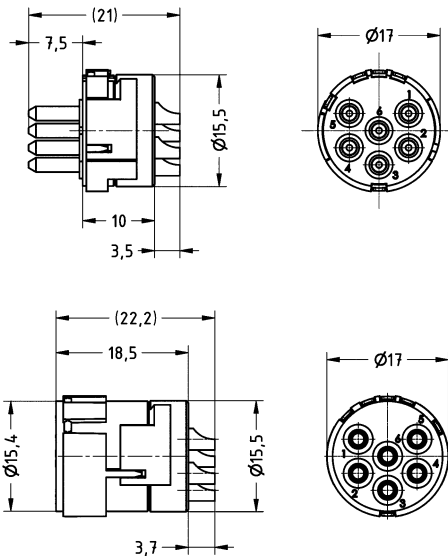
Number of contacts	6
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	2.5 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

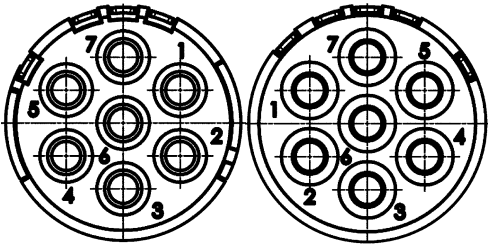
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	2.5 max.	09 15 106 2602	09 15 106 2702	

Number of contacts

7

Crimp termination



Technical characteristics

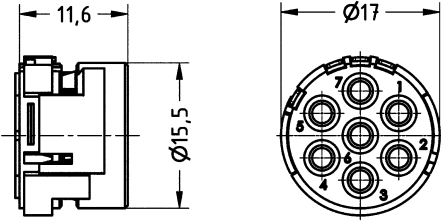
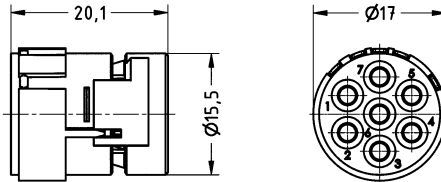
Number of contacts	7
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.75 ... 2.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

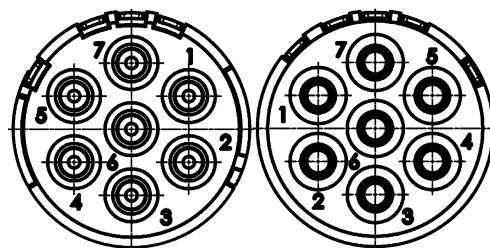
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 7x 2 mm	0.75 ... 2.5	09 15 107 3001	09 15 107 3101	 

Number of contacts

7

Solder termination



M23

Technical characteristics



Number of contacts	7
Rated current	20 A
Rated voltage	300 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	2.5 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	2.5 max.	09 15 107 2602	09 15 107 2702	 

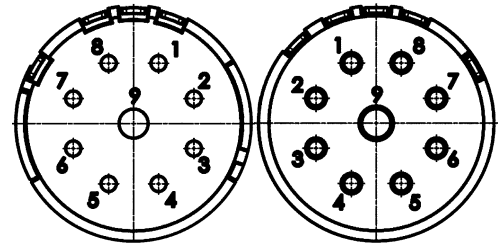
M23 Signal inserts



Number of contacts

8

+ 1 additional special contact
Crimp termination



Technical characteristics

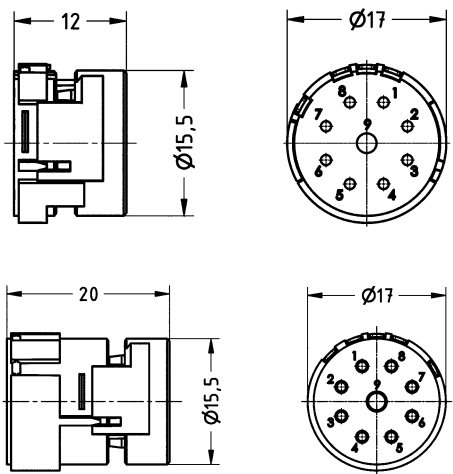
Number of contacts	8
Additional contacts	+ 1 additional special contact
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated current (special contact)	20 A
Rated voltage (special contact)	200 V
Rated impulse voltage (special contact)	2.5 kV
Pollution degree (special contact)	3
Insulation resistance	$>10^{10} \Omega$

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

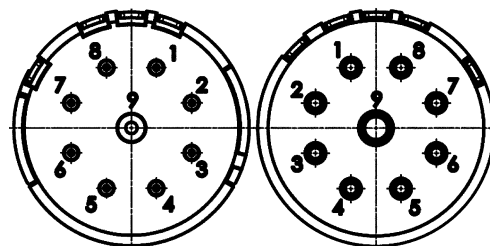
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 8x 1 mm 1x 2 mm	0.08 ... 1.5	09 15 109 3001	09 15 109 3101	

Number of contacts

8

+ 1 additional special contact
Solder termination



M23

Technical characteristics

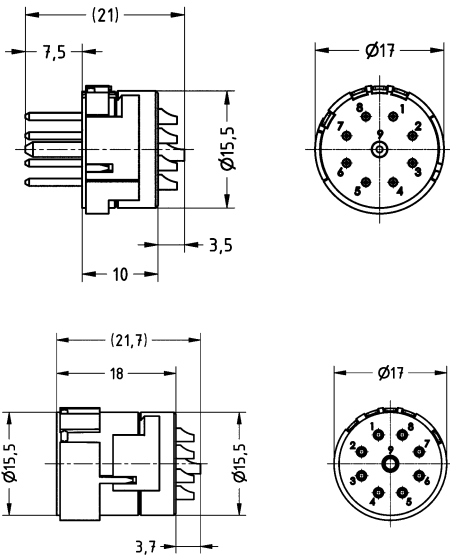
Number of contacts	8
Additional contacts	+ 1 additional special contact
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated current (special contact)	20 A
Rated voltage (special contact)	200 V
Rated impulse voltage (special contact)	2.5 kV
Pollution degree (special contact)	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

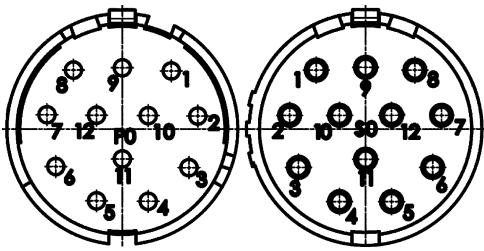
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 109 2602	09 15 109 2702	

Number of contacts

11+

Crimp termination



Technical characteristics

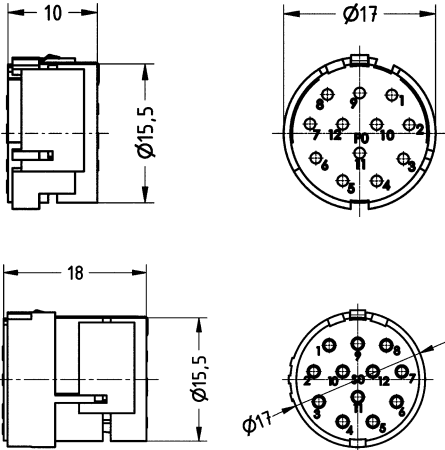
Number of contacts	11
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Grey
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

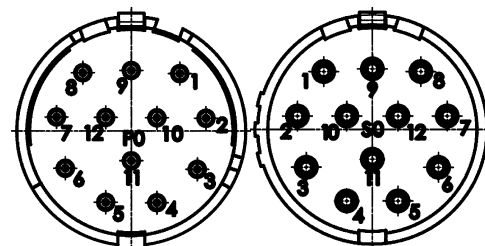
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3021	09 15 112 3121	

Number of contacts

11+

Solder termination



M23

Technical characteristics

Number of contacts	11
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	Grey

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

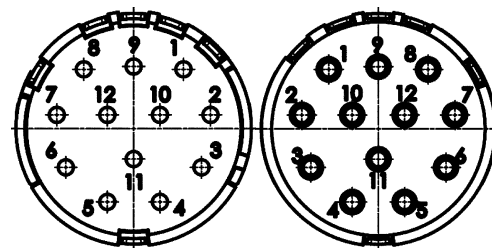
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 112 2622	09 15 112 2722	

Number of contacts

12

Crimp termination



Technical characteristics





Number of contacts	12
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Specifications and approvals

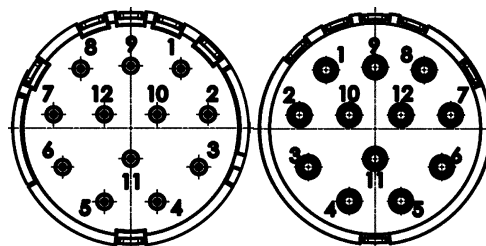
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3001	09 15 112 3101	 
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Crimp termination Please order crimp contacts separately. 12x 1 mm	0.08 ... 1.5	09 15 112 3011	09 15 112 3111	 

Number of contacts

12

Solder termination



M23

Technical characteristics



Number of contacts	12
Rated current	8 A
Rated voltage	200 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption, compliant

Specifications and approvals

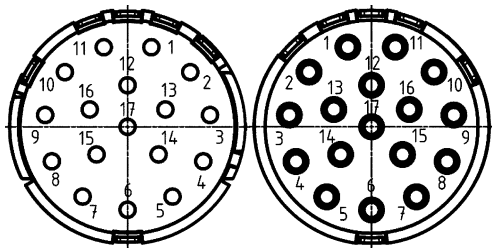
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 112 2602	09 15 112 2702	 
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Solder termination	1 max.	09 15 112 2612	09 15 112 2712	

Number of contacts

17

Crimp termination



Technical characteristics

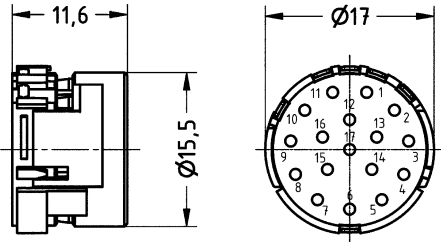
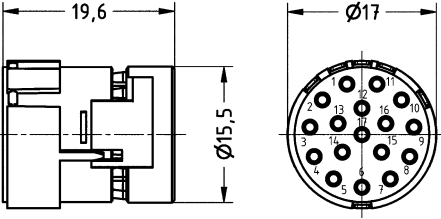
Number of contacts	17
Rated current	8 A
Rated voltage	160 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

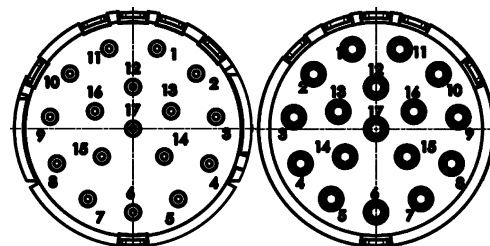
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 17x 1 mm	0.08 ... 1.5	09 15 117 3001	09 15 117 3101	 

Number of contacts

17

Solder termination



M23

Technical characteristics


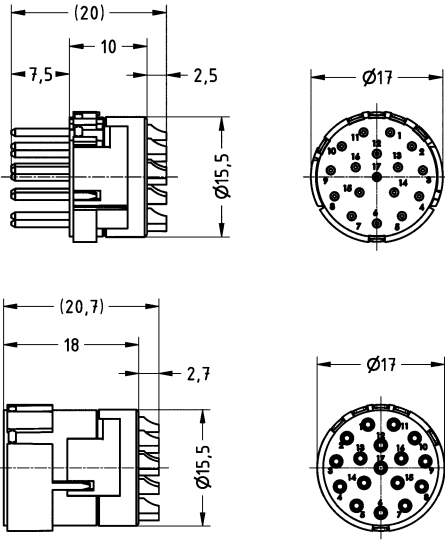
Number of contacts	17
Rated current	8 A
Rated voltage	160 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁶ Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

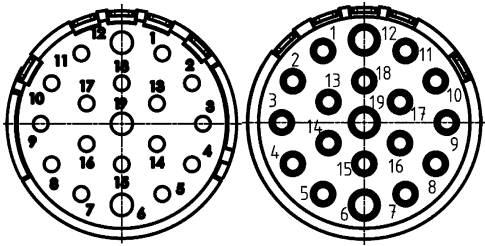
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 117 2602	09 15 117 2702	

Number of contacts

16

+ 3 additional special contacts
Crimp termination



Technical characteristics

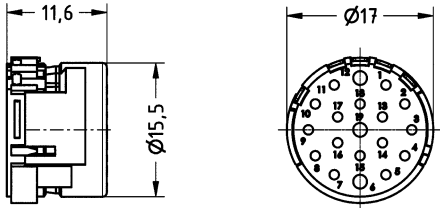
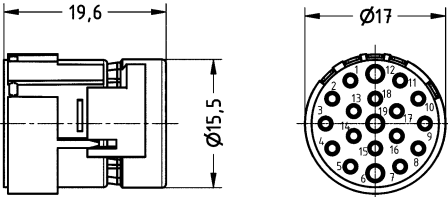
Number of contacts	16
Additional contacts	+ 3 additional special contacts
Rated current	8 A
Rated voltage	100 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3
Insulation resistance	>10 ⁶ Ω

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 1.5 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

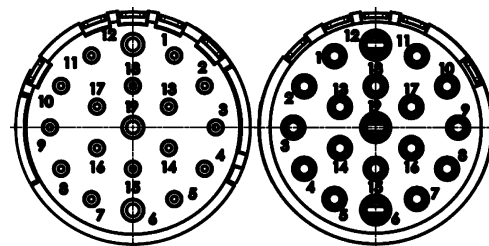
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 16x 1 mm 3x 1.5 mm	0.08 ... 1.5	09 15 119 3001	09 15 119 3101	 

Number of contacts

16

+ 3 additional special contacts
Solder termination



M23

Technical characteristics

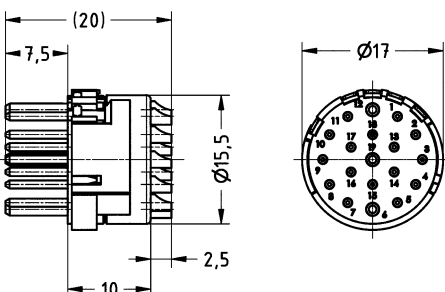
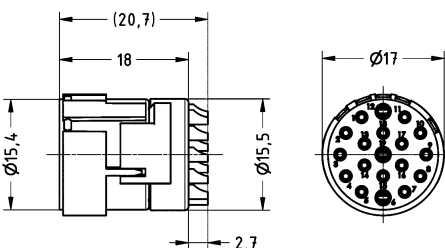
Number of contacts	16
Additional contacts	+ 3 additional special contacts
Rated current	8 A
Rated voltage	100 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Rated current (special contact)	10 A
Rated voltage (special contact)	100 V
Rated impulse voltage (special contact)	1.5 kV
Pollution degree (special contact)	3
Insulation resistance	$>10^6 \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	1 mm ² max.
Material (insert)	Polyamide (PA)
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Inserts, Solder termination 	1 max.	09 15 119 2602	09 15 119 2702	 

Technical characteristics

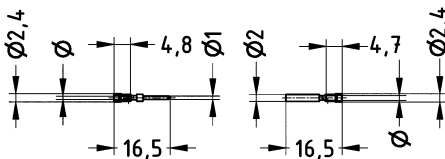
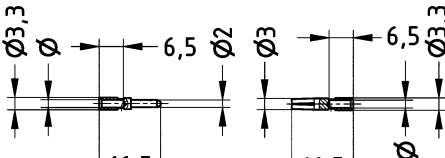
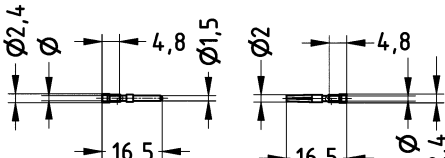
Contact resistance	≤3 mΩ
Conductor cross-section	0.08 ... 0.56 mm ² , 0.14 ... 1 mm ² , 0.75 ... 1.5 mm ² , 0.75 ... 2.5 mm ² , 0.34 ... 1 mm ² , 0.14 ... 0.56 mm ² , 0.56 ... 1 mm ²
Conductor cross-section	AWG 28 ... AWG 20, AWG 26 ... AWG 17, AWG 19 ... AWG 16, AWG 19 ... AWG 14, AWG 22 ... AWG 17, AWG 26 ... AWG 20, AWG 20 ... AWG 17

Technical characteristics

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Signal, Crimp contact, 1 mm, Turned contacts 	0.08 ... 0.56 0.14 ... 1 0.34 ... 1 0.75 ... 1.5	09 15 100 6101 09 15 100 6102 09 15 100 6103	09 15 100 6201 09 15 100 6202 09 15 100 6203	 Stripping length 4 mm
Circular connectors M23, Signal, Crimp contact, 2 mm, Turned contacts 	0.75 ... 2.5	09 15 100 6121	09 15 100 6221	 Stripping length 4 mm
Circular connectors M23, Signal, Crimp contact, 1.5 mm, Turned contacts 	0.14 ... 0.56 0.14 ... 1 0.56 ... 1	09 15 100 6111	09 15 100 6211 09 15 100 6212	 Stripping length 4 mm

Features

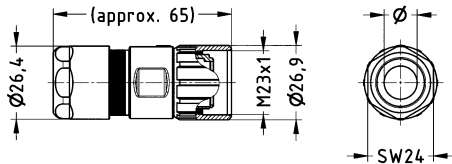
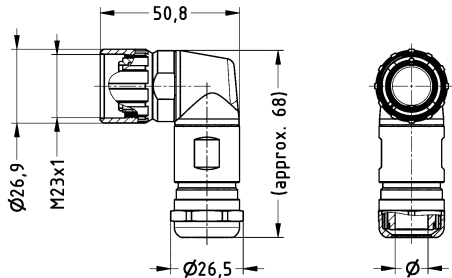
- Screw locking
- ComLock rapid locking
- ComLock-S rapid locking (Compatible to Speedtec from TE)

Technical characteristics

Limiting temperature	-40 ... +125 °C
Locking type	Screw locking, ComLock rapid locking, ComLock-S rapid locking
Degree of protection acc. to IEC 60529	IP67, in locked position, IP69 / IPX9K acc. to ISO 20653
Material (hood/housing)	Copper-zinc alloy
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Colour (seal)	Black
RoHS	compliant with exemption

Specifications and approvals

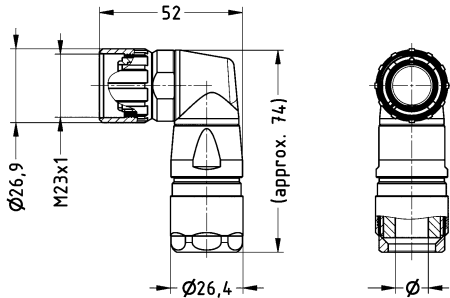
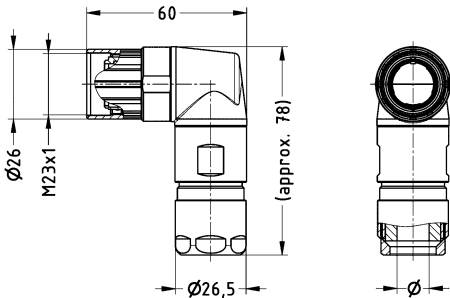
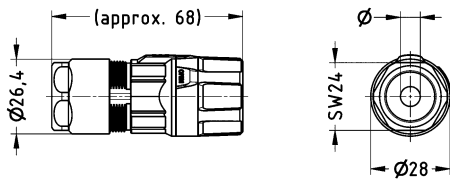
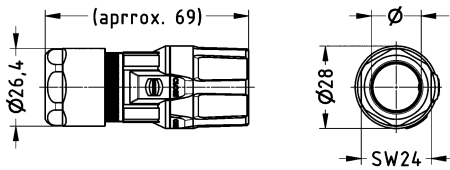
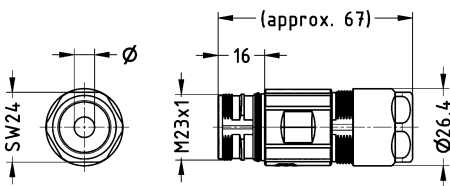
UL 1977 ECBT2.E235076

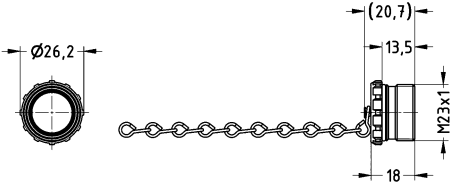

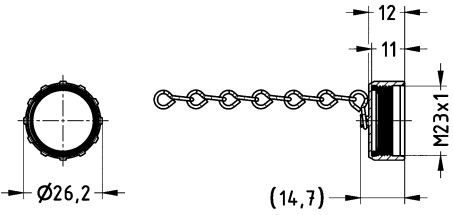
Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Hood, EMC version, Top entry 	3 ... 7 7 ... 12 11 ... 17	09 15 100 0401 09 15 100 0402 09 15 100 0403	
Circular connectors M23, Signal, Hood, Angled entry 	7 ... 12	09 15 100 0601	

M23 Signal Hoods/Housings



M23

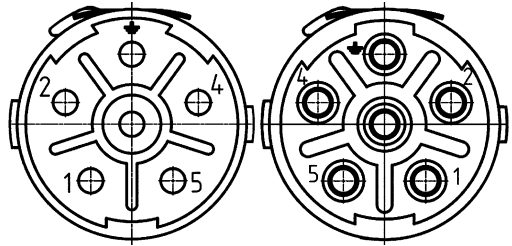
Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Hood, EMC version, Angled entry 	7 ... 12	09 15 100 0602	
Circular connectors M23, Signal, Hood, EMC version, Rotatable, Angled entry 	7 ... 12	09 15 100 0603	
Circular connectors M23, Signal, Hood, EMC version, Top entry, ComLock rapid locking 	3 ... 7 7 ... 12 11 ... 17	09 15 100 0491 09 15 100 0492 09 15 100 0493	
Circular connectors M23, Signal, Hood, EMC version, Top entry, ComLock-S rapid locking 	3 ... 7 7 ... 12 11 ... 17	09 15 100 0481 09 15 100 0482 09 15 100 0483	
Compatible to Speedtec (TE)			
Circular connectors M23, Signal, Cable to cable housing, EMC version, Top entry 	3 ... 7 7 ... 12 11 ... 17	09 15 100 0701 09 15 100 0702 09 15 100 0703	

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Signal, Cover, for hoods, With chain (100 mm) 		09 15 100 9103	
Not compatible to ComLock Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing 		09 15 100 9101	
Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm) 		09 15 100 9102	

Number of contacts

5+

Crimp termination



Technical characteristics



Number of contacts	5
Rated current	28 A
Rated voltage	600 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)

Technical characteristics

Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

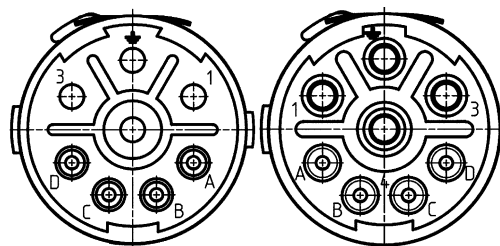
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Crimp termination  Please order crimp contacts separately. 6x 2 mm	0.14 ... 4	09 15 606 3001	09 15 606 3101	 

Number of contacts

3+

+ 4 additional signal contacts
Crimp termination



M23

Technical characteristics



Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Rated current	28 A
Rated voltage	600 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	8 A
Rated voltage (signal)	300 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

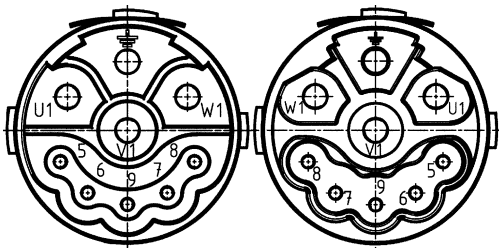
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Crimp termination  Please order crimp contacts separately. 4x 2 mm 4x 1 mm	0.14 ... 4	09 15 608 3001	09 15 608 3101	 

Number of contacts

3+ 

+ 5 additional signal contacts
Crimp termination



Technical characteristics

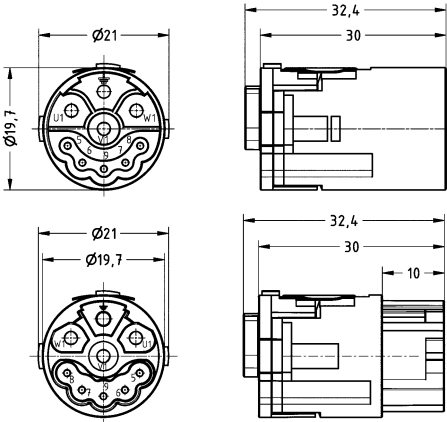
Number of contacts	3
Additional contacts	+ 5 additional signal contacts
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	>10 ¹³ Ω
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

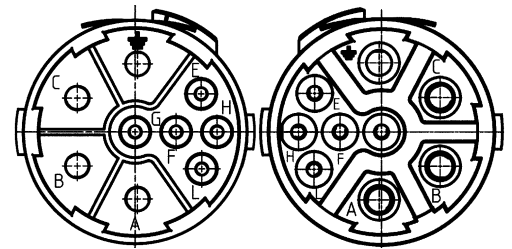
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Mating face (A), Crimp termination  Please order crimp contacts separately. 4x 2 mm 5x 1 mm	0.14 ... 4	09 15 609 3001	09 15 609 3101	

Number of contacts

3+

+ 5 additional signal contacts
Crimp termination



M23

Technical characteristics

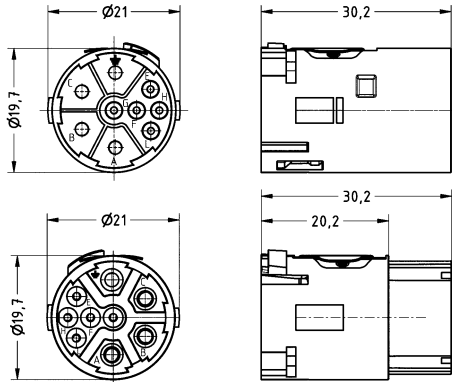
Number of contacts	3
Additional contacts	+ 5 additional signal contacts
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Insulation resistance	$>10^{13} \Omega$
Limiting temperature	-40 ... +125 °C

Technical characteristics

Mating cycles	≥ 500
Conductor cross-section	0.14 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

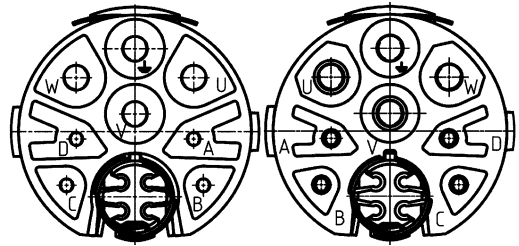
UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Inserts, Mating face (B), Crimp termination  Please order crimp contacts separately. 4x 2 mm 5x 1 mm	0.14 ... 4	09 15 609 3011	09 15 609 3111	

Number of contacts

3+

+ 4 additional signal contacts + 4 Data
Crimp termination



Technical characteristics

Number of contacts	3
Additional contacts	+ 4 additional signal contacts, + 4 Data
Rated current	28 A
Rated voltage	630 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	8 A
Rated voltage (signal)	300 V
Rated impulse voltage (signal)	2.5 kV
Pollution degree (signal)	3
Rated current (data)	2 A
Rated voltage (data)	60 V
Rated impulse voltage (data)	0.5 kV

Technical characteristics

Pollution degree (data)	3
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Conductor cross-section	0.08 ... 4 mm ²
Material (insert)	Polyamide (PA)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0
RoHS	compliant

Specifications and approvals

UL 1977 ECBT2.E235076




Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Hybrid, Inserts, Crimp termination Please order crimp contacts separately. 4x 2 mm 4x 1 mm 4x 0.6 mm	0.08 ... 4	09 15 612 3001	09 15 612 3101	

Technical characteristics

Contact resistance	≤3 mΩ
Conductor cross-section	0.08 ... 0.34 mm ² , 0.14 ... 1 mm ² , 0.75 ... 2.5 mm ² , 2.5 ... 4 mm ²
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant, compliant with exemption

Specifications and approvals

EN 60664-1
IEC 61984

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors M23, Power, Crimp contact, 0.6 mm, Turned contacts 	0.08 ... 0.34	09 15 600 6191	09 15 600 6291	 Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 1 mm, Turned contacts 	0.14 ... 1	09 15 600 6101	09 15 600 6201	 Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 2 mm, Turned contacts 	0.75 ... 2.5 2.5 ... 4	09 15 600 6121 09 15 600 6122	09 15 600 6221 09 15 600 6222	 Stripping length 7 mm

M23

Features

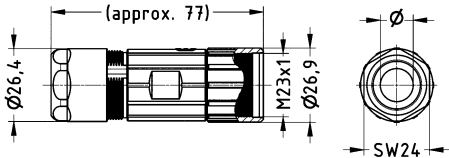
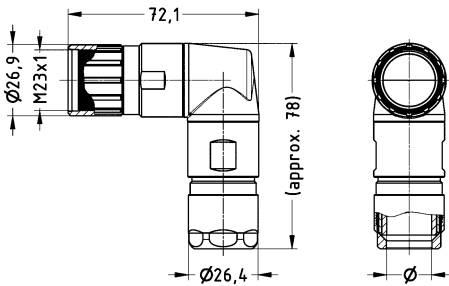
- Screw locking
- ComLock rapid locking
- ComLock-S rapid locking (Compatible to Speedtec from TE)

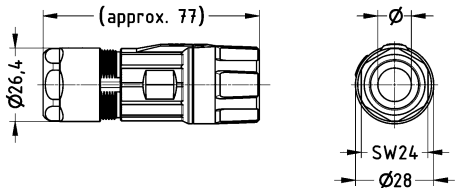
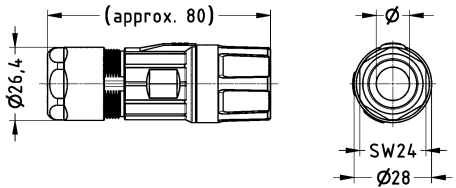
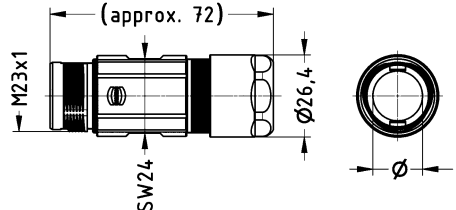
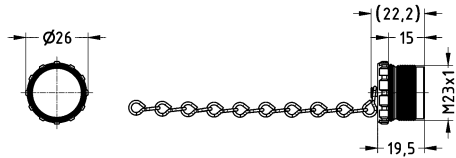
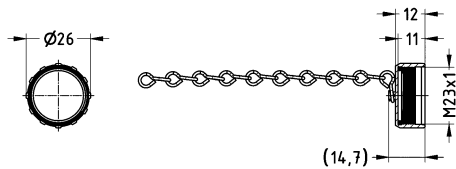
Technical characteristics

Limiting temperature	-40 ... +125 °C
Locking type	Screw locking, ComLock rapid locking, ComLock-S rapid locking
Degree of protection acc. to IEC 60529	IP67 / IP69 / IPX9K acc. to ISO 20653, in locked position
Material (hood/housing)	Copper-zinc alloy
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Colour (seal)	Black
RoHS	compliant with exemption, compliant

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Power, Hood, EMC version, Top entry 	7 ... 12 11 ... 17	09 15 600 0402 09 15 600 0403	
Circular connectors M23, Power, Hood, EMC version, Rotatable, Angled entry 	7 ... 12 11 ... 17	09 15 600 0603 09 15 600 0604	

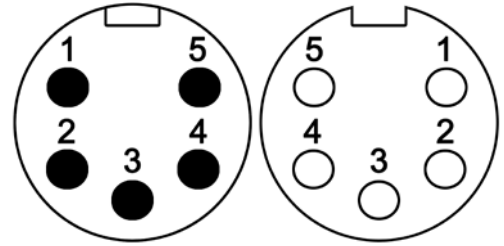
Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M23, Power, Hood, EMC version, Top entry, ComLock rapid locking 	7 ... 12 11 ... 17	09 15 600 0492 09 15 600 0493	
Circular connectors M23, Power, Hood, EMC version, Top entry, ComLock-S rapid locking 	7 ... 12 11 ... 17	09 15 600 0482 09 15 600 0483	
Compatible to Speedtec (TE)			
Circular connectors M23, Power, Cable to cable housing, EMC version, Top entry 	7 ... 12 11 ... 17	09 15 600 0702 09 15 600 0703	
Circular connectors M23, Power, Cover, for hoods, With chain (100 mm) 		09 15 600 9103	
Not compatible to ComLock Circular connectors M23, Power, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm) 		09 15 600 9102	

7/8" HARAX®	C03 35.2
-------------------	----------

Number of contacts

5

HARAX® connection technology
Unshielded

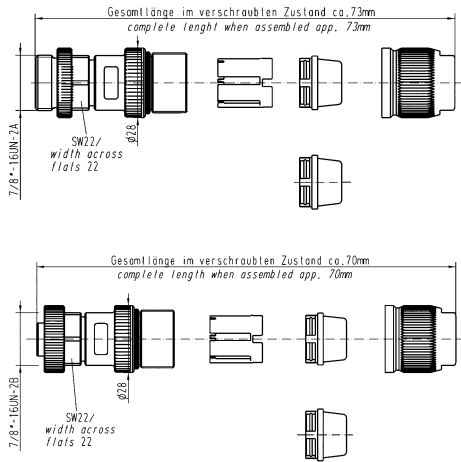


Technical characteristics

Number of contacts	5
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4.8 kV
Pollution degree	3
Insulation resistance	$>10^8 \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Mating cycles	≥ 100
Wire outer diameter	$\leq 2.8 \text{ mm}$
Locking type	Screw locking

Technical characteristics


Degree of protection acc. to IEC 60529	IP65 / IP67, when mated
Conductor cross-section	0.75 ... 1.5 mm ²
Conductor cross-section	AWG 18 ... AWG 16
Cable diameter	6.8 ... 12.5 mm
Tightening torque	1.5 Nm
Material (insert)	Polyamide (PA), Thermoplastic polyurethane (TPU)
Material (hood/housing)	Polyamide (PA), Zinc die-cast, Thermoplastic polyurethane (TPU)
Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Circular connectors 7/8", Cable connector, Straight, HARAX® connection technology, Unshielded 	0.75 ... 1.5	21 04 116 1505	21 04 116 2505	 Gesamtlänge im verschraubten Zustand ca. 73mm complete length when assembled app. 73mm 7/8" - 16UN-2A SW22/ width across flats 22 ø28 Gesamtlänge im verschraubten Zustand ca. 70mm complete length when assembled app. 70mm 7/8" - 16UN-2B SW22/ width across flats 22 ø28


Contents

Page


M8 system cables	CAB 03.02
M8 system cables D-coding	CAB 03.04
M12 system cables A-coding	CAB 03.06
M12 system cables B-coding	CAB 03.12
M12 system cables D-coding	CAB 03.14
M12 system cables X-coding	CAB 03.22
M12 system cables L-coding	CAB 03.30
7/8" system cables	CAB 03.32
M23 system cables, signal	CAB 03.34
M23 system cables, power	CAB 03.36




Male, 3 poles



Male, 4 poles



Female, 3 poles



Female, 4 poles




Technical characteristics

System cables with M8 circular connectors without PE


	3 poles		4 poles	
	PVC	PUR	PVC	PUR
Rated voltage	max. 60 V AC/DC	max. 60 V AC/DC	max. 30 V AC/DC	max. 30 V AC/DC
Rated current / contact	max. 3 A @ +40 °C	max. 3 A @ +40 °C	max. 3 A @ +40 °C	max. 3 A @ +40 °C
Screw locking	M8x1, self securing	M8x1, self securing	M8x1, self securing	M8x1, self securing
Recommended torque	0.4 Nm	0.4 Nm	0.4 Nm	0.4 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	3 x 0.25 mm ²	3 x 0.25 mm ²	3 x 0.25 mm ²	3 x 0.25 mm ²
Conductor insulation	PVC (bn, bu, bk)	PVC (bn, bu, bk)	PVC (bn, wh, bu, bk)	PVC (bn, wh, bu, bk)
Arrangement of insulated strands	32 x Ø 0.1 mm	32 x Ø 0.1 mm	32 x Ø 0.1 mm	32 x Ø 0.1 mm
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)
Sheath colour	grey	black	grey	black
Outer diameter	Ø 4.40 ± 0.15 mm	Ø 4.40 ± 0.15 mm	Ø 4.70 ± 0.15 mm	Ø 4.40 ± 0.15 mm
Useable as trailing cable	no	yes	no	yes
Halogen free acc. to	–	DIN VDE 0472 part 815	–	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60 332-2-2	cUL20549	DIN EN 60 332-2-2	cUL20549
Oil-resistant	–	DIN EN 60811-2-1	–	–

Loading-Plan:




- 1 brown
- 2 blue
- 3 black


Loading-Plan:




- 1 brown
- 2 white
- 3 blue
- 4 black




Male, 3 poles



Male, 4 poles



Female, 3 poles



Female, 4 poles



Part number definition

2	1	3	4	X	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

- 80 Male straight
- 81 Female straight
- 82 Male angled
- 83 Female angled

Connector 2

- 00 No connector
- 80 Male straight
- 81 Female straight
- 82 Male angled
- 83 Female angled

Number of contacts

- 3 3 poles
- 4 4 poles


Cable material

- 80 PVC (3 poles)
- 81 PVC (4 poles)
- 88 PUR (3 poles)
- 89 PUR (4 poles)


Preferred length*

- 005 0.5 m
- 010 1.0 m
- 015 1.5 m
- 020 2.0 m
- 050 5.0 m
- 075 7.5 m
- 100 10.0 m

* Other cable lengths on request!



Male, 4 poles



Female, 4 poles






Technical characteristics

System cables with M8 circular connectors shielded, D-coding


	4 poles	4 poles
	PVC	PUR
Rated voltage	max. 50 V AC/60 V DC	max. 50 V AC/60 V DC
Rated current / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C
Screw locking	M8x1, self securing	M8x1, self securing
Recommended torque	0.4 Nm	0.4 Nm
Temperature range (working and storage)	-30 °C ... +70 °C	-30 °C ... +70 °C
Degree of protection	IP67	IP67
Number of wires / wire gauge	4 x AWG22	4 x AWG22
Conductor insulation	PE (wh, ye, bu, or)	PE (wh, ye, bu, or)
Arrangement of insulated strands	7 x Ø 0.25 mm	7 x Ø 0.25 mm
Sheath	PVC	PUR
Sheath colour	green	green
Outer diameter	Ø 6.20 ± 0.20 mm	Ø 6.20 ± 0.20 mm
Useable as trailing cable	no	yes
Halogen free acc. to	–	IEC 60754
Flame retardant acc. to	UL 1685	IEC 60332-1-2 and UL 2556 VW1
Oil-resistant	IEC 60811-2-1	IEC 60811-2-1 and UL13

Loading-Plan:





Male, 4 poles

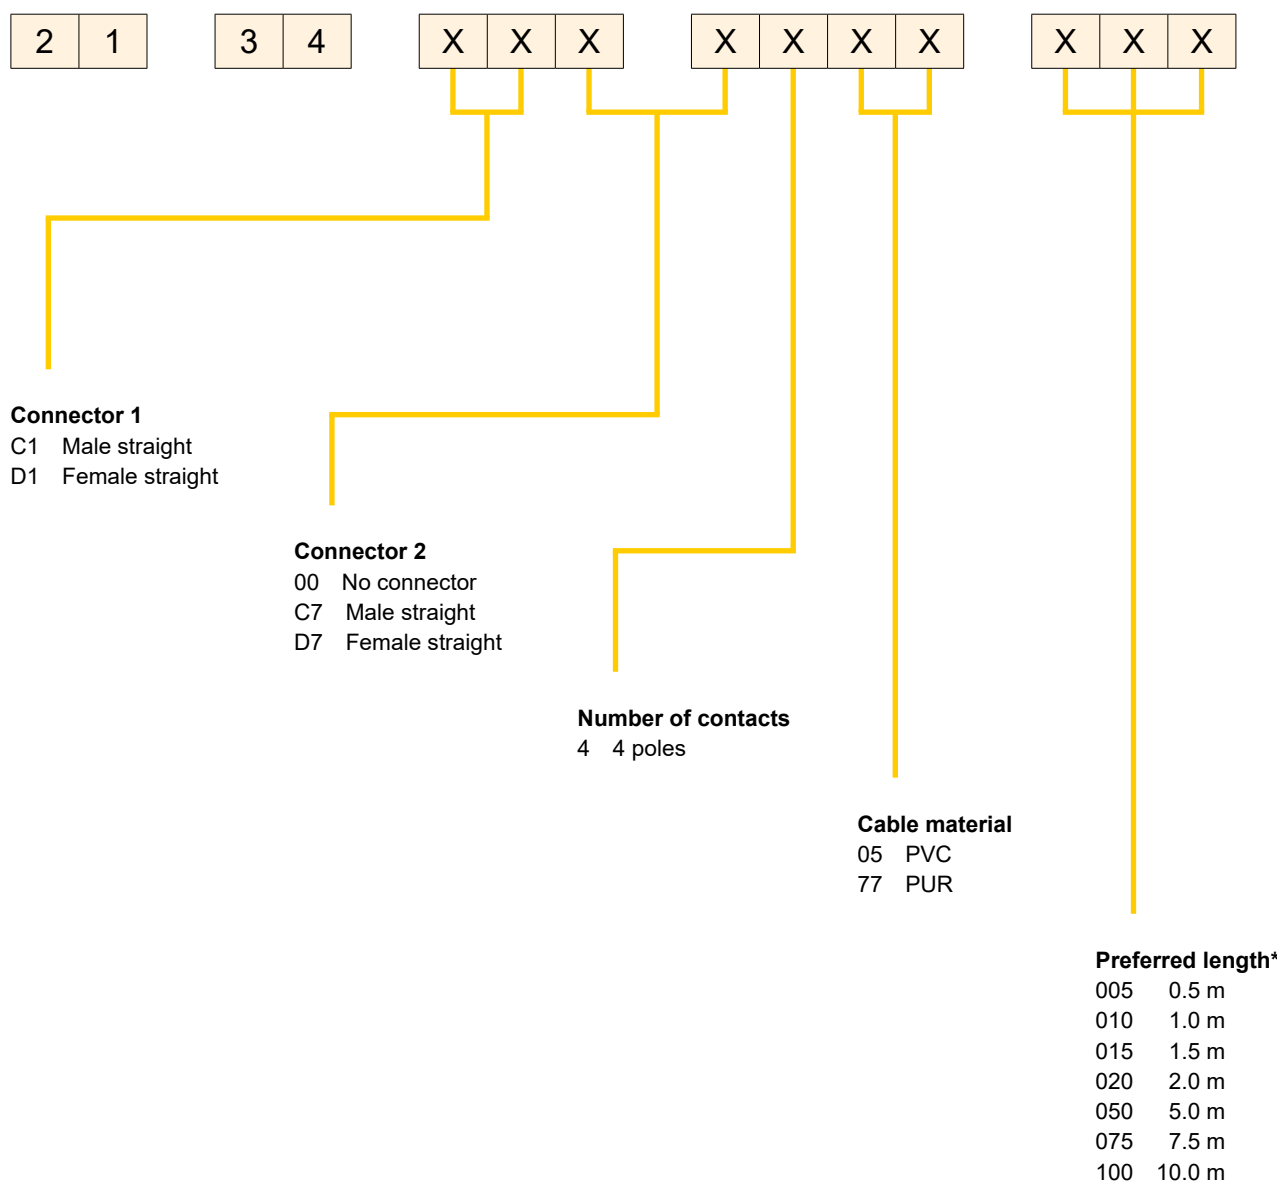


Female, 4 poles



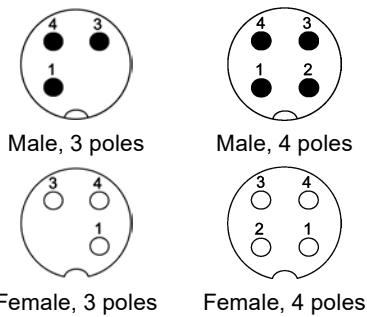
Cable

Part number definition



* Other cable lengths on request!


Cable



Technical characteristics


System cables with M12 circular connectors without PE, A-coding

	3 poles		4 poles	
	PVC	PUR	PVC	PUR
Rated voltage	max. 250 V AC/DC	max. 250 V AC/DC	max. 250 V AC/DC	max. 250 V AC/DC
Rated current / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C	max. 4 A @ +40 °C	max. 4 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	3 x 0.34 mm ²	3 x 0.34 mm ²	4 x 0.34 mm ²	4 x 0.34 mm ²
Conductor insulation	PVC (bn, bu, bk)	PP (bn, bu, bk)	PVC (bn, wh, bu, bk)	PP (bn, wh, bu, bk)
Arrangement of insulated strands	42 x Ø 0.1 mm	42 x Ø 0.1 mm	42 x Ø 0.1 mm	42 x Ø 0.1 mm
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)
Sheath colour	grey	black	grey	black
Outer diameter	Ø 4.4 ± 0.15 mm	Ø 4.4 ± 0.15 mm	Ø 4.7 ± 0.15 mm	Ø 4.7 ± 0.15 mm
Useable as trailing cable	no	yes	no	yes
Halogen free acc. to	–	DIN VDE 0472 part 815	–	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60332-2-2	cUL20549	DIN EN 60332-2-2	cUL20549
Oil-resistant	–	–	–	DIN EN 60811-2-1




Loading-Plan:

- 1 brown
- 2 blue
- 3 black




Loading-Plan:


- 1 brown
- 2 white
- 3 blue
- 4 black




Male, 3 poles



Male, 4 poles



Female, 3 poles



Female, 4 poles



Part number definition

2	1	3	4	X	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Connector 2

- 00 No connector
- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Number of contacts

- 3 3 poles
- 4 4 poles


Cable material

- 83 PVC (3 poles)
- 84 PVC (4 poles)
- 90 PUR (3 poles)
- 91 PUR (4 poles)


Preferred length*

- 005 0.5 m
- 010 1.0 m
- 015 1.5 m
- 020 2.0 m
- 050 5.0 m
- 075 7.5 m
- 100 10.0 m


* Other cable lengths on request!




Male, 5 poles



Male, 8 poles



Female, 5 poles




Female, 8 poles



Technical characteristics


System cables with M12 circular connectors without PE, A-coding

	5 poles	5 poles	8 poles	8 poles
	PVC	PUR	PVC	PUR
Rated voltage	max. 60 V AC/DC	max. 60 V AC/DC	max. 30 V AC/DC	max. 30 V AC/DC
Rated current / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C	max. 2 A @ +40 °C	max. 2 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	5 x 0.34 mm ²	5 x 0.34 mm ²	8 x 0.25 mm ²	8 x 0.25 mm ²
Conductor insulation	PVC (bn, wh, bu, bk, gn/ye)	PP (bn, wh, bu, bk, gn/ye)	PVC (wh, bn, gn, ye, gy, pk, bu, rd)	PP (wh, bn, gn, ye, gy, pk, bu, rd)
Arrangement of insulated strands	42 x Ø 0.1 mm	42 x Ø 0.1 mm	32 x Ø 0.1 mm	32 x Ø 0.1 mm
Sheath	PVC	PUR	PVC	PUR
Sheath colour	grey	black	grey	black
Outer diameter	Ø 5.2 ± 0.15 mm	Ø 5.1 ± 0.15 mm	Ø 6.2 ± 0.2 mm	Ø 6.0 ± 0.2 mm
Useable as trailing cable	no	yes	no	yes
Halogen free acc. to	—	DIN VDE 0472 part 815	—	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60332-2-2	cULus 20549	DIN EN 60332-2-2	cULus 20549
Oil-resistant	—	DIN EN 60811-2-1	—	DIN EN 60811-2-1




Loading-Plan:

- 1 brown
- 2 white
- 3 blue
- 4 black
- 5 green-yellow




Loading-Plan:


- 1 white
- 2 brown
- 3 green
- 4 yellow
- 5 grey
- 6 pink
- 7 blue
- 8 red




Male, 5 poles



Male, 8 poles



Female, 5 poles



Female, 8 poles



Part number definition

2	1	3	4	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Connector 2

- 00 No connector
- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Number of contacts

- 5 5 poles
- 8 8 poles


Cable material

- 70 PUR (8 poles)
- 82 PVC (8 poles)
- 85 PVC (5 poles)
- 92 PUR (5 poles)


Preferred length*

- 005 0.5 m
- 010 1.0 m
- 015 1.5 m
- 020 2.0 m
- 050 5.0 m
- 075 7.5 m
- 100 10.0 m

* Other cable lengths on request!



Male, 12 poles




Female, 12 poles




Technical characteristics


System cables with M12 circular connectors without PE, A-coding

	12 poles	
	PVC	PUR
Rated voltage	max. 30 V AC/DC	max. 30 V AC/DC
Rated current / contact	max. 1.5 A @ +40 °C	max. 1.5 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67
Number of wires / wire gauge	12 x 0.14 mm ²	12 x 0.14 mm ²
Conductor insulation	PVC (wh, bu, bn, gy, rd, bk, ye, pk, gn, vt, rd/bu, gy/pk)	PP (wh, bu, bn, gy, rd, bk, ye, pk, gn, vt, rd/bu, gy/pk)
Arrangement of insulated strands	18 x Ø 0.1 mm	18 x Ø 0.1 mm
Sheath	PVC	PUR (UL, CSA)
Sheath colour	grey	black
Outer diameter	Ø 6.2 ± 0.2 mm	Ø 6.1 ± 0.2 mm
Useable as trailing cable	no	yes
Halogen free acc. to	-	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60332-1-2	cUL20549
Oil-resistant	DIN EN 60811-2-1	-





Male, 12 poles



Female, 12 poles



Cable

Part number definition

2	1	3	4	X	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Connector 2

- 00 No connector
- 84 Male straight
- 85 Female straight
- 86 Male angled
- 87 Female angled

Number of contacts

C 12 poles

Cable material


- 78 PUR
- 79 PVC

Preferred length*


- 005 0.5 m
- 010 1.0 m
- 015 1.5 m
- 020 2.0 m
- 050 5.0 m
- 075 7.5 m
- 100 10.0 m

* Other cable lengths on request!

Cable



Male, 4 poles



Female, 4 poles

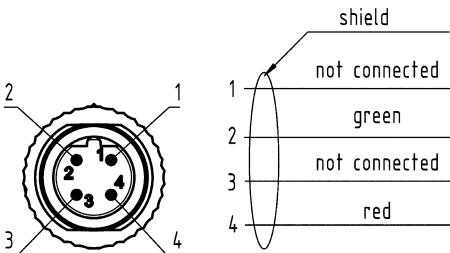



Technical characteristics

System cables with M12 circular connectors shielded, B-coding


	4 poles	
	PVC	PUR
Rated voltage	max. 160 V AC/DC	max. 160 V AC/DC
Rated current / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67
Number of wires / wire gauge	2 x AWG 22	2 x AWG 24
Conductor insulation	PVC (rd, gn)	PE (rd, gn)
Arrangement of insulated strands	1 x Ø 0.65 mm	19 x Ø 0.14 mm
Sheath	PVC	PUR (UL, CSA)
Sheath colour	violet	violet
Outer diameter	Ø 8.0 ± 0.4 mm	Ø 8.5 ± 0.4 mm
Useable as trailing cable	no	yes
Halogen free acc. to	–	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60 332-1-2	DIN EN 60 332-1-2
Oil-resistant	IEC 80811-2-1 (4h/60°C)	DIN EN 60811-2-1

Loading-Plan:





Male, 4 poles

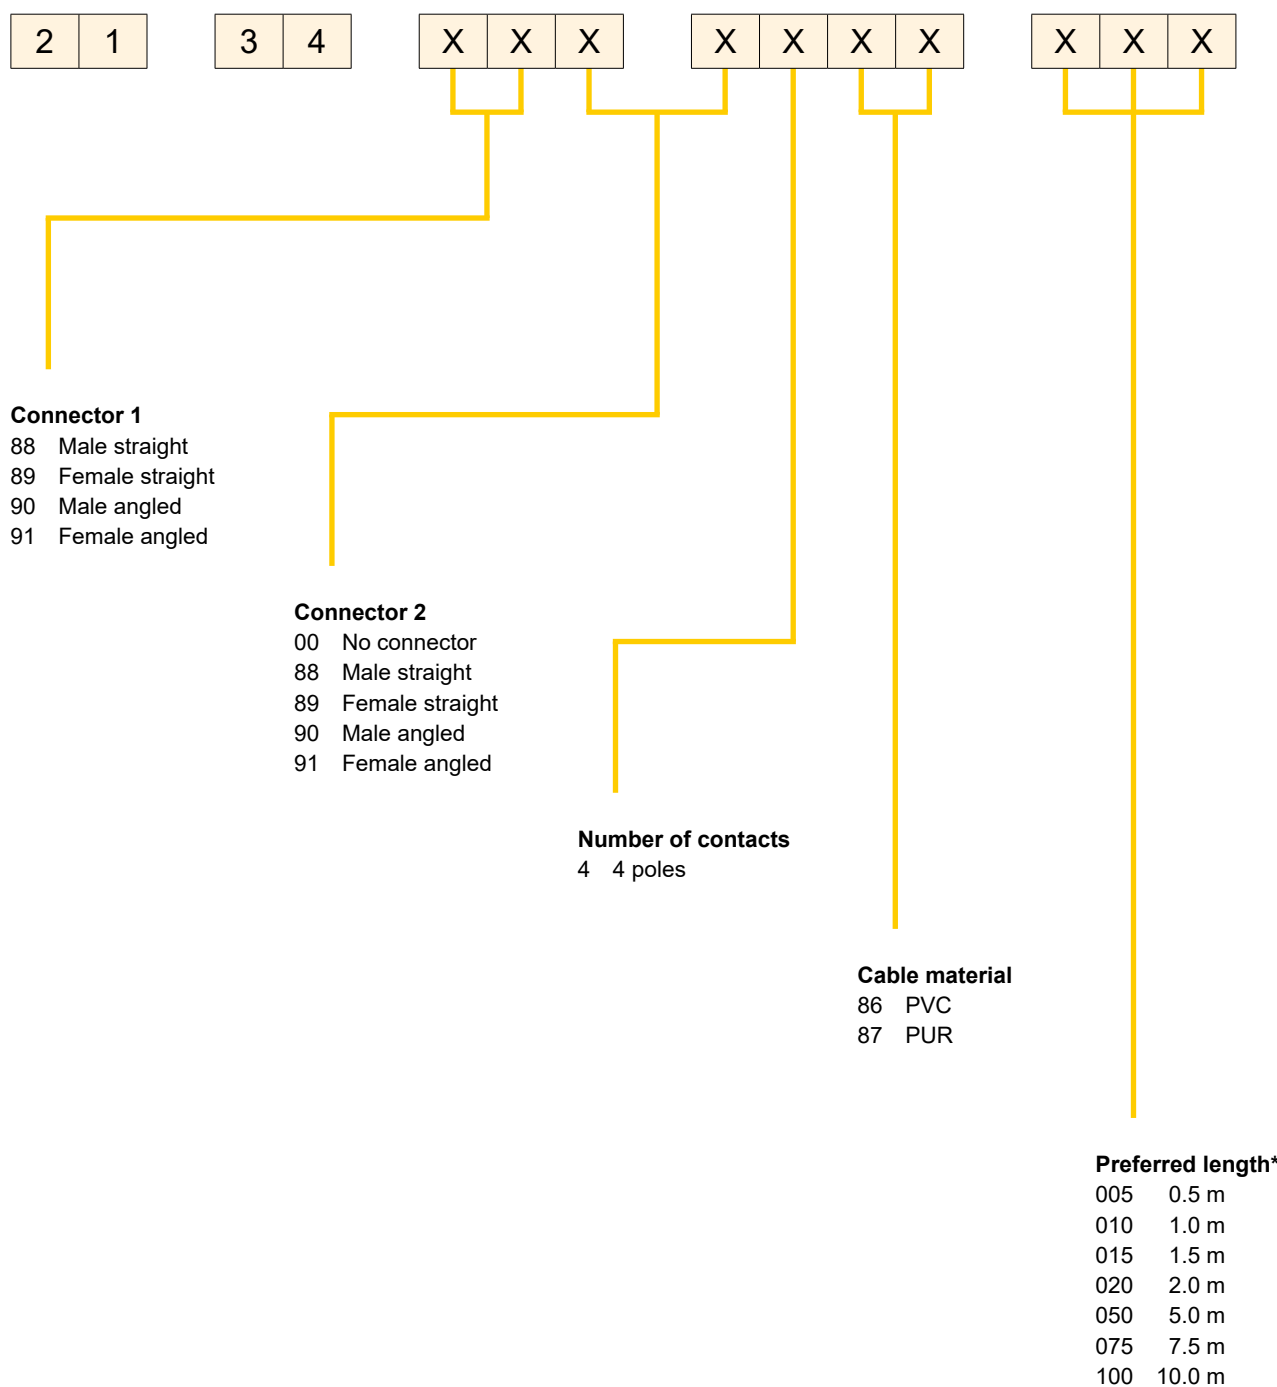


Female, 4 poles




Cable


Part number definition



* Other cable lengths on request!



Male, 4 poles




Female, 4 poles




Technical characteristics


System cables with M12 circular connectors shielded, D-coding

	4 poles	
	PVC	PUR
Rated voltage	max. 160 V AC/DC	max. 160 V AC/DC
Rated current / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67
Number of wires / wire gauge	4 x AWG 22	4 x AWG 22
Conductor insulation	PE (ye, wh, og, bu)	PE (ye, wh, og, bu)
Arrangement of insulated strands	7 x Ø 0.25 mm (AWG 22)	7 x Ø 0.25 mm (AWG 22)
Sheath	PVC	PUR (UL, CSA)
Sheath colour	green	green
Outer diameter	Ø 6.5 ± 0.2 mm	Ø 6.5 ± 0.2 mm
Useable as trailing cable	no	yes
Halogen free acc. to	–	IEC 60754
Flame retardant acc. to	UL 1685 (CSA FT4)	IEC 60332-1-2 und UL 2556 VW1
Oil-resistant	IEC 80811-2-1 (4h/70°C)	IEC 60811-2-1 und UL13




Loading-Plan:





Male, 4 poles

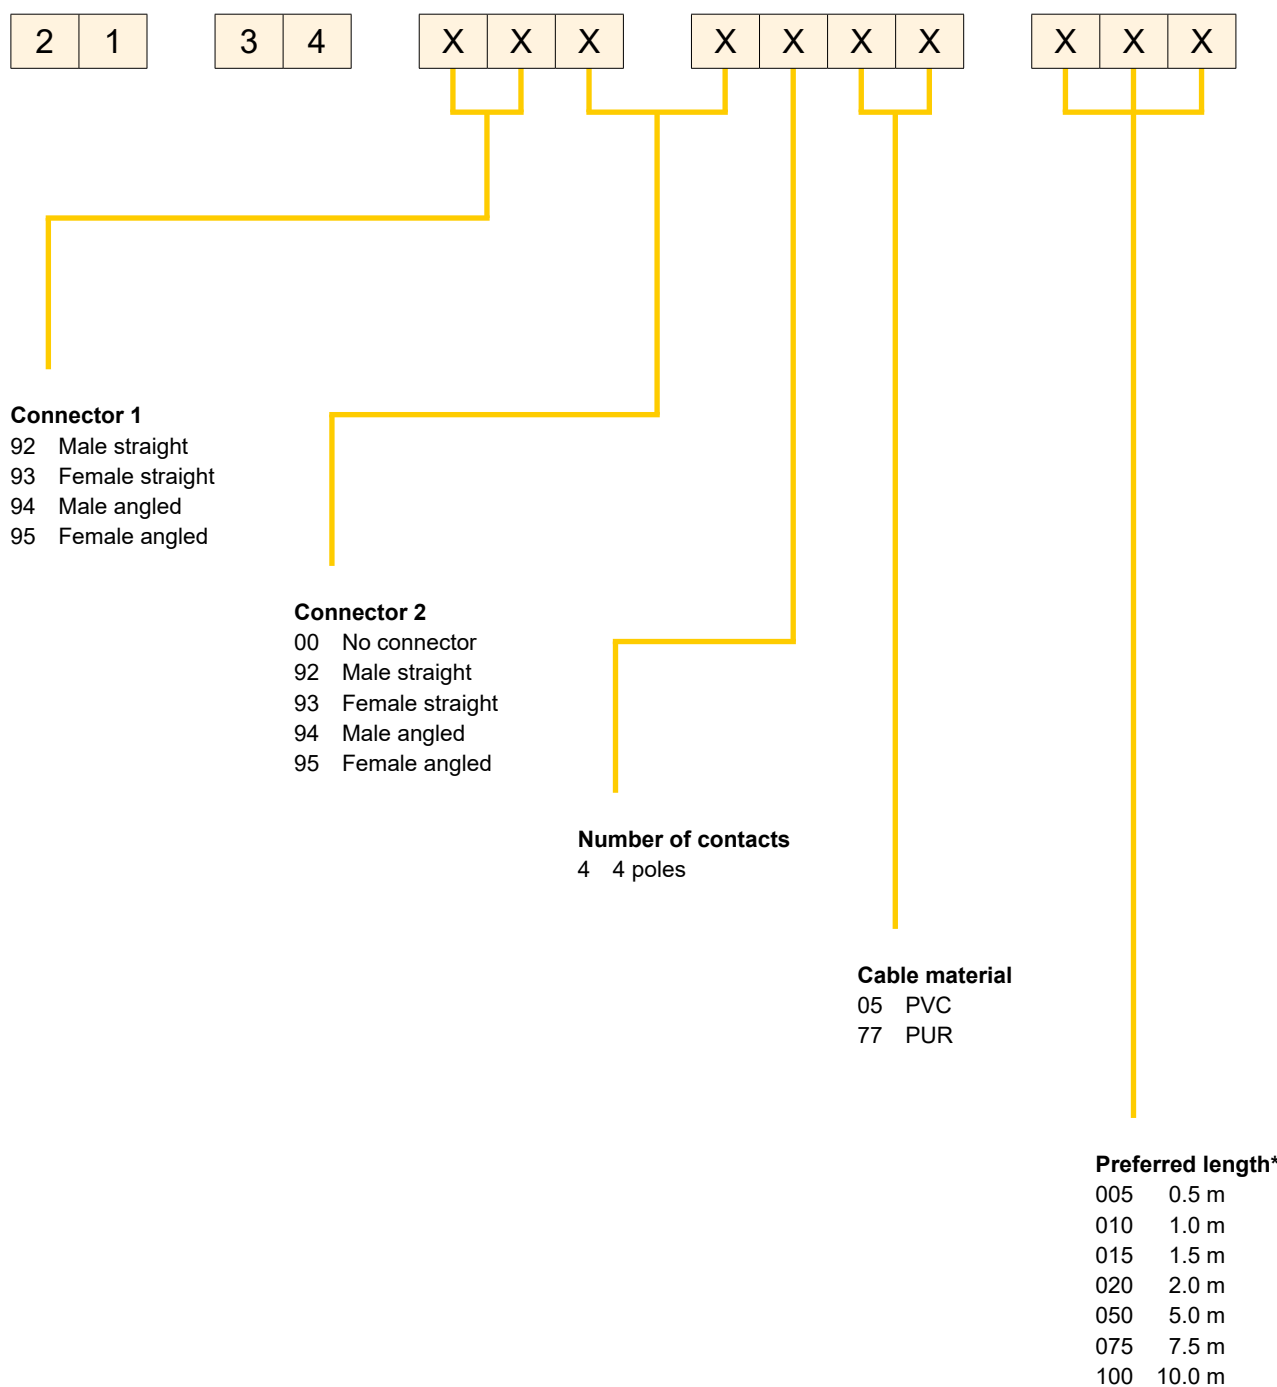


Female, 4 poles



Cable

Part number definition



* Other cable lengths on request!



HARTING M12
system cable, 4-wire, straight resp. angled

Features		Technical characteristics	
• Connector types	M12 D-coding, connector straight resp. angled	Connector types	HARTING M12 D-coding, overmoulded
• Category	Cat. 5	Railway cords type	4 x AWG 22/7, stranded
• Number of wires	4	Sheath material	Elastomer, electron beam cross-linked
• Wiring	1:1	Wiring	4 pole, 1:1
• Sheath material	Elastomer, electron beam cross-linked	Transmission performance	Class D up to 100 MHz acc. to ISO/IEC 11 801, EN 50 173-1
Application		Transmission rate	10/100 Mbit/s
• For harsh industrial environments		Shielding	Fully shielded, 360° shielding contact
• For installation in railway applications		Operating temperature range fix operation	-40 °C ... +85 °C
Benefits		Colour	Black or blue
• Robust design			
• Protection degree IP65/IP67			
• Fire protection acc. to EN 45545-1, -2 and -5			

HARTING M12 system cable, 4-wire, straight resp. angled



Identification	Part number	Drawing	Dimensions in mm
HARTING M12 system cable, 4-wire, straight one side assembled	Black		
Length	0.5 m	09 48 220 0011 005	
	1.0 m	09 48 220 0011 010	
	2.0 m	09 48 220 0011 020	
	2.5 m	09 48 220 0011 025	
	5.0 m	09 48 220 0011 050	
	7.5 m	09 48 220 0011 075	
	10.0 m	09 48 220 0011 100	
	15.0 m	09 48 220 0011 150	
	20.0 m	09 48 220 0011 200	
Length	0.5 m	21 33 390 0413 005	
	1.0 m	21 33 390 0413 010	
	2.0 m	21 33 390 0413 020	
	2.5 m	21 33 390 0413 025	
	5.0 m	21 33 390 0413 050	
	7.5 m	21 33 390 0413 075	
	10.0 m	21 33 390 0413 100	
	15.0 m	21 33 390 0413 150	
	20.0 m	21 33 390 0413 200	
both sides assembled	Black		
Length	0.5 m	09 48 222 2011 005	
	1.0 m	09 48 222 2011 010	
	2.0 m	09 48 222 2011 020	
	2.5 m	09 48 222 2011 025	
	5.0 m	09 48 222 2011 050	
	7.5 m	09 48 222 2011 075	
	10.0 m	09 48 222 2011 100	
	15.0 m	09 48 222 2011 150	
	20.0 m	09 48 222 2011 200	

Other cable lengths on request!

M12 system cables D-coding



Cable



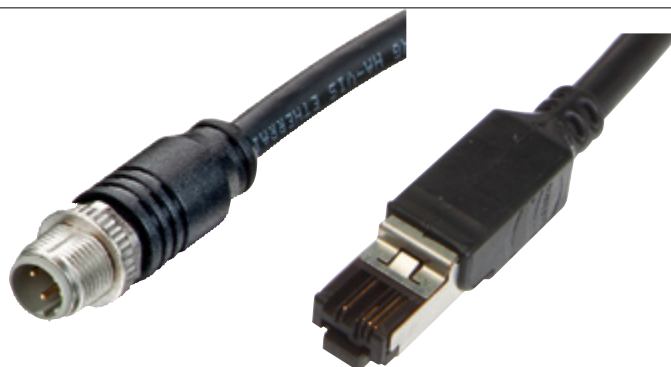
HARTING M12 system cable, 4-wire, straight resp. angled

Identification	Part number	Drawing	Dimensions in mm
HARTING M12 system cable, 4-wire, angled one side assembled	Black		
both sides assembled	Black		

CAB
03
·
18

Other cable lengths on request!

HARTING M12/RJ45 system cable, 4-wire, straight



Identification		Part number	Drawing	Dimensions in mm
HARTING M12/RJ45 system cable, 4-wire both sides assembled		Black	Side view dimensions: 56 (M12 connector), 49 (RJ45 connector), 18 (RJ45 tail), 10 (M12 tail), 14 (RJ45 tail), 17 (RJ45 tail), 14 (RJ45 tail). End view dimensions: 14 (RJ45 tail), 17 (RJ45 tail), 14 (RJ45 tail). Pinout: Shield, yellow, orange, white, blue. Protection level: IP20 Protection level: IP67	
Length	1.0 m	09 48 022 2011 010		
	1.5 m	09 48 022 2011 015		
	2.0 m	09 48 022 2011 020		
	3.0 m	09 48 022 2011 030		
	5.0 m	09 48 022 2011 050		
	7.5 m	09 48 022 2011 075		
	10.0 m	09 48 022 2011 100		
	15.0 m	09 48 022 2011 150		
	20.0 m	09 48 022 2011 200		

Other cable lengths on request!



HARTING M12
system cable, 4-wire, straight, PushPull Press & Go

Features

- Connector types M12 D-coding PushPull
- Category Cat. 5
- Number of wires 4
- Wiring 1:1
- Sheath material Elastomer, electron beam cross-linked

Application

- For harsh industrial environments
- For installation in railway applications

Benefits

- Robust design
- Protection degree IP65/IP67
- Fire protection acc. to EN 45545-1, -2 and -5
- M12 PushPull for a fast and vibration-free connection

Technical characteristics

- Connector types HARTING M12 D-coding PushPull
- Railway cords type 4 x AWG 22/7, stranded
- Sheath material Elastomer, electron beam cross-linked
- Wiring 4 pole, 1:1
- Transmission performance Class D up to 100 MHz acc. to ISO/IEC 11801, EN 50 173-1
- Transmission rate 10/100 Mbit/s
- Shielding Fully shielded, 360° shielding contact
- Operating temperature range fix operation -40 °C ... +85 °C
- Colour Black

Identification

Part number

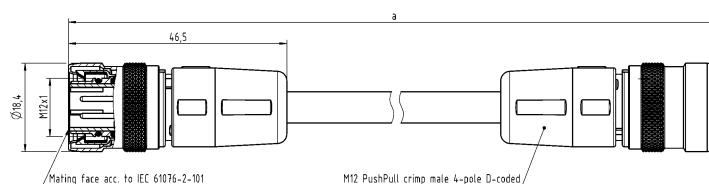
Drawing

Dimensions in mm

HARTING
M12 system cable, 4-wire
both sides assembled

Black

Length	1.0 m	21 33 232 3401 010
	1.5 m	21 33 232 3401 015
	2.0 m	21 33 232 3401 020
	3.0 m	21 33 232 3401 030
	5.0 m	21 33 232 3401 050
	10.0 m	21 33 232 3401 100





Press & Go M12
system cable, 8-wire, Cat. 6_A

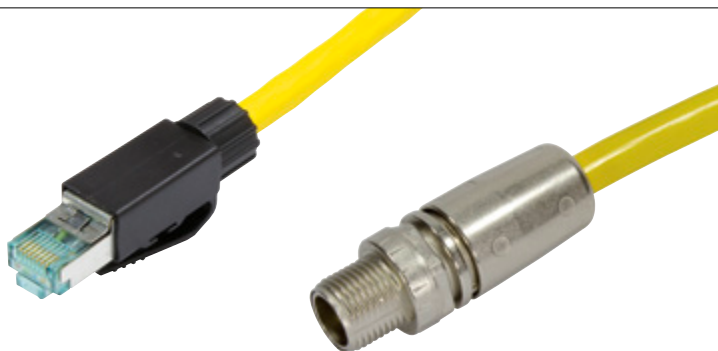
Features		Technical characteristics	
• Connector types	M12 X-coding	Connector types	Press & Go M12 connector X coding acc. to IEC 61076-2-109
• Category	Cat. 6 _A		
• Number of wires	8	Cable types	PVC: 4 x 2 x AWG 26/7, cat. 6 _A , S/FTP, shielded PUR: 4 x 2 x AWG 26/7, cat. 7, S/FTP, shielded
• Wiring	1:1		
• Sheath material	PVC/PUR		
Application		Sheath material	PVC/PUR
• Industrial cabling IP65/IP67		Wiring	8 pole, 1:1
• Transmission up to 10 Gbit/s			
• Camera systems		Transmission performance	Category 6 _A , Class E _A up to 500 MHz acc. to ISO/IEC 11801, EN 50173-1
Benefits		Transmission rate	10/100 Mbit/s 1/ 10 Gbit/s
• Very robust metal housing M12 with degree of protection IP65/IP67		Shielding	Fully shielded, 360° shielding contact
• Vibration proof crimp connection		Operating temperature range	-40 °C ... +70 °C
• Maximum data rates through the configuration of the contacts in conformance with Ethernet technology		Colour	Yellow
• Minimal interaction and perfect shielding through paired shielding of the contacts			
• Fault proof connection through coding of the connector face. A connection error with other 8 pole M12's is impossible			
• PROFINET compliant Type X mating face			
• Oil proof acc. to EN 60811-2-1 (PUR)			



Cable

Press & Go M12
system cable, 8-wire, Cat. 6A

Identification		Part number	
		PUR	PVC
Press & Go M12 system cable, 8-wire one side assembled			
Length	1.0 m	21 33 050 0850 010	21 33 050 0855 010
	2.0 m	21 33 050 0850 020	21 33 050 0855 020
	3.0 m	21 33 050 0850 030	21 33 050 0855 030
	5.0 m	21 33 050 0850 050	21 33 050 0855 050
	10.0 m	21 33 050 0850 100	21 33 050 0855 100
both sides assembled			
Length	1.0 m	21 33 050 5850 010	21 33 050 5855 010
	2.0 m	21 33 050 5850 020	21 33 050 5855 020
	3.0 m	21 33 050 5850 030	21 33 050 5855 030
	5.0 m	21 33 050 5850 050	21 33 050 5855 050
	10.0 m	21 33 050 5850 100	21 33 050 5855 100



M12/RJ45
system cable, 8-wire, Cat. 6_A

Features

- Connector types M12 X-coding to RJ45
- Category Cat. 6_A
- Number of wires 8
- Wiring 1:1
- Sheath material PVC/PUR

Application

- Industrial cabling IP65/IP67
- Transmission up to 10 Gbit/s
- Camera systems

Benefits


- Very robust metal housing M12 with degree of protection IP65
- Vibration proof crimp connection
- Maximum data rates through the configuration of the contacts in conformance with Ethernet technology
- Minimal interaction and perfect shielding through paired shielding of the contacts
- Fault proof connection through coding of the connector face. A connection error with other 8 pole M12's is impossible
- PROFINET compliant Type X mating face

Technical characteristics

- Connector types *har*-speed M12 connector X coding acc. to IEC 61076-2-109 and RJ45 Gigalink
- Cable types 4 x 2 x AWG 26/7, cat. 6_A, S/FTP, shielded
- Sheath material PVC/PUR
- Wiring 8 pole, 1:1
- Transmission performance Category 6_A, Class E_A up to 500 MHz acc. to ISO/IEC 11801, EN 50173-1
- Transmission rate 10/100 Mbit/s
1/ 10 Gbit/s
- Shielding Fully shielded, 360° shielding contact
- Operating temperature range -40 °C ... +70 °C
- Colour Yellow

Identification		Part number	
		PUR	PVC
M12/RJ45 system cable, 8-wire		Yellow	Yellow
Length	0.5 m	09 48 932 3756 005	09 48 932 3757 005
	1.0 m	09 48 932 3756 010	09 48 932 3757 010
	1.5 m	09 48 932 3756 015	09 48 932 3757 015
	2.0 m	09 48 932 3756 020	09 48 932 3757 020
	2.5 m	09 48 932 3756 025	09 48 932 3757 025
	5.0 m	09 48 932 3756 050	09 48 932 3757 050
	7.5 m	09 48 932 3756 075	09 48 932 3757 075
	10.0 m	09 48 932 3756 100	09 48 932 3757 100

Other cable lengths on request!



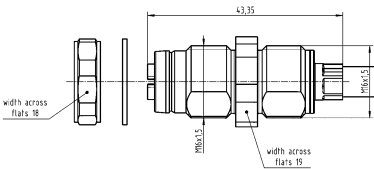
har-speed M12
Panel feed-throughs with cable



Cable

Identification	Part number	Drawing	Dimensions in mm
----------------	-------------	---------	------------------

har-speed M12 PFT with cable



with 0.3 m cable
“Cat. 7_A (2 x AWG 27/7) PIMF”.
Other lengths on request

21 33 080 0850 003

with 0.3 m cable
“HA-VIS EtherRail Cat. 7 4 x (2 x AWG 24/7)”.
Other lengths on request

21 33 070 0853 003



HARTING M12
system cable, 8-wire, straight

Features

- Connector type M12 X-coding
- Category 6_A
- Number of wires 8
- Wire design AWG 24/7
- Wire diameter (8.1 ± 0.4) mm
- Sheath material Elastomer, electron beam cross-linked

Application

- For harsh industrial environments
- For installation in railway applications

Benefits

- Transmission of Gigabit and 10 Gigabit Ethernet acc. IEEE 802.3 and multimedia services
- Fire protection acc. EN 45545-1, -2 and -5, flame retardant and heat resistant acc. DIN 5510 (1-4) and EN 50264-1
- UV resistant, RoHS conform, halogen free LSZH

Technical characteristics

- | | |
|-----------------------------|--|
| Connector types | HARTING M12 X-coding |
| Cable structure | 4 x 2, Twisted Pair, shielded, PIMF |
| Railway cords type | 4 x 2 x AWG 24/7
Category 7, Class F
up to 600 MHz
acc. to ISO/IEC 11801
and EN 50173-1 |
| Sheath material | Elastomer, electron beam,
cross-linked |
| Cable sheath diameter | (8.1 ± 0.4) mm |
| Transmission performance | Category 6 _A , Class E _A
up to 500 MHz
acc. to ISO/IEC 11801
and EN 50173-1 |
| Transmission rate | 1/10 Gbit/s |
| Shielding | Paired shielded with additional
cable shield |
| Operating temperature range | -40 °C ... +80 °C |
| Colour | Black |

HARTING M12 system cable, 8-wire, straight



Identification	Part number	Drawing	Dimensions in mm
HARTING M12 system cable, 8-wire, Slim Design both sides assembled	Black Length 0.5 m 21 33 010 1853 005 1.0 m 21 33 010 1853 010 2.0 m 21 33 010 1853 020 2.5 m 21 33 010 1853 025 5.0 m 21 33 010 1853 050 7.5 m 21 33 010 1853 075 10.0 m 21 33 010 1853 100 15.0 m 21 33 010 1853 150 20.0 m 21 33 010 1853 200		
HARTING M12 system cable, 8-wire, Press & Go one side assembled	Black Length 0.5 m 21 33 050 0853 005 1.0 m 21 33 050 0853 010 2.0 m 21 33 050 0853 020 2.5 m 21 33 050 0853 025 5.0 m 21 33 050 0853 050 7.5 m 21 33 050 0853 075 10.0 m 21 33 050 0853 100 15.0 m 21 33 050 0853 150 20.0 m 21 33 050 0853 200		
both sides assembled	Black Length 0.5 m 21 33 050 5853 005 1.0 m 21 33 050 5853 010 2.0 m 21 33 050 5853 020 2.5 m 21 33 050 5853 025 5.0 m 21 33 050 5853 050 7.5 m 21 33 050 5853 075 10.0 m 21 33 050 5853 100 15.0 m 21 33 050 5853 150 20.0 m 21 33 050 5853 200		

Other cable lengths on request!



Cable




HARTING M12
system cable, 8-wire, straight, PushPull Press & Go

Features		Technical characteristics	
• Connector type	M12 X-coding PushPull	Connector types	HARTING M12 X-coding PushPull
• Category	6 _A	Cable structure	4 x 2, Twisted Pair, shielded, PIMF
• Number of wires	8	Railway cords type	4 x 2 x AWG 24/7 Category 7, Class F up to 600 MHz acc. to ISO/IEC 11801 and EN 50 173-1
• Wire design	AWG 24/7	Sheath material	Elastomer, electron beam, cross-linked
• Wire diameter	(8.1 ± 0.4) mm	Cable sheath diameter	(8.1 ± 0.4) mm
• Sheath material	Elastomer, electron beam cross-linked	Transmission performance	Category 6 _A , Class E _A up to 500 MHz acc. to ISO/IEC 11801 and EN 50 173-1
Application		Transmission rate	1/10 Gbit/s
• For harsh industrial environments		Shielding	Paired shielded with additional cable shield
• For installation in railway applications		Operating temperature range	-40 °C ... +80 °C
Benefits		Colour	Black
• Transmission of Gigabit and 10 Gigabit Ethernet acc. IEEE 802.3 and multimedia services			
• Fire protection acc. EN 45545-1, -2 and -5, flame retardant and heat resistant acc. DIN 5510 (1-4) and EN 50264-1			
• UV resistant, RoHS conform, halogen free LSZH			
• M12 PushPull for a fast and vibration-free connection			




HARTING M12 system cable, 8-wire, straight, PushPull Press & Go

Identification	Part number PVC	Drawing	Dimensions in mm
HARTING M12 system cable, 8-wire, PushPull Press & Go one side assembled	Black		
both sides assembled	Black		



Male, 4 + FE




Female, 4 + FE



Technical characteristics


System cables with M12 circular connectors with FE, L-coding

	5 poles	5 poles	5 poles	5 poles
	PVC	PVC	PVC shielded	PVC shielded
Rated voltage	max. 63 V AC/DC	max. 63 V AC/DC	max. 63 V AC/DC	max. 63 V AC/DC
Rated current / contact	max. 16 A	max. 16 A	max. 16 A	max. 16 A
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
Temperature range connector (working and storage)	-5 °C ... +50 °C	-5 °C ... +50 °C	-5 °C ... +50 °C	-5 °C ... +50 °C
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	5 x 1.5 mm ²	5 x 2.5 mm ²	5 x 1.5 mm ²	5 x 2.5 mm ²
Conductor insulation	PVC	PVC	PVC	PVC
Sheath	PVC	PVC	PVC	PVC
Sheath colour	grey	grey	grey	grey
Outer diameter	Ø 8.3 mm	Ø 10.1 mm	Ø 9.2 mm	Ø 11.0 mm
Temperature range cable (flexible / fixed)	-15 °C ... +80 °C -40 °C ... +80 °C	-15 °C ... +80 °C -40 °C ... +80 °C	-10 °C ... +80 °C -40 °C ... +80 °C	-10 °C ... +80 °C -40 °C ... +80 °C
Useable as trailing cable	no	no	no	no
Halogen free acc. to	no	no	no	no
Flame retardant acc. to	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-1-2
Oil-resistant	yes	yes	yes	yes




Loading-Plan:

1	wire 1	1
2	wire 2	2
3	wire 3	3
4	wire 4	4
FE	wire 5	FE




Loading-Plan:

Shield		
1	wire 1	1
2	wire 2	2
3	wire 3	3
4	wire 4	4
FE	wire 5	FE



Male, 4 + FE



Female, 4 + FE



Cable

Part number definition

2	1	3	3	X	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

A8 Male straight
A7 Female straight

Connector 2

00 No connector
A8 Male straight
A7 Female straight

Number of contacts
5 4 + FE

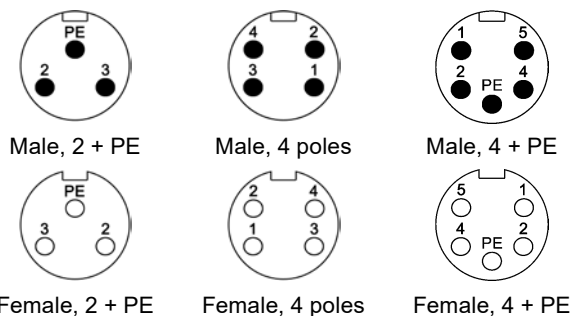
Cable material

18 PVC shielded
(5 x 1.5 mm²)
19 PVC shielded
(5 x 2.5 mm²)
23 PVC (5 x 1.5 mm²)
24 PVC (5 x 2.5 mm²)

Preferred length*

005 0.5 m
010 1.0 m
015 1.5 m
020 2.0 m
050 5.0 m
075 7.5 m
100 10.0 m


* Other cable lengths on request!




Technical characteristics

7/8" system cables


	3 poles (2+PE)		4 poles		5 poles (4+PE)	
	PVC	PUR	PVC	PUR	PVC	PUR
Rated voltage	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC
Rated current / contact	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C
Screw locking	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing
Temperature range (working and storage)	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C	-30 °C ... +80 °C
Degree of protection	IP67	IP67	IP67	IP67	IP67	IP67
Number of wires / wire gauge	3 x 1.5 mm ²	3 x 1.5 mm ²	4 x 1.5 mm ²	4 x 1.5 mm ²	5 x 1.5 mm ²	5 x 1.5 mm ²
Conductor insulation	PVC (bn, bu, gn/ye)	PP (bn, bu, gn/ye)	PVC (bn, wh, bu, bk)	PP (bn, wh, bu, bk)	PVC (bu, bk, wh, bn, gn/ye)	PP (bu, bk, wh, bn, gn/ye)
Arrangement of insulated strands	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)
Sheath colour	grey	black	grey	black	grey	black
Outer diameter	Ø 7.0 ± 0.2 mm	Ø 7.0 ± 0.2 mm	Ø 7.8 ± 0.2 mm	Ø 7.1 ± 0.2 mm	Ø 8.5 ± 0.2 mm	Ø 7.8 ± 0.2 mm
Useable as trailing cable	no	yes	no	yes	no	yes
Halogen free acc. to	—	DIN VDE 0472 part 815	—	DIN VDE 0472 part 815	—	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60332-1-2	DIN EN 60332-1-2	DIN EN 60332-1-2	cUL20549	DIN EN 60332-1-2	cUL20549
Oil-resistant	IEC 60811-2-1	DIN EN 60811-2-1	—	—	—	—




Male, 2 + PE




Male, 4 poles




Male, 4 + PE



Female, 2 + PE



Female, 4 poles



Female, 4 + PE



Part number definition

2	1	3	4	X	X	X	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Connector 1

- 96 Male straight
- 97 Female straight
- 98 Male angled
- 99 Female angled

Connector 2

- 00 No connector
- 96 Male straight
- 97 Female straight
- 98 Male angled
- 99 Female angled

Number of contacts

- 3 2 + PE
- 4 4 poles
- 5 4 + PE

Cable material

- 93 PVC (2 + PE)
- 94 PUR (2 + PE)
- 95 PVC (4 poles)
- 96 PUR (4 poles)
- 97 PVC (4 + PE)
- 98 PUR (4 + PE)

Preferred length*

- 005 0.5 m
- 010 1.0 m
- 015 1.5 m
- 020 2.0 m
- 050 5.0 m
- 075 7.5 m
- 100 10.0 m

* Other cable lengths on request!



M23 signal
encoder cable, straight, screw, ComLock, ComLock-S

Features		Technical characteristics	
• Connector type	M23 signal D-Sub male, angled	Cable structure	Copper conductor in acc. to DIN VDE 0295 cl. 6 Fine wire BS 6360 cl. 6 IEC 60228 cl. 6
• Locking type	Screw ComLock ComLock-S	Core structure	3 x (2 x 0.14) mm ² + (2 x 0.5) mm ²
• Number of contacts	M23: 12 D-Sub: 9	Sheath material	PUR
• Degree of protection	IP65 / IP67 when mated	Cable sheath diameter	9.8 mm
Application		Shielding	4 shielded pairs
• For harsh industrial environments • For servo drives • Standard in acc. to Lenze		Temperature range moved fixed	-30 °C ... +80 °C -40 °C ... +80 °C
Benefits		Bending radius moved fixed	10 x cable diameter 6 x cable diameter
• 360° shielding • Cables suitable for industry • Drag chain compatible • Fast lock technology ComLock-S compatible with Speedtec locking • EMC conform		Colour	Black
		System	Lenze

M23 signal encoder cable, straight, screw, ComLock, ComLock-S



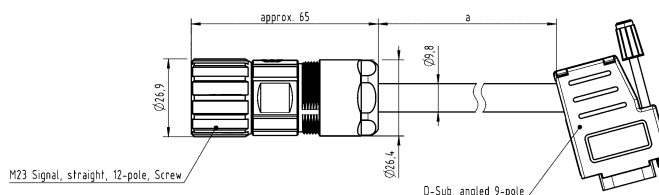
Identification	Part number	Drawing	Dimensions in mm
----------------	-------------	---------	------------------

Encoder cable,
M23, 12 pole,
straight, female to
D-Sub, 9 pole, angled,
male

Screw

Length 5.0 m
7.5 m
10.0 m
15.0 m

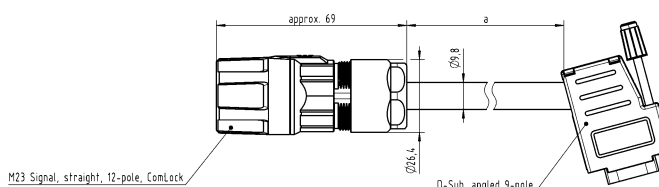
09 48 A06 0847 050
09 48 A06 0847 075
09 48 A06 0847 100
09 48 A06 0847 150



ComLock (fast locking hood
for M23 signal)

Length 5.0 m
7.5 m
10.0 m
15.0 m

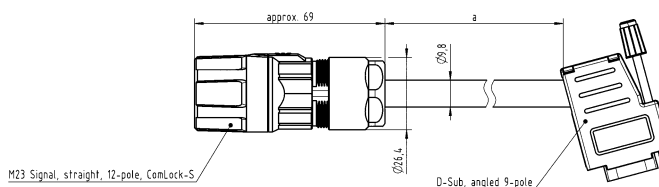
09 48 A16 0847 050
09 48 A16 0847 075
09 48 A16 0847 100
09 48 A16 0847 150



ComLock-S (fast locking hood
for Speedtec products)

Length 5.0 m
7.5 m
10.0 m
15.0 m

09 48 A26 0847 050
09 48 A26 0847 075
09 48 A26 0847 100
09 48 A26 0847 150



Pin Conn. Loc. A	Wire	Signal	Pin Conn. Loc. B
1	yellow	pair	+Ref 1
2	green		-Ref 2
3	n.c.		+VCC ETS 3
4	grey	pair	+COS 4
5	pink		-COS 5
6	red	pair	+SIN 6
7	blue		-SIN 7
8			
9			
10		n.c.	
11	white	pair	+KTY 8
12	brown		-KTY 9
Shield	Shield		Shield

Cable



M23 power
motor cable, straight, screw, ComLock, ComLock-S

Features

• Connector type	M23 power
• Locking type	Screw ComLock ComLock-S
• Number of contacts	5 + PE
• Degree of protection	IP65 / IP67 when mated

Application

- For harsh industrial environments
- For servo drives
- Standard in acc. to Lenze

Benefits

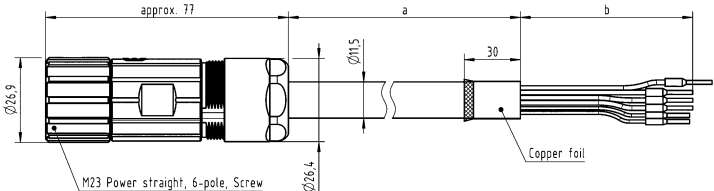
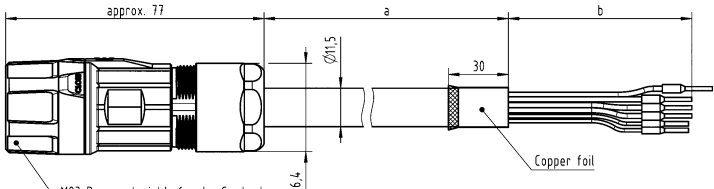
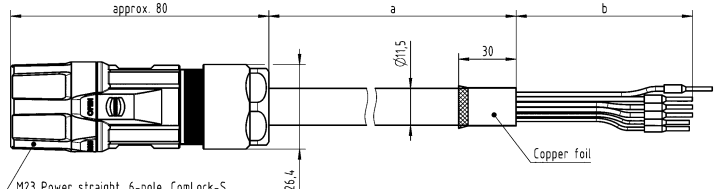
- 360° shielding
- Cables suitable for industry
- Drag chain compatible
- Fast lock technology ComLock-S compatible with Speedtec locking
- EMC conform

Technical characteristics

Cable structure	Copper conductor in acc. to DIN VDE 0295 cl. 6 Fine wire IEC 60228 cl. 6
Core structure	(4 x 1.5 + (2 x 0.5)) mm ²
Sheath material	PUR
Cable sheath diameter	11.5 mm
Shielding	Shielded pair for the control unit and additional overall cable shielding
Temperature range moved fixed	-30 °C ... +80 °C -40 °C ... +90 °C
Bending radius moved fixed	7.5 x cable diameter 6 x cable diameter
Colour	Orange
System	Lenze



M23 power motor cable, straight, screw, ComLock, ComLock-S

Identification	Part number	Drawing	Dimensions in mm																																								
Motor cable, M23, 5 + PE, straight, female																																											
Screw																																											
Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 010 0637 050 21 37 010 0637 075 21 37 010 0637 100 21 37 010 0637 150																																										
ComLock (fast locking hood for M23 signal)																																											
Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 020 0637 050 21 37 020 0637 075 21 37 020 0637 100 21 37 020 0637 150																																										
ComLock-S (fast locking hood for Speedtec products)																																											
Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 030 0637 050 21 37 030 0637 075 21 37 030 0637 100 21 37 030 0637 150		<table><tr><th>Pin Conn. Loc. A</th><th>Wire</th><th>Signal</th><th>Length b [m]</th><th>Pin Conn. Loc. B</th></tr><tr><td>1</td><td>white</td><td>BD1+</td><td>0.2</td><td>Terminal DIN 46228-4 0.5mm²</td></tr><tr><td>2</td><td>brown</td><td>BD-</td><td>0.2</td><td>Terminal DIN 46228-4 0.5mm²</td></tr><tr><td>4</td><td>1</td><td>U</td><td>0.2</td><td>Terminal DIN 46228-4 1.5mm²</td></tr><tr><td>5</td><td>2</td><td>V</td><td>0.2</td><td>Terminal DIN 46228-4 1.5mm²</td></tr><tr><td>6</td><td>3</td><td>W</td><td>0.2</td><td>Terminal DIN 46228-4 1.5mm²</td></tr><tr><td>PE (3)</td><td>green/yellow</td><td>PE</td><td>0.22</td><td>Terminal DIN 46228-4 1.5mm²</td></tr><tr><td>Shield</td><td>Shield</td><td></td><td></td><td></td></tr></table>	Pin Conn. Loc. A	Wire	Signal	Length b [m]	Pin Conn. Loc. B	1	white	BD1+	0.2	Terminal DIN 46228-4 0.5mm²	2	brown	BD-	0.2	Terminal DIN 46228-4 0.5mm²	4	1	U	0.2	Terminal DIN 46228-4 1.5mm²	5	2	V	0.2	Terminal DIN 46228-4 1.5mm²	6	3	W	0.2	Terminal DIN 46228-4 1.5mm²	PE (3)	green/yellow	PE	0.22	Terminal DIN 46228-4 1.5mm²	Shield	Shield			
Pin Conn. Loc. A	Wire	Signal	Length b [m]	Pin Conn. Loc. B																																							
1	white	BD1+	0.2	Terminal DIN 46228-4 0.5mm²																																							
2	brown	BD-	0.2	Terminal DIN 46228-4 0.5mm²																																							
4	1	U	0.2	Terminal DIN 46228-4 1.5mm²																																							
5	2	V	0.2	Terminal DIN 46228-4 1.5mm²																																							
6	3	W	0.2	Terminal DIN 46228-4 1.5mm²																																							
PE (3)	green/yellow	PE	0.22	Terminal DIN 46228-4 1.5mm²																																							
Shield	Shield																																										

Other cable lengths on request!



Contents

Page

Crimping tool

TOO 03.2

Assembly tool

TOO 03.6

Stripping tools.....

TOO 03.7

Tools

Technical characteristics

RoHS compliant


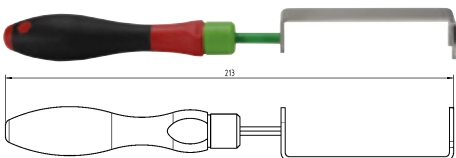
Identification	Conductor cross-section (mm²)	Part number	
Crimping tool, for turned male and female contact, 4 indent crimp in acc. to MIL 22 520/2-01	0.09 ... 0.82	09 99 000 0501	
Locator, for single D-Sub standard contacts		09 99 000 0531	
Locator, for part number 09 99 000 0501 and Data- und Power contacts Y-coding		09 99 000 0618	
Locator, for har-speed M12 male contacts		09 99 000 0525	
Locator, for har-speed M12 female contacts		09 99 000 0635	
Locator, for M12 male contacts, 21 01 100 9020		61 03 600 0023	
Locator, for M12 female contacts, 21 01 100 9025		09 99 000 0637	

Identification	Conductor cross-section (mm ²)	Part number	
Crimping tool, for power contacts	0.5 ... 2.5	09 99 000 0509	
Locator, for part number 09 99 000 0509		09 99 000 0638	

Tools

Identification	Wrench size	Part number	
Crimping tool, for flange Head openable		09 99 000 0647	
Crimping insert, for part number 09 99 000 0647	6.5 7 7.5 8 8.5 9 9.5 10	09 99 000 0652 09 99 000 0648 09 99 000 0649 09 99 000 0650 09 99 000 0658 09 99 000 0653 09 99 000 0654 09 99 000 0655	

Identification	Conductor cross-section (mm ²)	Part number	
Circular connectors M23, Crimping tool, for M23 signal contacts, Pack contents: incl. locator, Handling instruction	0.08 ... 2.5	09 99 000 0890	
Circular connectors M23, Crimping tool, for M23 power contacts, for M23 signal contacts, Pack contents: incl. locator, Handling instruction Not to be used for 0.6 mm contacts.	0.14 ... 4	09 99 000 0896	
Circular connectors M23, Crimping tool, for shielded bushing		09 99 000 0898	
Circular connectors M23, Locator, for 0.6 mm data contacts, for crimping tool 09 99 000 0890		09 99 000 0961	

Identification	Wrench size	Part number	Drawing (dimensions in mm)
Assembly tool, for flange		09 99 000 0639	
Dynamometric screwdriver, for M12 Power	18	09 99 000 0659	
Dynamometric screwdriver, for M8	9 13	09 99 000 0380 09 99 000 0660	
Dynamometric screwdriver, for M12-S	13	09 99 000 0382	
Dynamometric screwdriver, for M12-L	17	09 99 000 0384	
Dynamometric screwdriver, for M12 Slim Design	15	09 99 000 0646	
Dynamometric screwdriver, for 7/8"	22	09 99 000 0395	
Assembly tool, for preLink® terminal module		20 82 000 9901	

Identification	Conductor cross-section (mm ²)	Part number	
Stripping tool	0.08 ... 10	09 99 000 0159	
Stripping tool, Pack contents: Stripping blade set, Straight	0.03 ... 16	09 99 000 0980	
Stripping blade set, Straight		09 99 000 0981	
Stripping blade set, Oval	10 ... 16	09 99 000 0982	
Stripping blade set, V-shape		09 99 000 0983	

Armenia:

refer to Russia

Australia

HARTING Pty. Ltd.
Suite 11 / 2 Enterprise Drive Bundoora
3083, University Hill Melbourne, Victoria
Phone 1800 201 081 (toll free calling
within AUS)
+61 3 9466 7088
au@HARTING.com

Australia and Oceania:

refer to Australia

Austria

HARTING Ges.m.b.H.
Deutschstraße 19
1230 Wien
Phone +43 161 621 21
at@HARTING.com

Azerbaijan:

refer to Turkey

Baltic States:

refer to Finland

Belarus:

refer to Russia

Belgium

HARTING N.V.
Z.3 Doornveld 23
1731 Zellik
Phone +32 2 466 0190
be@HARTING.com

Bosnia Herzegovina:

refer to Austria

Brazil

HARTING Ltda.
Alameda Caiapós, 643
06460-110- Barueri - São Paulo
Phone +55 11 5035 0073
br@HARTING.com

Canada

HARTING Canada Inc.
475 Dumont Avenue
Suite 300
Dorval, Quebec, H9S 5W2
Phone +1 855 659-6653
info.ca@HARTING.com

Central America and the Caribbean:

refer to USA

Central Asia:

refer to Russia

China

HARTING (Zhuhai) Sales Ltd.
Room 3501, Grand Gateway I
No. 1 Hong Qiao Road
Xu Hui District
Shanghai 200030
Phone +86 21 3418 9758
cn@HARTING.com

Croatia:

refer to Austria

Czech Republic

HARTING s.r.o.
Mlýnská 2
160 00 Praha 6
Phone +420 220 380 495
cz@HARTING.com

Denmark

HARTING ApS
Resilience House
Lysholt Allé 8
7100 Vejle
Phone +45 70 25 00 32
dk@HARTING.com

Finland

HARTING Oy
Teknobulevardi 3-5
01530 Vantaa
Phone +358 207 291 510
fi@HARTING.com

France

HARTING France
ZAC Paris Nord 2
181 avenue des Nations
95934 ROISSY CDG
Phone +33 1 4938 3400
fr@HARTING.com

Germany

HARTING Deutschland
GmbH & Co. KG
Simeons carré 1, D-32427 Minden
Phone +49 571 8896 0
de@HARTING.com

Georgia:

refer to Russia

Great Britain

HARTING Limited
Caswell Road
Brackmills Industrial Estate
NN4 7PW GB – Northampton
Phone +44 1604 82 75 00
salesuk@HARTING.com

Greece:

refer to Italy

Hong Kong

HARTING (HK) Limited
Regional Office Asia Pacific
3512, Metroplaza Tower 1
223 Hing Fong Road
Kwai Fong, N. T.
Phone +852 2423 7338
ap@HARTING.com

Hungary

HARTING Magyarország Kft.
Fehérvári út 89-95
1119 Budapest
Phone +36 1 205 34 64
hu@HARTING.com

India

HARTING (India) Private Limited
7th Floor (West Wing)
Central Square II
Unit No.B 19 part, B 20 & 21
TVK Industrial Estate
Guindy, Chennai 600032
Phone +91-44-43560415
in@HARTING.com

Ireland:

refer to Great Britain

Israel:

refer to Turkey

Italy

HARTING S.R.L.
Via dell' Industria 7
20090 Vimodrone (MI)
Phone +39 02 250801
it@HARTING.com

Japan

HARTING K.-K.
Yusen Shin-Yokohama
1 Chome Bldg., 2F 1-7-9,
Shin-Yokohama, Kohoku-ku
Yokohama 222-0033
Phone +81 45 476 3456
jp@HARTING.com

Korean Republic

HARTING Korea Co. Ltd.
B-B108, Woolim Lions Valley 5th
302 Galmachi-ro, Jungwon-gu
Seongnam-si, Gyeonggi-do 13201
Phone +82 31 750 0380
kr@HARTING.com

Kosovo:

refer to Austria

Macedonia:

refer to Austria

Malta:

refer to Italy

Mexico

HARTING Mexico S.A. de C.V.
IOS Torre Virreyes
Pedregal No. 24, Co. Molino Del Rey
Suites 357 A, B, C
Del Miguel Hidalgo, Mexico D.F. 11600
Phone +1 800 123 0415
HARTING.mexico@HARTING.com

Middle East:

refer to United Arab Emirates

Montenegro:

refer to Austria

Netherlands

HARTING B.V.
Larenweg 44
5234 's-Hertogenbosch
Phone +31 736 410 404
nl@HARTING.com

Norway

HARTING A/S
Østensjøveien 36
0667 Oslo
Phone +47 22 700 555
no@HARTING.com

Pakistan:

refer to United Arab Emirates

Poland

HARTING Polska Sp. z o.o.
ul. Duńska 11
54-427 Wrocław
Phone +48 71 352 81 71
pl@HARTING.com

Romania

HARTING Romania SCS
Str. Europa Unita nr 21
550018 Sibiu
Phone +40 369 102 610
ro@HARTING.com

Russia

LLC HARTING
Sverdlovskaya nab., 44, lit. Yu, office 612
195027, St. Petersburg
Phone +7 812 327 6477
ru@HARTING.com

Serbia:

refer to Austria

Singapore

HARTING Singapore Pte. Ltd.
25 International Business Park
#04-108 German Centre
SGP-Singapore 609916
Phone +65 6225 5285
sg@HARTING.com

Slovakia

HARTING s.r.o.
Slovakia branch
Štefániková Trieda 71, (areál pivovaru)
949 01 Nitra
Phone +421 37 655 9089
sk@HARTING.com

Slovenia:

refer to Austria

South Africa

HARTING South Africa Proprietary
Limited
Ground Floor, Twickenham Building
The Campus, Cnr Main & Sloane Street
Bryanston
Johannesburg (Bryanston)
2021
Phone +27 (0) 11 575 0017
za@HARTING.com

South America:

refer to Brazil

South Asia:

refer to Singapore

South Pacific:

refer to Australia

Spain

HARTING Iberia S.A.U.
C/Viriato, 47 8º Planta
Edificio Numancia, 1
08014 Barcelona
Phone +34 933 638 484
es@HARTING.com

Sub-Sahara countries:

refer to South Africa

Sweden

HARTING AB
Gustavslundsvägen 141B
167 51 Bromma
Phone +46 8 445 7171
se@HARTING.com

Switzerland

HARTING AG
Volketswil branch
Hofwiesenstrasse 4 A
8604 Volketswil
Phone +41 44 908 20 60
ch@HARTING.com

Taiwan

HARTING Taiwan Ltd.
Room 1, 5/F, 495 GuangFu South Road
RC-110 Taipei
Phone +886 227 586 177
tw@HARTING.com

Turkey

HARTING Türkiye Elektronik Ticaret
Limited Sirketi
Bayar Cad. Şehit İlknur Keleş Sok.
Dural Plaza No:3 K.11
34742 Kozyatagı – İstanbul
Phone +90 216 688 81 00
tr@HARTING.com

Ukraine:

refer to Poland

United Arab Emirates

HARTING Middle East FZ-LLC
Knowledge Village
Block 2A - Office F72
P.O. Box: 454372
Dubai
Phone +971 4 453 9737
uae@HARTING.com

HARTING Inc. of North America

1370 Bowes Road
USA-Elgin, Illinois 60123
Phone +1 847 741 1500
us@HARTING.com



Pushing Performance

HARTING.com –
the gateway to your
country website.
