
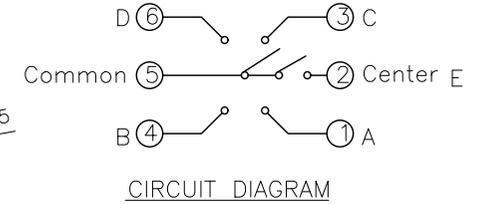
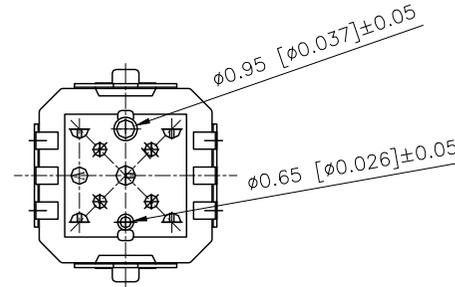
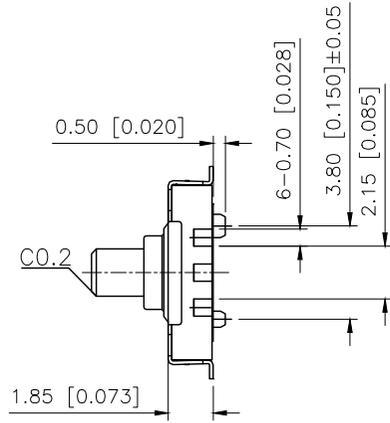




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.25	阿树
A2	ECN-P-2025120601	ⒶX1	产品尺寸, 材质及动作力变更	2025.12.06	阿树

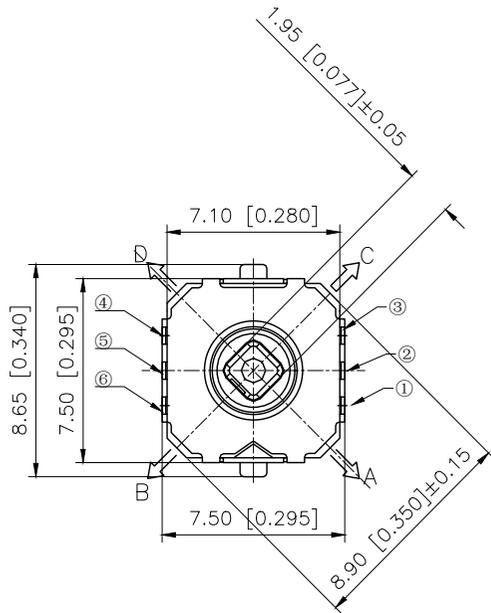

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. center: 0.15±0.10 mm  
around: 0.25±0.20 mm
6. Operating life: 100,000 cycles

PAPT NO	TM-4175-A-A		
Operating force	A	4 Direction Center	180±50gf 250±50gf
	B	4 Direction Center	250±50gf 360±70gf
Height	H:A:5	B:6	

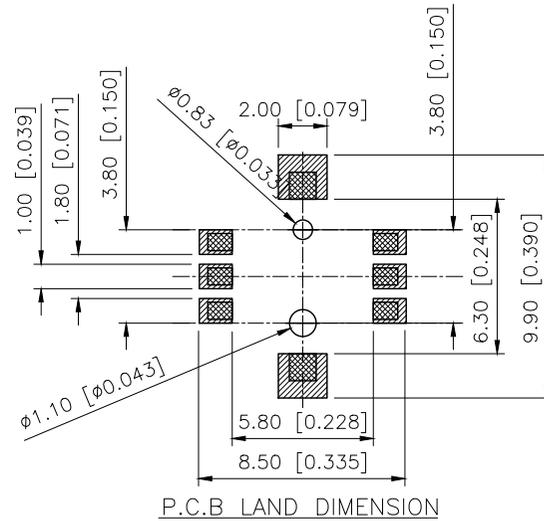

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
⑥	Cover	1	SUS304	Ni Sn plating
⑤	Plum blossom Button(梅花钮)	1	PA	Black
④	Stem	1	LCP	Black
③	Contact form	3	SUS301	Silver coated
②	Housing	1	PA6T	Black
①	Terminal	1	Phosphor copper	Ag Plating

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	MULTI-FUNCTIONAL SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	TM-4175-B-B
APPROVED		SIZE:	A4	DWG NO.:	X-TM-4175-B-B

XKB INDUSTRIAL PRECISION CO., LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A2