


P.C.B LAYOUT

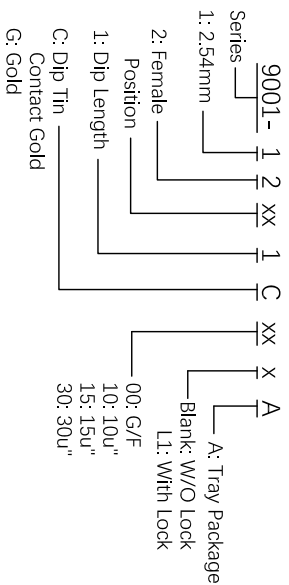

Series	Pitch	Position	Rows with Contacts	Contact Arrange
1: 2.54mm	2.54mm	96	a b c	
2: Female Position		64	d - c	
1: Dip Length		32	d - -	

MATERIAL:
 Housing : PBT UL94V-0 Beige
 Contacts: Copper Alloy
 Lock: Copper Alloy

ELECTRICAL CHARACTERISTICS:
 Current Rating: 2 AMP
 Dielectric Withstanding Voltage:
 AC1000V for 1minute
 Insulator Resistance: 1000MΩ min at DC 500V
 Contact Resistance: 20mΩ max at DC 100mA
 Operating Temperature: -55°C ~ +125°C

MODEL: 9001-12xx1CxxA	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 2.54直母胶芯+直针欧式连接器	CHECKED BY : Liwei	DATE:	X. ±0.30mm X.* ± 3*
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X* ± 2*
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX* ± 1*
	SIZE: A4	DATE:	X.XXX±0.10mm X.XXX ± 0.5*

深圳市吉威电子有限公司
SZJUSTWELL ELECTRONICS CO., LTD

QUADRANT POINT
 TANGERCY POINT
 INTERSECTION POINT

MEASURE POINT:

NO:	PARTICULAR	BY	DATE
REVISIONS			

1 2 3 4 5 6 7 8