

**7A, 650V N-CHANNEL MOSFET**

**GENERAL DESCRIPTION**

These N-Channel enhancement mode power field effect transistors are produced using Hi-semicon's proprietary, planar stripe, DMOS technology.


This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switched mode power supplies, active power factor correction, electronic lamp ballasts based on half bridge topology.

**Features**

- ◆ VDS(V)=650V, ID=7A
- ◆ R<sub>DS(ON)</sub>  
 TYP:1.1Ω@V<sub>GS</sub>=10V I<sub>D</sub>=3.5A  
 MAX:1.4Ω

**Applications**

- ◆ Power faction correction (PFC)
- ◆ Switched mode power supplies (SMPS)
- ◆ Uninterruptible power supply (UPS)
- ◆ LED lighting power

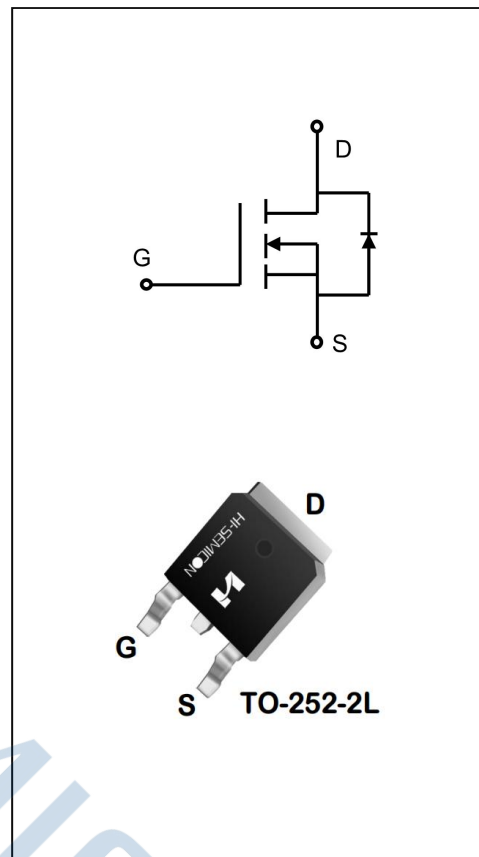

**ORDERING INFORMATION**

Part No.	Package	Marking	Material	Packing
SFD7N65E	TO-252-2L	SFD7N65E	Pb Free	Reel

## ABSOLUTE MAXIMUM RATINGS (T<sub>J</sub>=25°C unless otherwise noted)

Characteristics	Symbol	Ratings	Unit
		SFD7N65E	
Drain-Source Voltage	V <sub>DS</sub>	650	V
Gate-Source Voltage	V <sub>GS</sub>	±30	V
Drain Current	I <sub>D</sub>	T <sub>C</sub> = 25°C	7.0
		T <sub>C</sub> = 100°C	5.6
Drain Current Pulsed (Note 1)	I <sub>DM</sub>	28	A
Power Dissipation(T <sub>C</sub> =25°C) -Derate above 25°C	P <sub>D</sub>	100	W
		0.8	W/°C
Single Pulsed Avalanche Energy (Note 2)	E <sub>AS</sub>	537	mJ
Operation Junction Temperature Range	T <sub>J</sub>	-55~+150	°C
Storage Temperature Range	T <sub>stg</sub>	-55~+150	°C
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	TL	300	°C

## THERMAL CHARACTERISTICS

Characteristics	Symbol	MAX	Unit
		SFD7N65E	
Thermal Resistance, Junction-to-Case	R <sub>θJC</sub>	1.25	°C/W
Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub>	62.5	°C/W

## ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
<b>Off Characteristics</b>						
Drain -Source Breakdown Voltage	B <sub>VDS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	650	700	--	V
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =650V, V <sub>GS</sub> =0V	--	3.3	100	nA
Gate-Source Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =30V, V <sub>DS</sub> =0V	--	3.4	100	nA
Gate-Source Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =-30V, V <sub>DS</sub> =0V	--	-2.1	-100	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> =250μA	2	2.9	4.0	V
Static Drain- Source On State Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =1A	--	1.0	1.38	Ω
		V <sub>GS</sub> =10V, I <sub>D</sub> =3.5A	--	1.1	1.4	Ω
<b>Dynamic Characteristics</b>						
Gate Resistance	R <sub>g</sub>	V <sub>GS</sub> =0V; f=1.0MHZ	1	2.2	10	Ω
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V V <sub>GS</sub> =0V f=1.0MHZ	--	1100	--	pF
Output Capacitance	C <sub>oss</sub>		--	90.5	--	
Reverse Transfer Capacitance	C <sub>rss</sub>		--	4.9	--	pF
<b>Switching Characteristics</b>						
Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> =325V; V <sub>GS</sub> =10V R <sub>G</sub> =10Ω; I <sub>D</sub> =7A (Note 3.4)	--	11.5	--	ns
Turn-on Rise Time	t <sub>r</sub>		--	26.3	--	







Turn-off Delay Time	$t_{d(off)}$	$V_{DD}=325V; V_{GS}=10V$ $R_G=10\Omega; I_D=7A$ (Note 3.4)	--	39.2	--	ns
Turn-off Fall Time	$t_f$		--	31.5	--	
Total Gate Charge	$Q_g$	$V_{DS}=520V, I_D=7A$ $V_{GS}=10V$ (Note 3.4)	--	15.5	--	nc
Gate-Source Charge	$Q_{gs}$		--	4.3	--	
Gate-Drain Charge	$Q_{gd}$		--	6.6	--	

**SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS**







Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Continuous Source Current	$I_S$	Integral Reverse P-N Junction Diode in the MOSFET	--	--	7	A
Pulsed Source Current	$I_{SM}$		--	--	28	
Diode Forward Voltage	$V_{SD}$	$I_S=7A, V_{GS}=0V$	--	0.82	1.2	V
Reverse Recovery Time	$T_{rr}$	$I_F=7A, V_R=520V,$ $dI/dt=100A/\mu S$	--	521	--	ns
Reverse Recovery Charge	$Q_{rr}$		--	3.6	--	$\mu C$

1. Pulse width limited by maximum junction temperature
2.  $L=10mH, I_{AS}=6A, V_{DD}=100V, V_G=10V, R_G=25\Omega,$  starting  $T_J=25^\circ C$
3. Pulse Test: Pulse width  $\leq 300\mu s,$  Duty cycles  $\leq 2\%$
4. Essentially independent of operating temperature

Typical Performance Characteristics

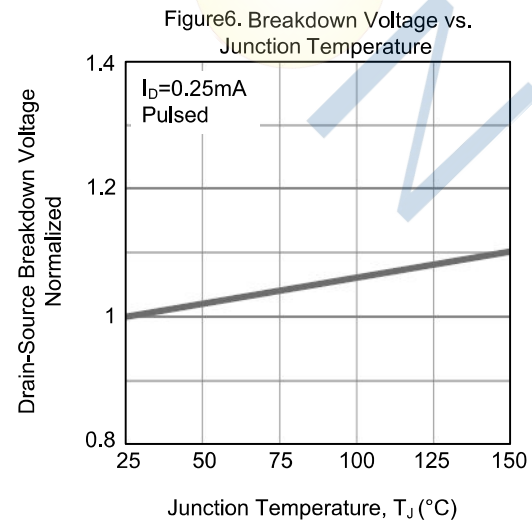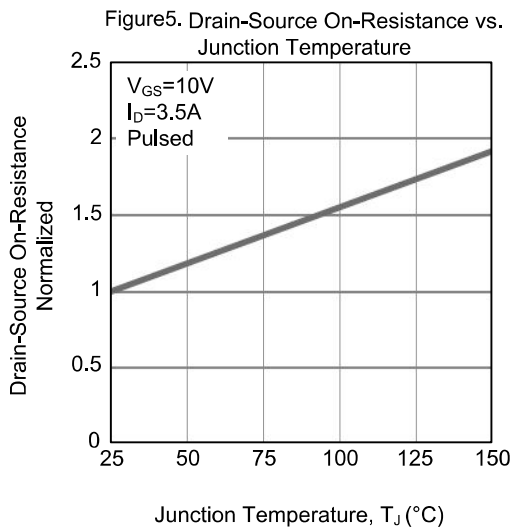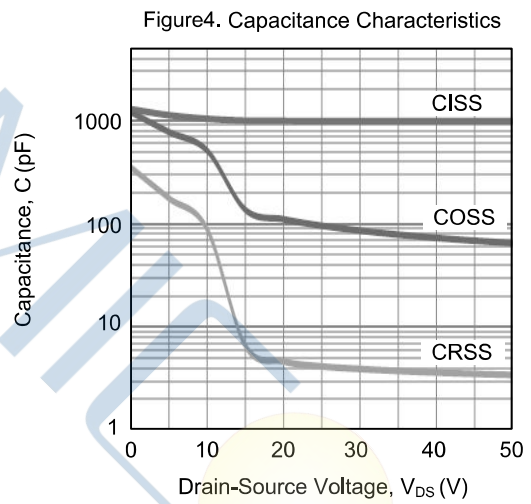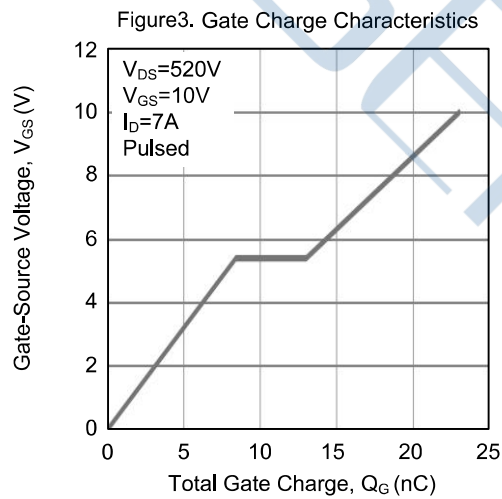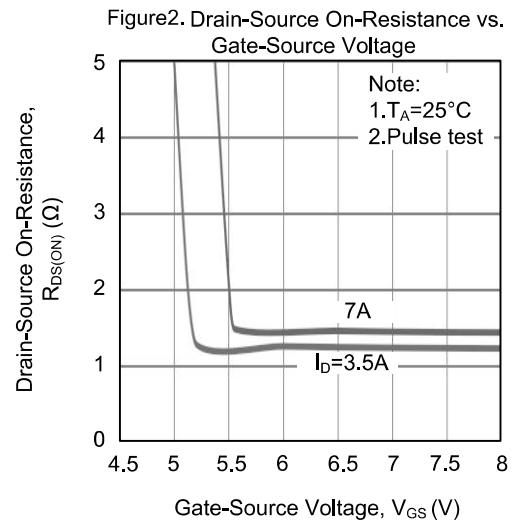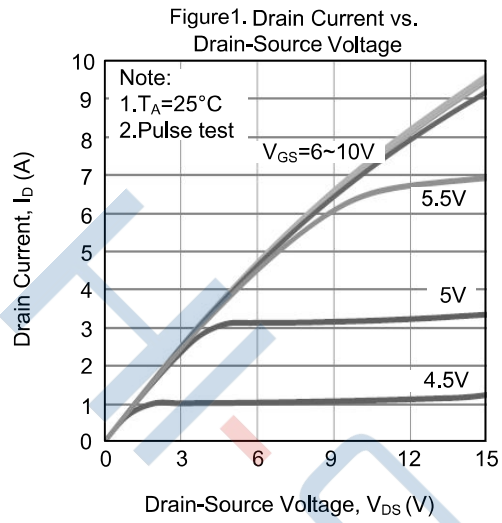


Typical Performance Characteristics

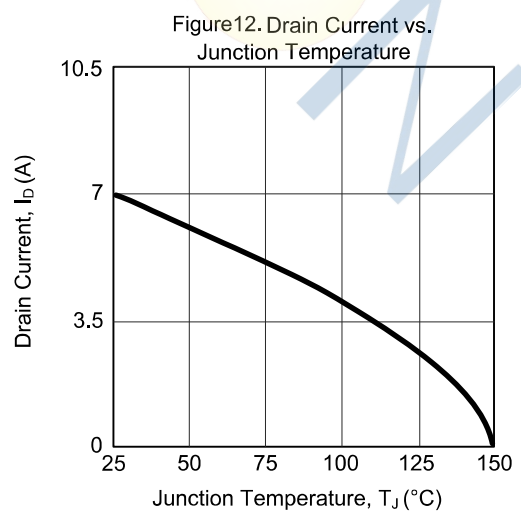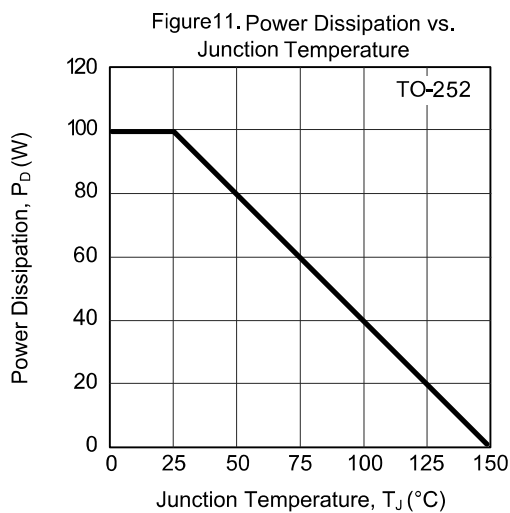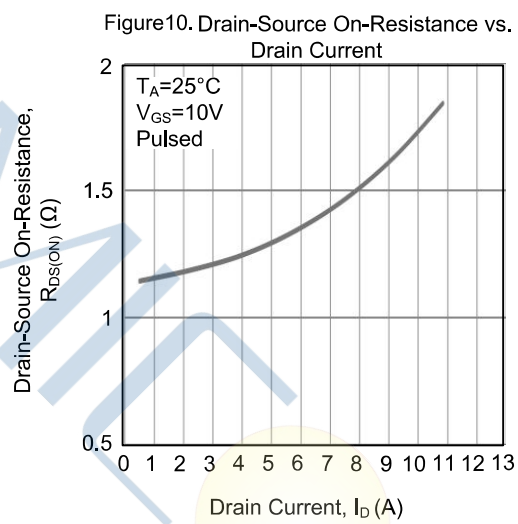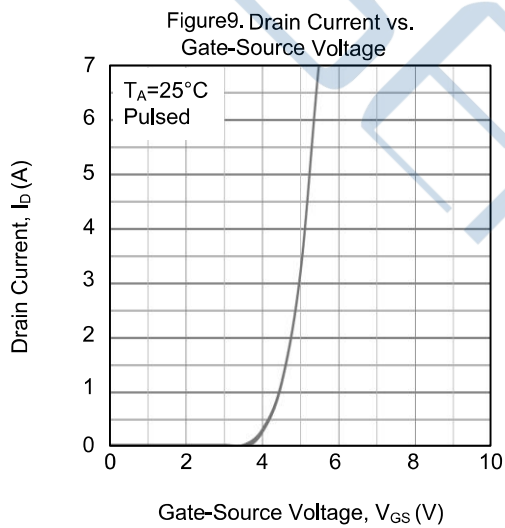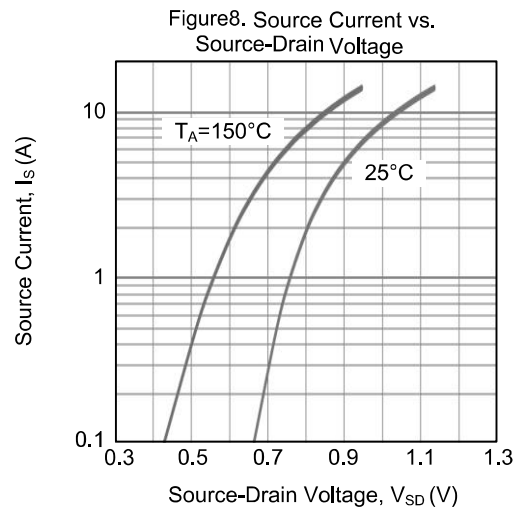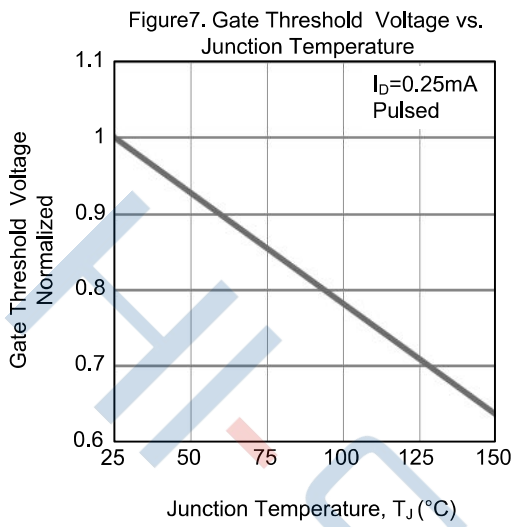


Typical Performance Characteristics


Figure13. Safe Operating Area

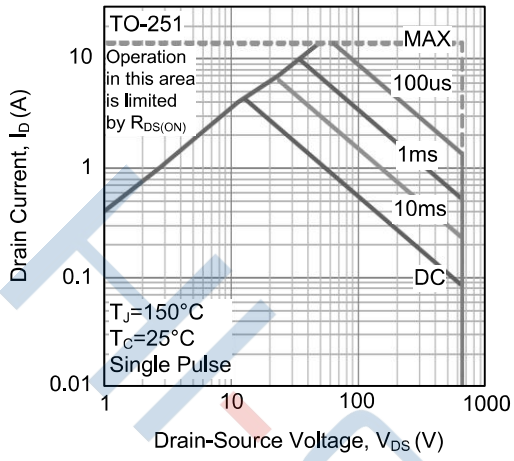

Test Circuit

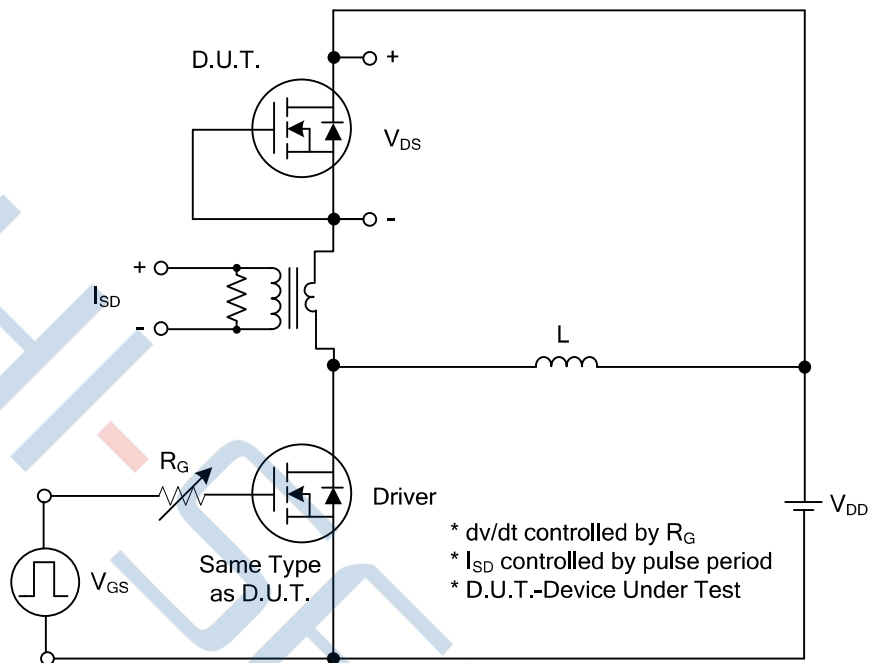


Peak Diode Recovery  $dv/dt$  Test Circuit

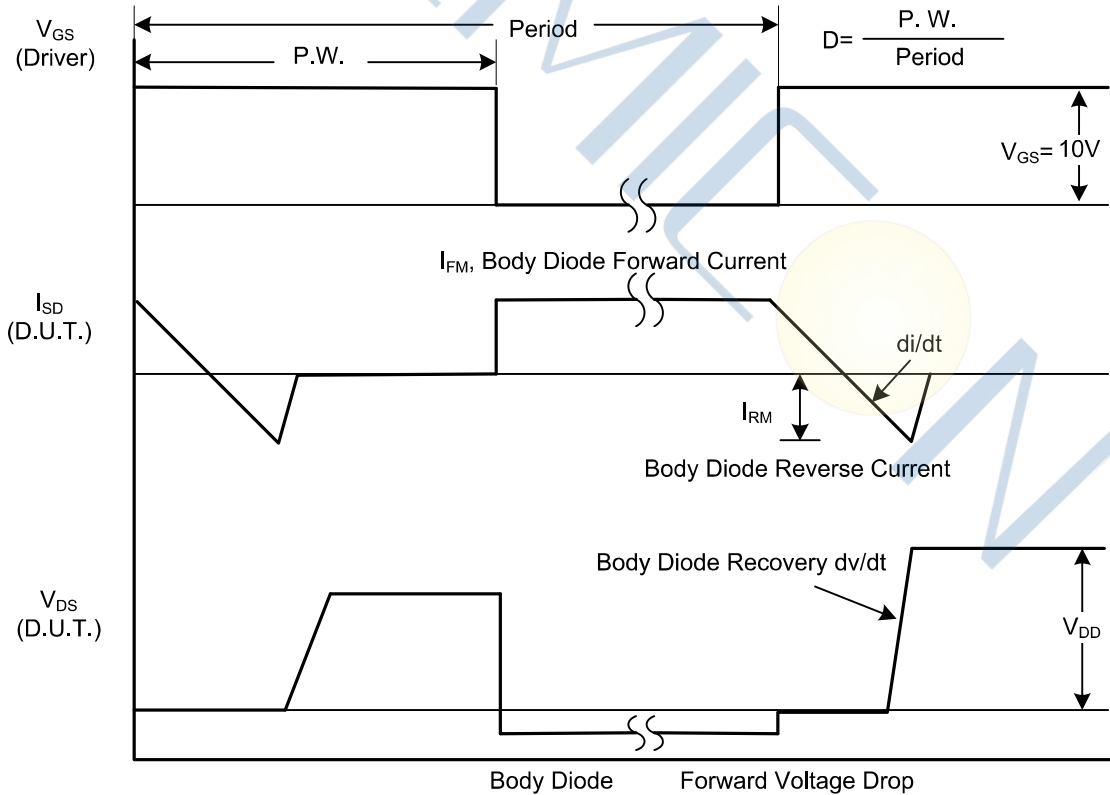


Peak Diode Recovery  $dv/dt$  Waveforms


Test Circuit

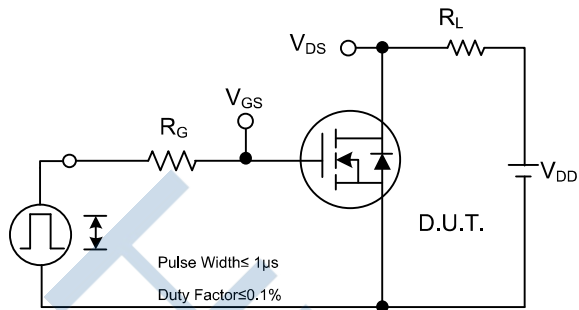


Switching Test Circuit

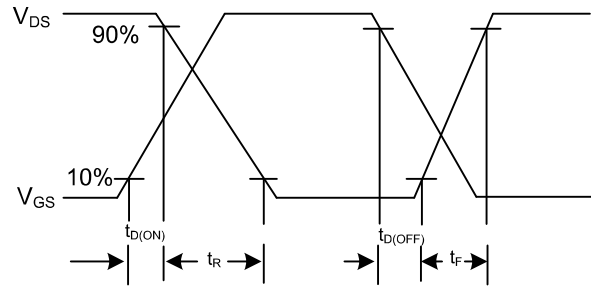


Switching Waveforms

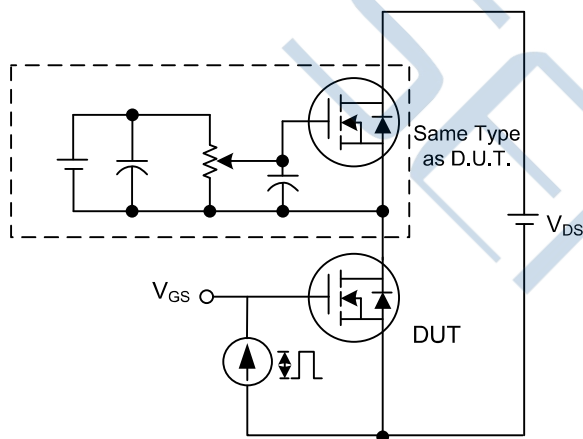


Gate Charge Test Circuit

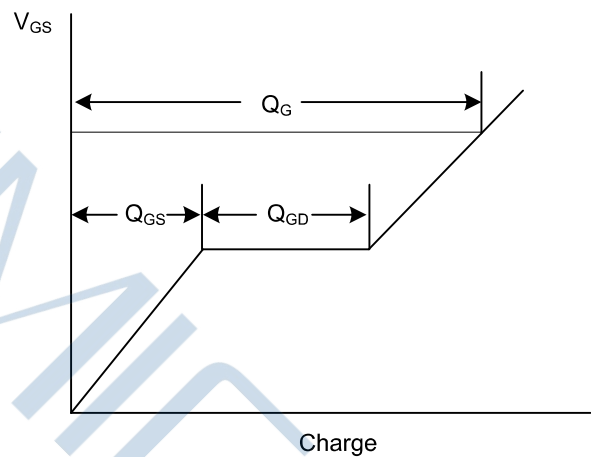

Gate Charge Waveform

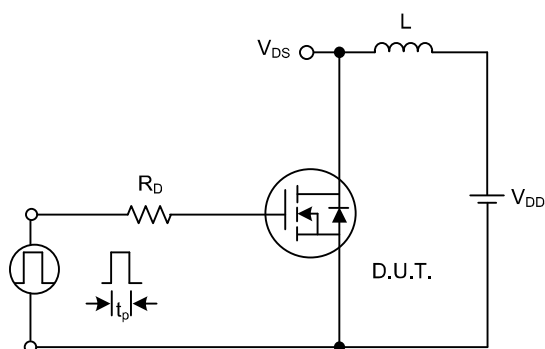


Unclamped Inductive Switching Test Circuit

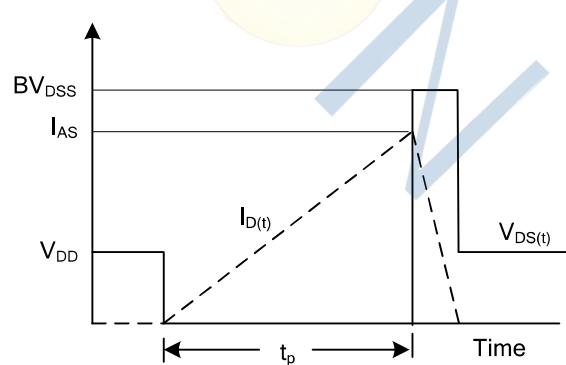

Unclamped Inductive Switching Waveforms


Package Dimensions of TO-252-2L

Unit:mm

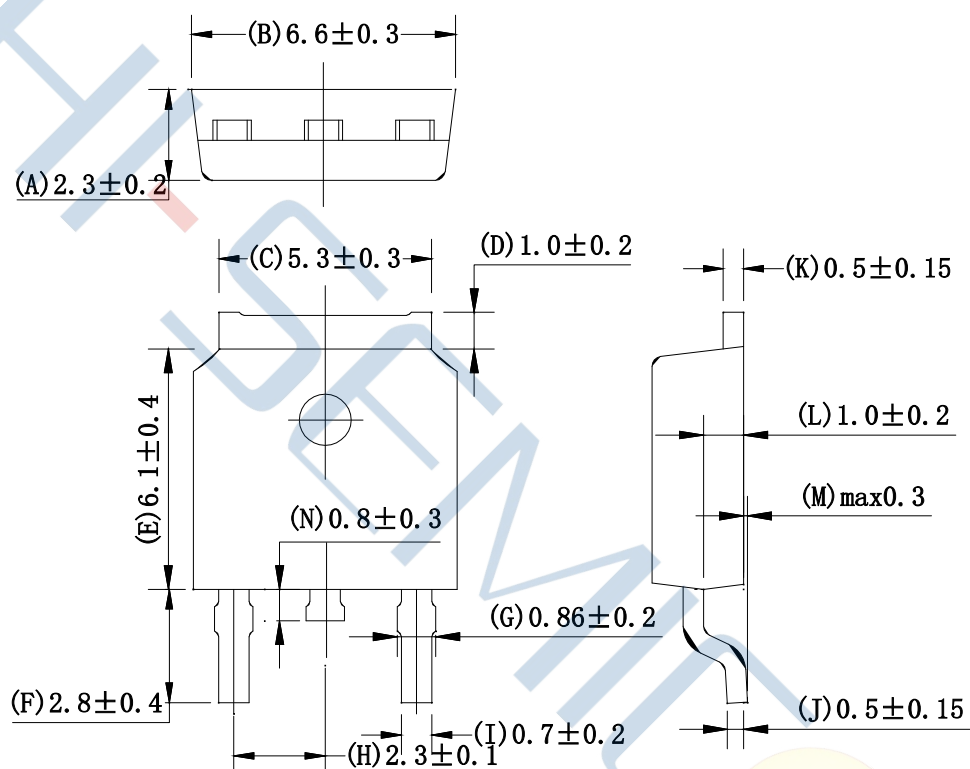

Package Dimensions of TO-252-2L

Unit:mm

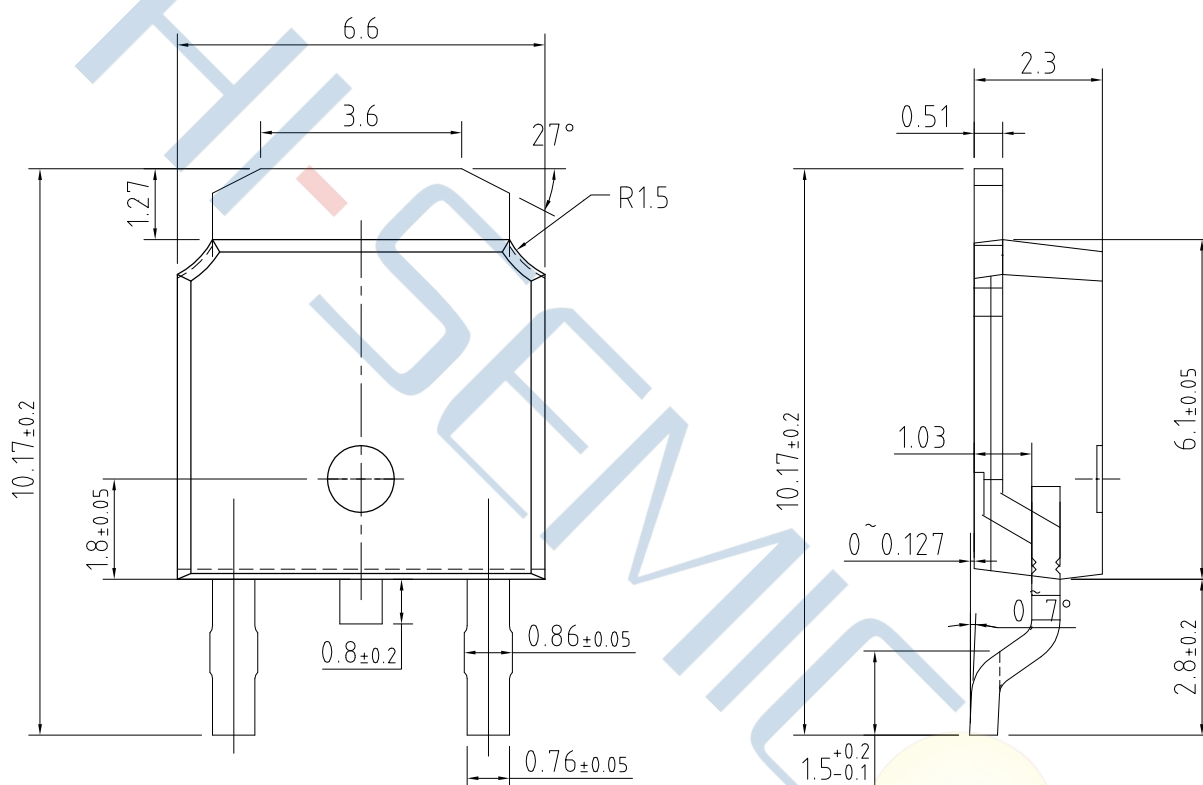

**Disclaimer:**

- ▶ Hi-semicon reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- ▶ All semiconductor products malfunction or fail with some probability under special conditions. When using Hi-semicon products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Hi-semicon products could cause loss of body injury or damage to property.
- ▶ Hi-semicon will supply the best possible product for customers!