


ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	2018-1-9		

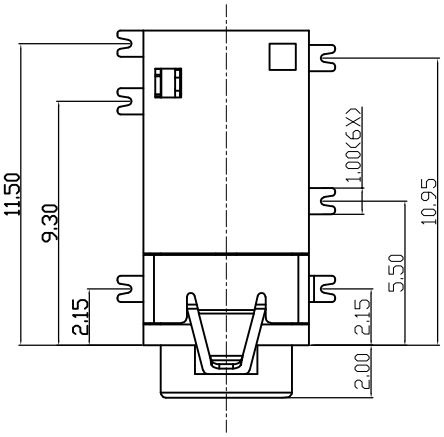


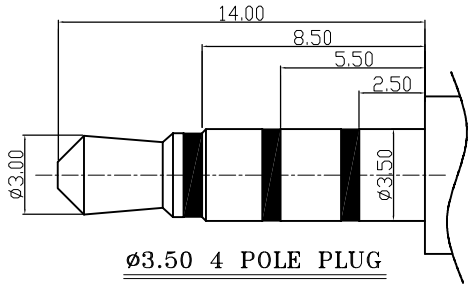



ø3.50 4 POLE PLUG





SCHEMATIC

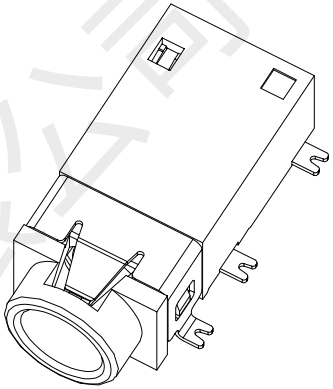

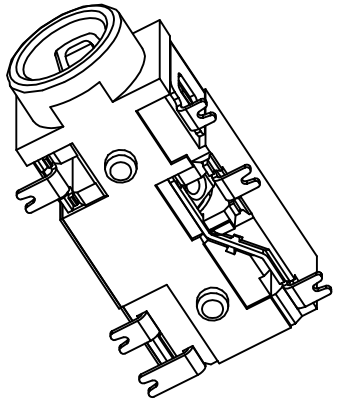





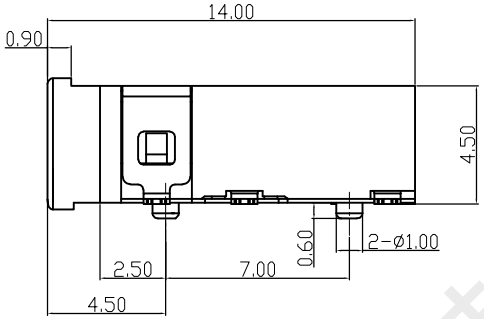



NOTES:
1.MATERIAL:
1.1 HOUSING: UL94V-0,COLOR: BLACK
1.2 CONTACT: SUS ALLOY
2.PLATING:
2.1 CONTACTS PLATING: SEE ORDERING INFORMATION
3.RATING
3.1 OPERATING VOLTAGE: 30VAC/DC.
3.2 CURRENT RATING: 0.5A AC/DC.
3.3 OPERATING TEMPERATURE: -25°C~+85°C

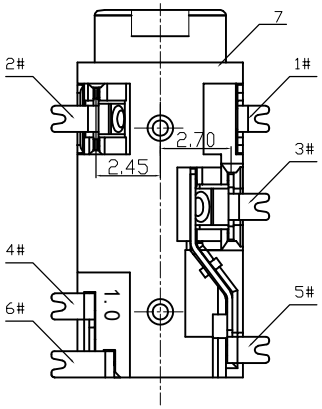

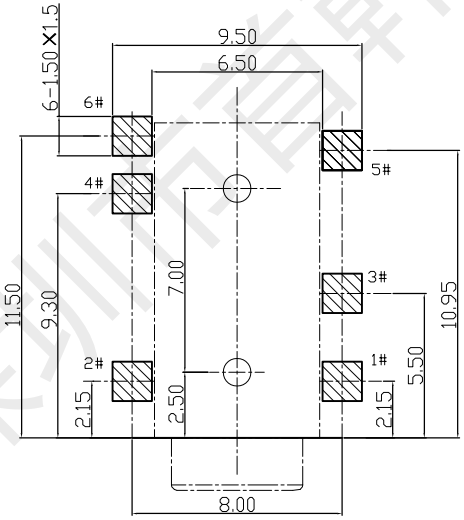

RECOMMEND PCB LAYOUT

TOLERANCE ±0.05

LINEAR	ANGLE
X.±	X.° ±
.X± 0.38	.X° ±
.XX± 0.25	.XX° ±
.XXX±	.XXX°
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

NAME(INTENDED USE)	PHONE JACK
PART NO.(INTENDED USE)	
APPD:	罗孝金
CHKD:	钟华华
DR:	李春风

深圳市首韩科技有限公司

TITLE: PJ-342-6P有头带开关大双柱 312

DWG NO.: C-0067

UNITS	SCALE	SHEET	REV.
mm	N/A	1/1	A0

深圳市首韩科技有限公司